





# WA-6

12V MR16 35W Halogen/8W LED Wall Mount

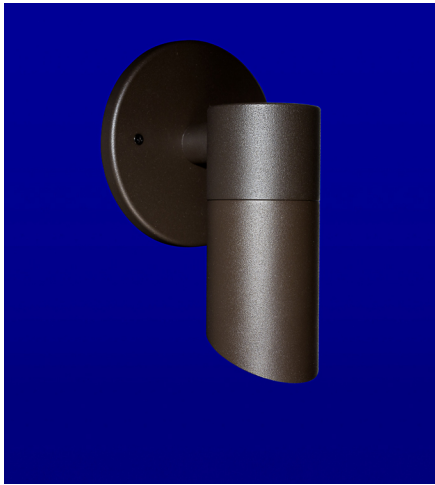

WA-6 Shown in Bronze Texture Powder Coat Finish (BZT)



Dimensions: 2 1/2" dia. x 6"

- 30° angled lens cap; holds up to three accessories.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1	2	3	4
PRODUCT	MATERIAL	MOUNTING PLATE	FINISH
WA-6	A		

Sample Part Number: WA-6-A-1-BK



1	2	3	4
PRODUCT	MATERIAL	MOUNTING PLATE	FINISH
WA-6	A Aluminum	1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White



# WA-6

12V MR16 35W Halogen/8W LED Wall Mount

## 1 PRODUCT - DIMENSIONS



## 2 MATERIAL




Aluminum

## 3 MOUNTING PLATE

Three mounting plate options



4/0 Round Mounting Plate  
MT-25



4/0 Square Mounting Plate  
MT-26



3/0 Round Mounting Plate  
MT-27

## 4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White











WA-6

12V MR16 35W Halogen/8W LED Wall Mount







ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

<div>BL</div> <div></div> <div>Blue Glass Filter</div> <div>To order separately use AY-2-MR-16-BL</div>	<div>LB</div> <div></div> <div>Light Blue Glass Filter</div> <div>To order separately use AY-2-MR-16-LB</div>	<div>PK</div> <div></div> <div>Pink Glass Filter</div> <div>To order separately use AY-2-MR-16-PK</div>	<div>AM</div> <div></div> <div>Amber Glass Filter</div> <div>To order separately use AY-2-MR-16-AM</div>	<div>MV</div> <div></div> <div>Mercury Vapor Glass Filter</div> <div>To order separately use AY-2-MR-16-MV</div>	<div>RD</div> <div></div> <div>Red Glass Filter</div> <div>To order separately use AY-2-MR-16-RD</div>	<div>GR</div> <div></div> <div>Green Glass Filter</div> <div>To order separately use AY-2-MR-16-GR</div>	<div>DA</div> <div></div> <div>Dichroic Amber Glass Filter</div> <div>To order separately use AY-2-MR16-DA</div>
--	--	--	---	---	---	---	---



ACCESSORIES - LENS

Holds up to three accessories

<div>SP</div> <div></div> <div>Spread Lens</div> <div>To order separately use AY-1-MR16-1</div>	<div>LI</div> <div></div> <div>Linear Lens</div> <div>To order separately use AY-1-MR16-2</div>	<div>SO</div> <div></div> <div>Softening Lens</div> <div>To order separately use AY-1-MR16-3</div>	<div>LV</div> <div></div> <div>Louver Lens</div> <div>To order separately use AY-1-MR16-4</div>	<div>WI</div> <div></div> <div>Wire Holder</div> <div>To order separately use AY-1-MR16-5</div>	<div>FR</div> <div></div> <div>Frosted Lens</div> <div>To order separately use AY-1-MR16-6</div>
--	--	---	--	--	---

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain  
Maximum wattage: 35W Halogen/8W LED

<div>MR16</div> <div></div> <div>EMERY ALLEN</div> <div>1.0W, 3.0W, 5.0W, 7.0W</div>	<div>MR16</div> <div></div> <div>EMERY ALLEN</div> <div>3W AMBER</div>
---	---

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS