




WA-4

12V MR16 35W Halogen/8W LED Wall Mount

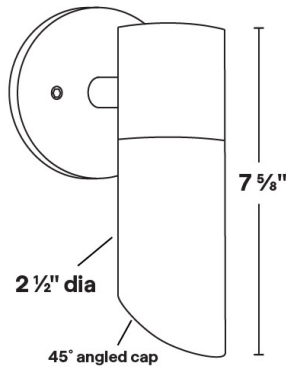

- 45° angled lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

WA-4 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 2 1/2" dia. x 7 5/8"

| 1 | 2 | 3 | 4 |
|---------|----------|----------------|--------|
| PRODUCT | MATERIAL | MOUNTING PLATE | FINISH |
| WA-4 | A | | |

Sample Part Number: WA-4-A-1-BK

| 1 | 2 | 3 | 4 |
|---------|------------|---|--|
| PRODUCT | MATERIAL | MOUNTING PLATE | FINISH |
| WA-4 | A Aluminum | 1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate | BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



WA-4

12V MR16 35W Halogen/8W LED Wall Mount

1 PRODUCT - DIMENSIONS

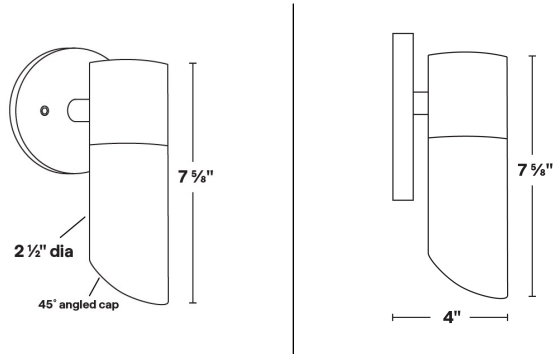

2 MATERIAL




3 MOUNTING PLATE

Three mounting plate options



4 FINISH

Eight Standard TGIC Free powder coat finishes

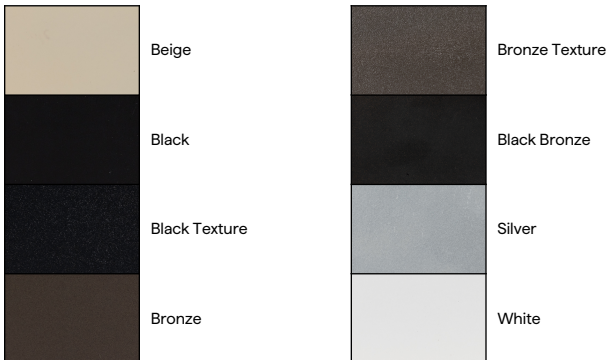











WA-4

12V MR16 35W Halogen/8W LED Wall Mount







ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

| | | | | | | | |
|---|---|---|--|--|--|--|--|
| BL  Blue Glass Filter To order separately use AY-2-MR-16-BL | LB  Light Blue Glass Filter To order separately use AY-2-MR-16-LB | PK  Pink Glass Filter To order separately use AY-2-MR-16-PK | AM  Amber Glass Filter To order separately use AY-2-MR-16-AM | MV  Mercury Vapor Glass Filter To order separately use AY-2-MR-16-MV | RD  Red Glass Filter To order separately use AY-2-MR-16-RD | GR  Green Glass Filter To order separately use AY-2-MR-16-GR | DA  Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA |
|---|---|---|--|--|--|--|--|



ACCESSORIES - LENS

Holds up to three accessories

| | | | | | |
|---|---|--|---|---|--|
| SP  Spread Lens To order separately use AY-1-MR16-1 | LI  Linear Lens To order separately use AY-1-MR16-2 | SO  Softening Lens To order separately use AY-1-MR16-3 | LV  Louver Lens To order separately use AY-1-MR16-4 | WI  Wire Holder To order separately use AY-1-MR16-5 | FR  Frosted Lens To order separately use AY-1-MR16-6 |
|---|---|--|---|---|--|

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8 watt LED

| | |
|--|---|
| MR16  EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W | MR16  EMERY ALLEN 3W AMBER |
|--|---|

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

| DIMMING PROTOCOL | OUTDOOR |
|---------------------|--|
| | LANDSCAPE LIGHTING |
| Phase | Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS |