
EXCELSIOR PL-28

120V PAR20 35W Halogen/11W LED Staff Light



PL-28 Shown in Bronze Texture Powder Coat Finish (BZT)

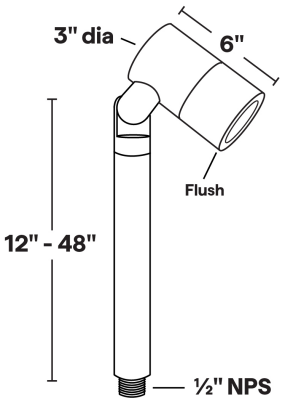

Dimensions: 3" dia. x 6"

- Available in three Cap Styles: Flush, 1" Regress, 30° Angled
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- Conduit mounting stake included
- Stems lengths of 12"- 48" available.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seals are used to seal the cap against the body.
- Molded silicone wire pass-thru is attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/9W LED
- Socket: Medium base ceramic socket
- Wet Listed
- Specification-grade, wet-location landscape luminaire for path or garden lighting applications.

1 PRODUCT	2 MATERIAL	3 CAP	4 MOUNTINGS	5 STEM LENGTH	6 FINISH
PL-28	A		2		

Sample Part Number: **PL-28-A-1-1-24-BK**

1 PRODUCT

PL-28	

2 MATERIAL

A	Aluminum

3 CAP

1	Flush
2	Regress
3	45 Degree

4 MOUNTINGS

2	Q-MT-25

5 STEM LENGTH

12	12" Stem Length
18	18" Stem Length
24	24" Stem Length
30	30" Stem Length
36	36" Stem Length
42	42" Stem Length
48	48" Stem Length

6 FINISH

BG	Beige
BB	Black Bronze
BK	Black
BKT	Black Texture
BZ	Bronze
BZT	Bronze Texture
SL	Silver
WH	White

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance


© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting


Specification subject to change. Rev-11-11-26


EXCELSIOR PL-28

120V PAR20 35W Halogen/11W LED Staff Light

1 PRODUCT - DIMENSIONS







2 MATERIAL

Aluminum

6 FINISH

Eight Standard TGIC Free powder coat finishes

Beige

Black

Black Texture

Bronze

Bronze Texture


Black Bronze

Silver

White

ACCESSORIES - MOUNTING

Q-MT-25



1 Gang Recess
J-Box Plate

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting

Specification subject to change. Rev-11-11-26

EXCELSIOR PL-28

120V PAR20 35W Halogen/11W LED Staff Light

LAMPS

PAR20 Halogen or LED; Medium Base Ceramic Socket
Maximum wattage: 35W Halogen/11W LED

PAR20



SORAA VIVID

11.0W

PAR20



SORAA BRILLIANT

8.0W, 11.0W

© 2026 QTL. All rights reserved | 155 Hill St. Milford, CT 06460 | 203-367-8777 | sales@QTL.lighting | www.QTL.lighting