



VERS-LOUVER-SK (07) STATIC COLOR

24VDC Linear Fixtures - Suspended



- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors
- A VERSatile fixture with a black louver that is designed to eliminate glare
- A custom-sized black louver fits snugly above a low-profile clear or diffused lens in the interior of the housing
- Features integrated metal endcaps and durable anodized aluminum housings
- With standard internal White Optics coating, fixtures achieve greater lumen efficacies
- Consult factory for field assembly options

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
VERS-07-SK-SC	5.0				N/A	S2	BW	CLS	SV	AWM	SK			

Sample Part Number: **VERS-07-SC-5.0-GR-DRY-DF-P1-CON6-CON6-BK-CL2-MG-BK-48"-E**


1 PRODUCT VERS-07-SK-SC See following pages for compatible power supplies.	2 WATTS/FT 5.0 5.0W/ft	3 CCT A Amber B Blue G Green R Red	4 RATED DRY IP20 DMP IP54	5 LENS DF Diffused CL Clear	6 EXTERNAL LOUVER N/A No Louver
					For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.
7 WIRE INPUT/OUTPUT S2 Single 2 (Input only) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36")	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)	10 WIRE COLOR SV Silver		
					BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)
					BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
11 WIRE TYPE AWM Appliance Wiring Material	12 MOUNTING SK Suspension Bracket	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length	
					Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.
					Custom finishes require a longer lead time, consult factory.



VERS-LOUVER-SK (07) STATIC COLOR

24VDC Linear Fixtures - Suspended

1 PRODUCT - DIMENSIONS



Profile with lens

2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]

Tested with VERS-07-SK-SC-5.0-**-DRY

	Red			Green			Blue			Amber		
	LM/FT	Wavelength	UGR									
CL	60	635	≤ 12.5	280	519	≤ 18.4	66	467	≤ 13.2	46	595	≤ 11.9
DF	51	634	≤ 12.9	235	519	≤ 18.4	55	467	≤ 13.3	35	596	≤ 11.4

5 DIODE VISIBILITY


PHOTOMETRIC PERFORMANCE



DF - Diffused lens

CL - Clear lens

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



TEMPERATURE RATINGS

	Ambient Operating Temp - Surface	5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F




VERS-LOUVER-SK (07) STATIC COLOR


24VDC Linear Fixtures - Suspended

7 WIRE INPUT/ OUTPUT

SINGLE (Input only)




CONFIGURATION OPTIONS

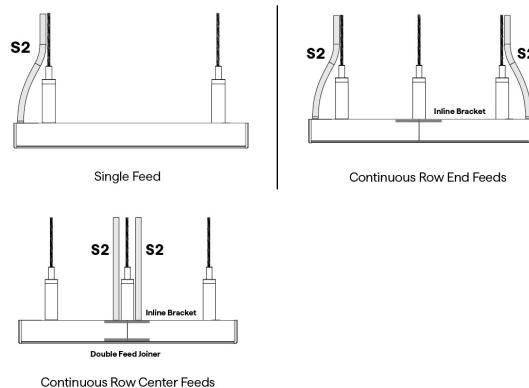

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.




Bare Wire 36" | 22 AWG
Clear outer jacket, metal shield

10 WIRE COLOR




Silver

12 MOUNTING



2 required up to 6' lengths;
additional support required
between 6' to 8'

13 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer
lead time, consult factory




VERS-LOUVER-SK (07) STATIC COLOR

24VDC Linear Fixtures - Suspended

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

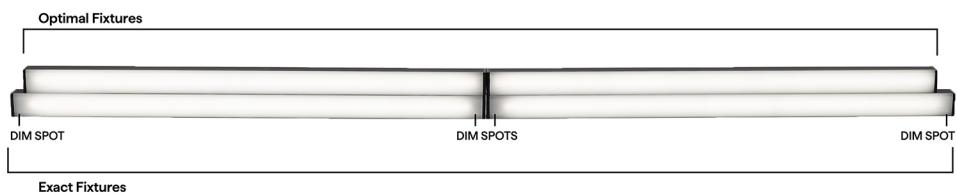

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle




VERS-LOUVER-SK (07) STATIC COLOR

24VDC Linear Fixtures - Suspended

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-DC+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle

COMPATIBLE WIRING ACCESSORIES

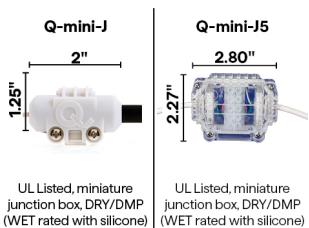

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage