




FA-4

12V MR16 35W Halogen/8W LED
Flood/Accent



FA-4 Shown in Bronze Texture Powder Coat Finish
(BZT)

Knuckle: Tapered & Positive Locking

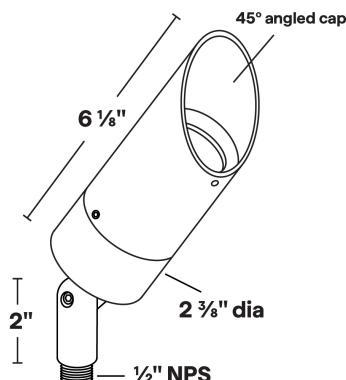

Dimensions: 2 3/8" dia. x 6 1/8"

- 45° angled lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2 of 18/2 LV wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

① PRODUCT	② MATERIAL	③ FINISH
FA-4	A	

Sample Part Number: **FA-4-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
FA-4	A Aluminum	<p>BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White</p>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



FA-4

12V MR16 35W Halogen/8W LED Flood/Accent

1 PRODUCT - DIMENSIONS




2 MATERIAL



Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available

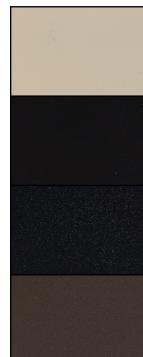

Beige

Black

Black Texture

Bronze



Bronze Texture


Black Bronze

Silver

White


ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.




Blue Glass Filter

To order separately
use AY-2-MR16-BL




Light Blue
Glass Filter

To order separately
use AY-2-MR16-LB




Pink Glass Filter

To order separately
use AY-2-MR16-PK




Amber Glass Filter

To order separately
use AY-2-MR16-AM



Mercury Vapor
Glass Filter

To order separately
use AY-2-MR16-MV




Red Glass Filter

To order separately
use AY-2-MR16-RD



Green Glass Filter

To order separately
use AY-2-MR16-GR



Dichroic Amber
Glass Filter

To order separately
use AY-2-MR16-DA



FA-4

12V MR16 35W Halogen/8W LED Flood/Accent

ACCESSORIES - LENS

Holds up to three accessories



ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately



LAMPS

MR16 Halogen or LED: GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS