


**FD-6**12V GY6.35/G4 20W Halogen/3.5W LED
Accent LightFD-6 Shown in Bronze Texture Powder Coat Finish
(BZT)

Knuckle: Tapered & Positive Locking

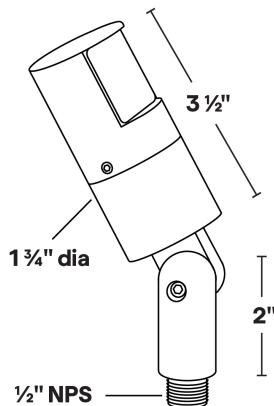

Dimensions: 1 3/4" dia. x 3 1/2"

- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 2' of 18/2 LV wire leads.
- Frosted tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20W Halogen/3.5W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain (accepts G4 Lamps)
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

① PRODUCT	② MATERIAL	③ FINISH
FD-6	A	

Sample Part Number: **FD-6-A-BK**

1 PRODUCT	2 MATERIAL	3 FINISH
FD-6	A Aluminum	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



FD-6

12V GY6.35/G4 20W Halogen/3.5W LED Accent Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



Aluminum

3 FINISH

Eight Standard TGIC Free powder coat finishes available

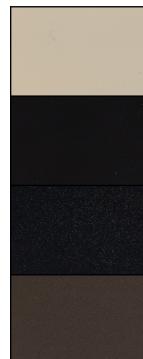

Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately



Ground Stake



Adjustable Ground Stake



Stainless Steel Ground Spike



Stainless Steel Ground Spike



Stainless Steel Ground Spike



FD-6

12V GY6.35/G4 20W Halogen/3.5W LED Accent Light

LAMPS

G4 Halogen or LED: GY-6.35 Bi-Pin Porcelain (accepts G4 Lamps)
Maximum wattage: 20W Halogen/3.5W LED

G4



EMERY ALLEN

3.0W

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS