




UD-2

12V MR11 20W, 2W LED Up Light

5 YEAR
WARRANTY

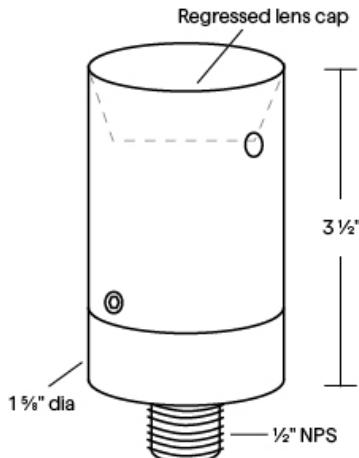

- Aluminum components are black anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- 1/2" NPS mount threads (Mount not included.)
- Tempered clear glass lens.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 20 watt, 2 watt LED
- Input Voltage: 12V (remote transformer required)
- Socket: GY 6.35 Bi-Pin Porcelain
- Wet Listed
- Specification-grade landscape lighting, wet-location luminaire for uplighting applications.

UD-2 Shown in Bronze Powder Coat Finish (BZ)

Dimensions: 1 5/8" dia. x 3 1/2" overall

1 PRODUCT	2 MATERIAL	3 FINISH
UD-2	A	

Sample Part Number: **UD-2-A-BK**


1	PRODUCT	2	MATERIAL	3	FINISH
	UD-2		A Aluminum		BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White



UD-2

12V MR11 20W, 2W LED Up Light

1 PRODUCT - DIMENSIONS




2 MATERIAL



Aluminum


3 FINISH

Eight Standard TGIC powder coat finishes available

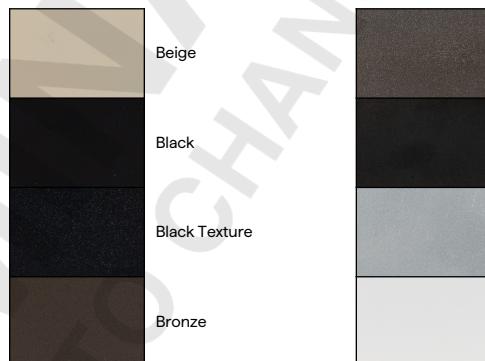


ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.



Blue Glass Filter
To order separately
use AY-2-MR11-BL




Light Blue Glass Filter
To order separately
use AY-2-MR11-LB




Pink Glass Filter
To order separately
use AY-2-MR11-PK




Amber Glass Filter
To order separately
use AY-2-MR11-AM




Mercury Vapor Glass Filter
To order separately
use AY-2-MR11-MV



Red Glass Filter
To order separately
use AY-2-MR11-RD



Green Glass Filter
To order separately
use AY-2-MR11-GR



Dichroic Amber Glass Filter
To order separately
use AY-2-MR11-DA



UD-2

12V MR11 20W, 2W LED Up Light

ACCESSORIES - LENS

Holds up to three accessories



ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately



LAMPS

MR11 Halogen or LED; GY-6.35 Bi-Pin Porcelain Maximum wattage: 20 Watt, 2 Watt LED



COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS