




WA-29

120V PAR20 35W Halogen/11W LED Dual Wall Mount

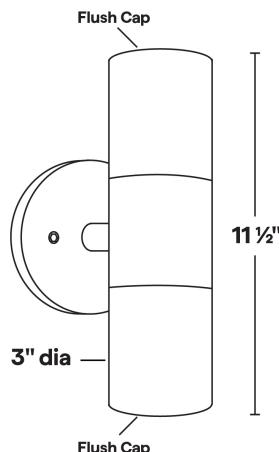

WA-29 Shown in Bronze Texture
Powder Coat Finish (BZT)

Dimensions: 3" dia. x 11 1/2"

- Two Flush lens caps; holds up to two accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- Junction box mount design.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen(x2)/11 watt LED(x2)
- Input Voltage: 120V
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

| 1 PRODUCT | 2 MATERIAL | 3 MOUNTING PLATE | 4 FINISH |
|--------------|---------------|---------------------|-------------|
| WA-29 | A | | |

Sample Part Number: **WA-29-A-1-BK**

| 1 PRODUCT | 2 MATERIAL | 3 MOUNTING PLATE | 4 FINISH |
|--------------|---------------|---|--|
| WA-29 | A Aluminum | 1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate | BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



WA-29

120V PAR20 35W Halogen/11W LED Dual Wall Mount

1 PRODUCT - DIMENSIONS

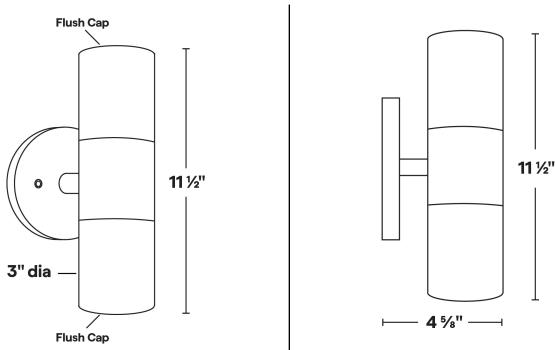

2 MATERIAL



Aluminum

3 MOUNTING PLATE

Three mounting plate options



4/0 Round
Mounting Plate
MT-25



4/0 Square
Mounting Plate
MT-26



3/0 Round
Mounting Plate
MT-27

4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White



WA-29

120V PAR20 35W Halogen/11W LED Dual Wall Mount

ACCESSORIES - LENS

Holds up to two accessories

| SP | LI | SO | LV | WI | FR |
|--|--|---|--|--|---|
| | | | | | |
| Spread Lens To order separately use AY-1-PAR20-1 | Linear Lens To order separately use AY-1-PAR20-2 | Softening Lens To order separately use AY-1-PAR20-3 | Louver Lens To order separately use AY-1-PAR20-4 | Wire Holder To order separately use AY-1-PAR20-5 | Frosted Lens To order separately use AY-1-PAR20-6 |

LAMPS

PAR20 Medium base ceramic

Maximum wattage: 35W Halogen(x2)/11W LED(x2)

| PAR20 | PAR20 |
|----------------------|--------------------------------|
| | |
| SORAA VIVID 11.0W | SORAA BRILLIANT 8.5W, 11.0W |