



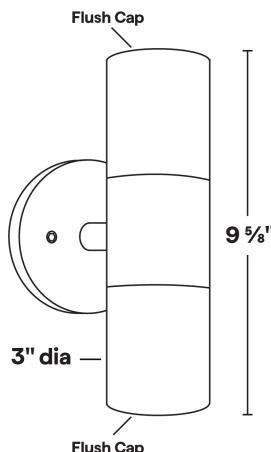

WA-38

120V GU10 35W Halogen/8W LED Dual Wall Mount

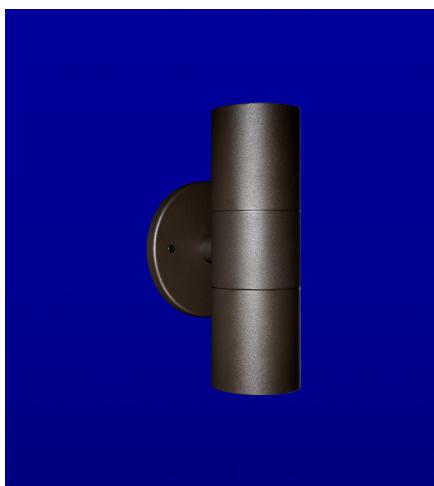

WA-38 Shown in Bronze Texture
Powder Coat Finish (BZT)

Dimensions: 3" dia. x 9 5/8"

- Two Flush lens caps; holds up to two accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- Junction box mount design.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen(x2)/8 watt LED (x2)
- Input Voltage: 120V
- Socket: GU10 Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 FINISH
WA-38	A		

Sample Part Number: **WA-38-A-1-BK**

1 PRODUCT	2 MATERIAL	3 MOUNTING PLATE	4 FINISH
WA-38	A Aluminum	1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



WA-38

120V GU10 35W Halogen/8W LED Dual Wall Mount

1 PRODUCT - DIMENSIONS

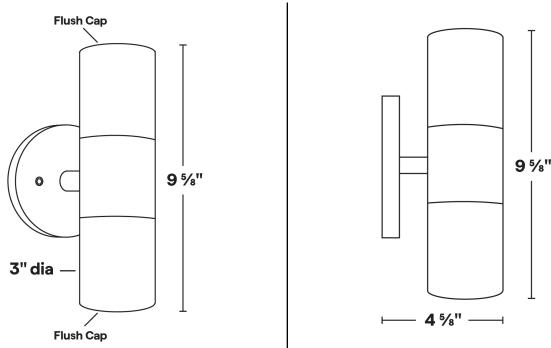

2 MATERIAL



Aluminum

3 MOUNTING PLATE

Three mounting plate options



4/0 Round
Mounting Plate
MT-25



4/0 Square
Mounting Plate
MT-26



3/0 Round
Mounting Plate
MT-27

4 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White



WA-38

120V GU10 35W Halogen/8W LED Dual Wall Mount

LAMPS

MR16 Halogen or LED; GU10 Porcelain

Maximum wattage: 35W Halogen(x2), 8W LED(x2)

