





ESSENTIALS FLUR™-FLAT (01)

RGBW HIGH EFFICACY

24VDC Linear Fixtures - Recessed

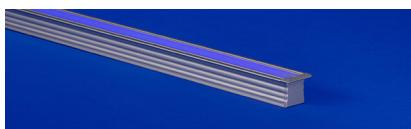

- Deep flanged recessed fixture
- Choose from diffused, polar, or frosted lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications
- 21 diodes per 2" cutpoint allowing for minimal diode visibility

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
												SST		

Sample Part Number: **FL1RGBW-4.0HE-30-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E**


1 PRODUCT FL1RGBW See following pages for compatible power supplies.	2 WATTS/FT 4.0HE 4.0W/ft HE 8.0HE 8.0W/ft HE	3 CCT 27 RGBW-2700K 30 RGBW-3000K 35 RGBW-3500K 40 RGBW-4000K 27 RGBW-2700K 30 RGBW-3000K 35 RGBW-3500K 40 RGBW-4000K	4 RATED DRY IP20 DMP IP54 DRY IP20	5 EFFICIENCY STD Standard WO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused PR Polar FR Frosted Clear Lens is not available for RGBW-HE. For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black		
For continuous mounting, consider bottom feed.					
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel	13 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS FLUR™-FLAT (01) RGBW HIGH EFFICACY

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

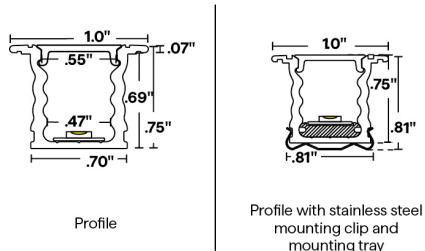

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with FL1RGBW-4.0HE-30-DRY-STD

	Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
45	27	629	104	516	23	465	64	97
60	28	629	106	516	23	465	65	97
80	29	629	112	516	24	465	69	97
FR	26	629	101	516	22	465	62	97
PR	22	629	83	516	18	465	51	97
DF	16	629	61	516	13	465	38	97

[Calculated L70 = 70000 hrs]
Tested with FL1RGBW-4.0HE-30-DRY-WO

	Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
45	30	629	115	516	25	465	71	97
60	30	629	116	516	25	465	71	97
80	31	629	120	516	26	465	74	97
FR	29	629	112	516	24	465	69	97
PR	25	629	95	516	20	465	58	97
DF	19	629	73	516	16	465	45	97


6 DIODE VISIBILITY



DF - Diffused lens
PR - Polar lens
FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

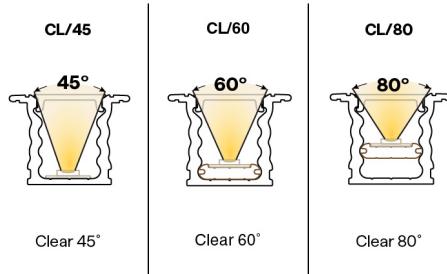



ESSENTIALS FLUR™-FLAT (01) RGBW HIGH EFFICACY


24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS


		4.0 HE W/FT		8.0 HE W/FT	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	115°F	-4°F	95°F
	Ambient Operating Temp - Surface	**	**	**	**
DMP	Ambient Operating Temp - Recessed	-4°F	110°F	**	**
	Ambient Operating Temp - Surface	**	**	**	**

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

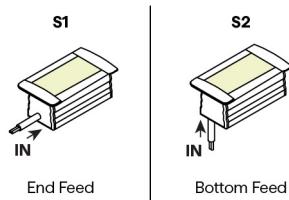

PASS THROUGH (Input/Output)

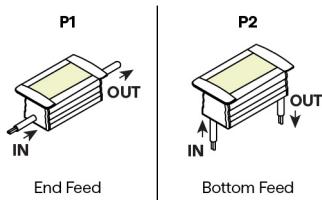


CONFIGURATION OPTIONS

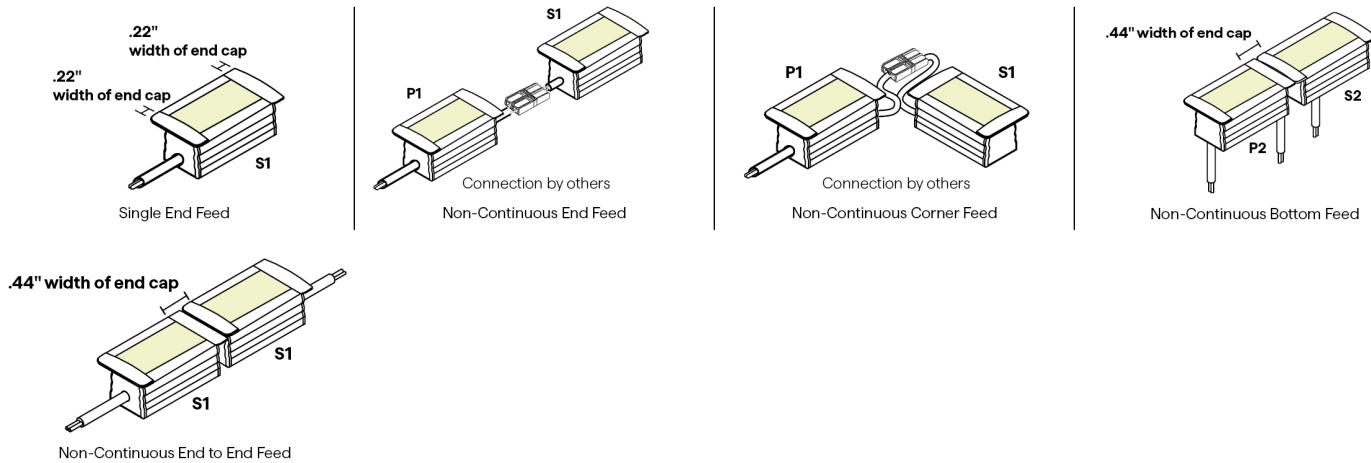

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

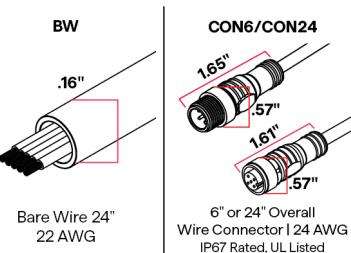

10 WIRE COLOR






ESSENTIALS FLUR™-FLAT (01) RGBW HIGH EFFICACY

24VDC Linear Fixtures - Recessed

12 MOUNTING

SST



Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head SS

13 FINISH



Satin

Black


Custom finishes require a longer
lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

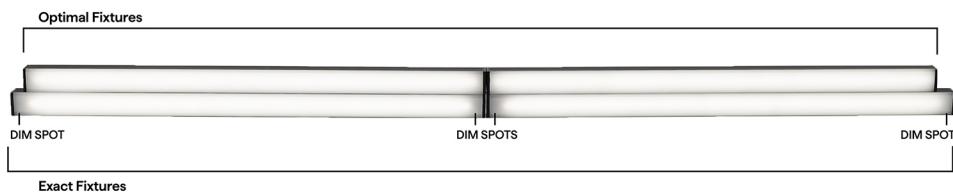



ESSENTIALS FLUR™-FLAT (01) RGBW HIGH EFFICACY

24VDC Linear Fixtures - Recessed

RGBW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	RGBW, RGBW-HE	
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	
1%		QZ-DALI-DT8
10%		Non-Dim Power Supply with RGBW App Dongle

DIMMING PROTOCOL	INDOOR	
	RGBW, RGBW-HE	
DMX	QTM-eLED+DMX QZ-DMX	
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	



ESSENTIALS FLUR™-FLAT (01) RGBW HIGH EFFICACY

24VDC Linear Fixtures - Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE	VHB
1.41" 0.71"	1.46" 1.29"	1.46" 4"	0.75" 1.03"	1.38" 2.23"	
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	Double sided mounting tape

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE	IQ-DMX-STICK-QA2	IQ-DMX-STICK-DE3
1.36" 2.58" Wi-Fi or Bluetooth Connectivity	DMX controller for changing color & dimming	DMX controller for changing color & dimming

COMPATIBLE APPS



Read and write DMX addresses and adjust voltage