




ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Surface mount linear fixture
- Choose from diffused, polar, frosted, clear 60°, or clear 70° lens options for varying diode visibility and beam angles
- Offered with an optional mounting tray
- Features all wire feed options
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled
- Optional plastic louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL

Sample Part Number: TQ1DW-2.5HE-20/30-DRY-WO-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT TQ1DW TQ1DW-USA Select USA option for BAA and BABA projects. LED engine is built with 3 wires requiring 0-10V, DALI or DMX or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	2 WATTS/FT 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K 24/30 2400K/3000K 27/40 2700K/4000K	4 RATED DRY IP20 DMP IP54	5 EFFICIENCY STD Standard WFO White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS DF Diffused PR Polar FR Frosted CL/60 Clear 60° CL/70 Clear 70° For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages For optional snap-on louver ordering, see External Louver Accessory section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black		
For continuous mounting, consider bottom or side feed	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have clip spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

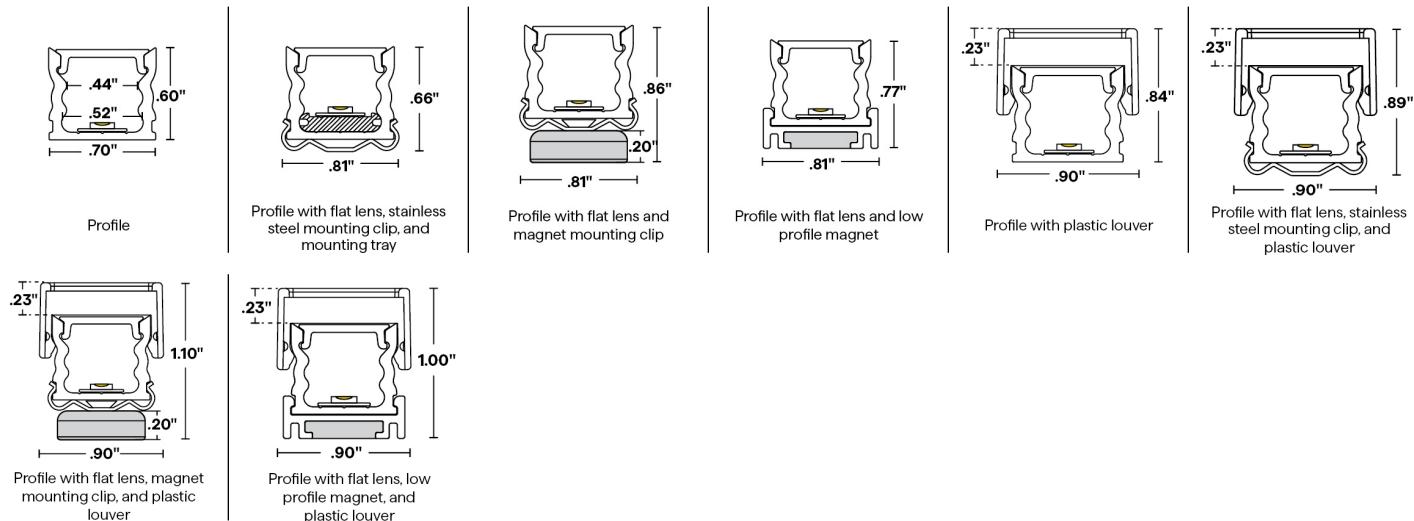

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with TQ1DW-**-30-DRY-STD

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	
60	125	98	198	98	307	98
70	127	98	200	98	311	98
FR	123	98	194	98	302	98
PR	110	98	174	98	271	98
DF	100	98	157	98	245	98

[Calculated L70 = 70000 hrs]
Tested with TQ1DW-**-30-DRY-WO

	1.5HE W/FT	2.5HE W/FT	4.0HE W/FT			
LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	
60	137	98	217	98	338	98
70	143	98	226	98	352	98
FR	135	98	213	98	331	98
PR	122	98	192	98	299	98
DF	108	98	171	98	266	98


6 DIODE VISIBILITY



- DF - Diffused lens
- PR - Polar lens
- FR - Frosted lens
- CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	130°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	135°F	-4°F	115°F	**	**	**	**

7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)

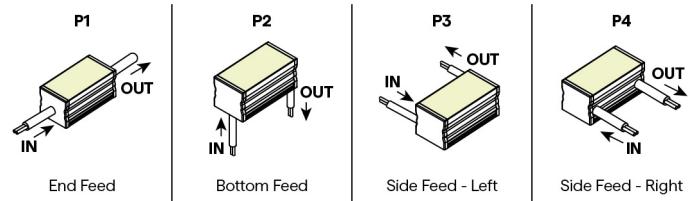


CONFIGURATION OPTIONS

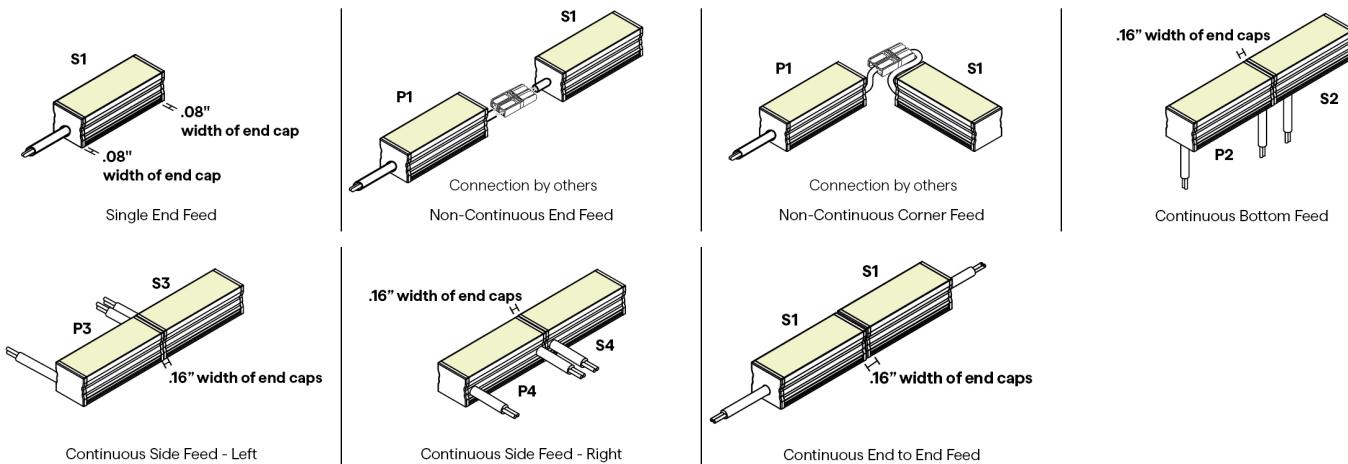

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



10 WIRE COLOR







ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


EXTERNAL LOUVER ACCESSORY

PLASTIC

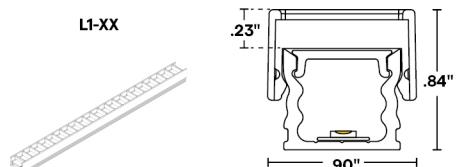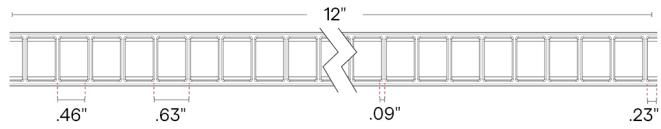

L1-XX


Profile with plastic louver



Lumen Multiplier
WH BK
0.71 0.53

To order separately use
TORQ-L1-FLAT-KIT-WH or
TORQ-L1-FLAT-KIT-BK

12 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'


To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head SS



Low Profile Magnet


One M4 provided per foot.
To order separately use
MG-04



Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04
Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



Magnet Clip

One MG provided per foot
To order separately use MG-01

13 FINISH



Satin

Black

Bronze

Custom finishes require a longer
lead time, consult factory

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

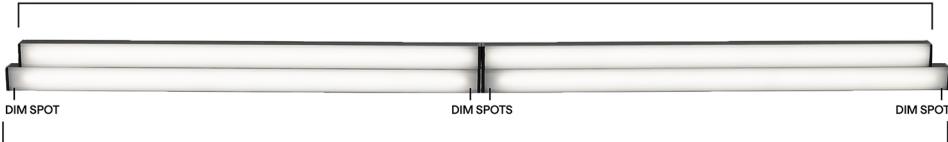

Exact Fixtures

DW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.51"	10.86"	10.41"	10.51"
13"	12.51"	12.86"	12.41"	12.51"
14"	12.51"	12.86"	12.41"	12.51"
15"	14.51"	14.86"	14.41"	14.51"
16"	14.51"	14.86"	14.41"	14.51"
17"	16.51"	16.86"	16.41"	16.51"
18"	16.51"	16.86"	16.41"	16.51"
19"	18.51"	18.86"	18.41"	18.51"
20"	18.51"	18.86"	18.41"	18.51"
21"	20.51"	20.86"	20.41"	20.51"
22"	20.51"	20.86"	20.41"	20.51"
23"	22.51"	22.86"	22.41"	22.51"
24"	22.51"	22.86"	22.41"	22.51"
36"	34.51"	34.86"	34.41"	34.51"
48"	46.51"	46.86"	46.41"	46.51"
60"	58.51"	58.86"	58.41"	58.51"
72"	70.51"	70.86"	70.41"	70.51"
84"	82.51"	82.86"	82.41"	82.51"
96"	94.51"	94.86"	94.41"	94.51"



ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle

DIMMING PROTOCOL	INDOOR
	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle



ESSENTIALS TORQ-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71"	HINGE - HMB-L  1.46" 1.29"	HINGE - HMB-XL  1.46" 4"	Q-PIVOT  .75" 1.03"	Q-ANGLE  1.38" 2.23"	VHB 	NJ-MEDIUM 	NJ-LARGE 	NU-LARGE 	SD-J-LARGE 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	Double sided mounting tape	J Mounting Bracket	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket
MMA-01  .75" .23"	MMA-04  .93" .19"								
Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04								