





# ESSENTIALS TORQ-OPTICS (02)

## WD APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

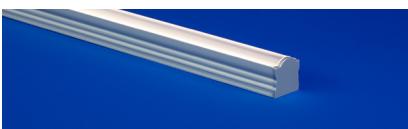

- Surface mount linear fixture for grazing
- Choose from a 12° or 40° beam angle
- Mounting tray available
- Features all wire feed options
- Ideal for direct and indirect applications
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled
- Optional plastic louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL

Sample Part Number: TQ2WD-6.0-19/30-DRY-WO-12-P1-BW-BK-CL2-SST-BK-48"-E

<b>1</b> <b>PRODUCT</b>  TQ2WD  LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  6.0 6.0W/ft  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE  1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE	<b>3</b> <b>CCT</b>  19/27 1900K/2700K 19/30 1900K/3000K  20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K  24/30 2400K/3000K	<b>4</b> <b>RATED</b>  DRY IP20  DRY IP20  DMP IP54	<b>5</b> <b>EFFICIENCY</b>  STD Standard WFO White Optics  WhiteOptics - Internal coating, greater lumen output	<b>6</b> <b>LENS</b>  12 Optical 12° 40 Optical 40° DRY or DMP only  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed S3 Single 3 (Input only) - Left Side Feed S4 Single 4 (Input only) - Right Side Feed  P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed P3 Pass Through 3 (Input/output) - Left Side Feed P4 Pass Through 4 (Input/output) - Right Side Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>WIRE COLOR</b>  WH White BK Black N/A For Barrel wet barrel only available in black		
<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	

For continuous mounting, consider bottom or side feed

BRL only available with TQ2WD  
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BRL only available with TQ2WD  
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


<b>11</b> <b>WIRE TYPE</b>  CL2 Class 2 CL2P Plenum Rated N/A For Barrel  CL2P only available with bare wire leads (BW)	<b>12</b> <b>MOUNTING</b>  SST Stainless Steel M4 Low Profile Magnet MG Magnet	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze CU Custom  Custom finishes require a longer lead time, consult factory	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.
--	---	---	---	---



# ESSENTIALS TORQ-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

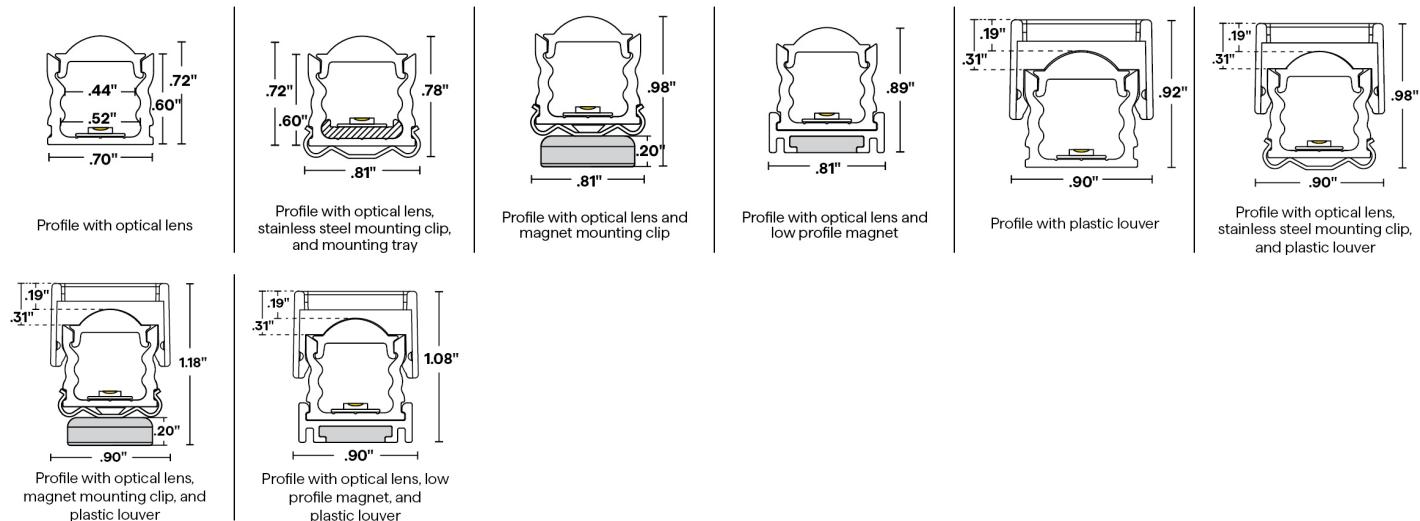

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with TQ2WD-6.0-30-DRY-STD

	3000K	
	LM/FT	CRI
12	382	97
40	489	97

[Calculated L70 = 70000 hrs]  
Tested with TQ2DW-\*\*-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
12	128	98	202	98	315	98
40	160	98	253	98	394	98

[Calculated L70 = 70000 hrs]  
Tested with TQ2WD-6.0-30-DRY-WO

	3000K	
	LM/FT	CRI
12	395	97
40	495	97

[Calculated L70 = 70000 hrs]  
Tested with TQ2DW-\*\*-30-DRY-WO

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
12	134	98	211	98	328	98
40	167	98	264	98	411	98


## 6 DIODE VISIBILITY



Optical lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





## ESSENTIALS TORQ-OPTICS (02) WD APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

### TEMPERATURE RATINGS


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
WD 6.0 W/FT		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	120°F	-4°F	145°F	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	130°F
DMP	Ambient Operating Temp - Surface	**	**	-4°F	140°F	-4°F	130°F	-4°F	135°F	-4°F	115°F	**	**

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)

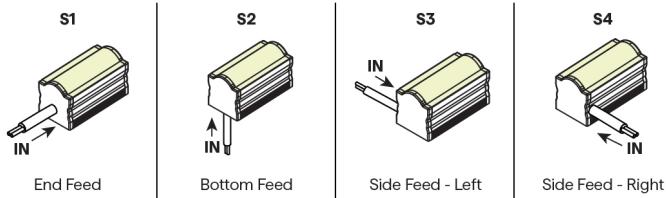


PASS THROUGH (Input/Output)

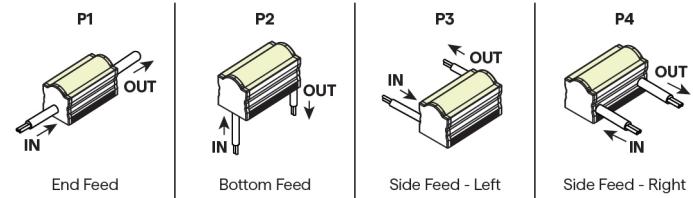


### CONFIGURATION OPTIONS




Single End Feed




Non-Continuous End Feed




Non-Continuous Corner Feed




Continuous Bottom Feed



Continuous Side Feed - Left








Continuous Side Feed - Right



Continuous End to End Feed

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



### 10 WIRE COLOR





## ESSENTIALS TORQ-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### EXTERNAL LOUVER ACCESSORY


When using 40DEG option with a side feed input/output, routing will be necessary on the plastic louver to ensure unobstructed wire exits.

#### PLASTIC

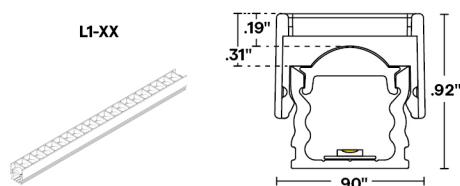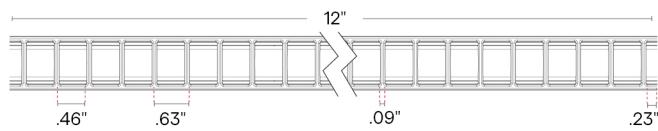

L1-XX

Lumen Multiplier  
WH BK



Profile with plastic louver


To order separately use  
TORQ-L1-OPTICS-KIT-WH or  
TORQ-L1-OPTICS-KIT-BK

0.74

0.57

### 12 MOUNTING

SST




Stainless Steel Clip

2 clips provided for 4' or less; 4  
clips provided for greater than  
4'

To order separately use SST-01

Each clip comes with a #4 x  
5/8" Flat Head SS

M4




Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04

MMA-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6  
x 5/8" Flat Head SS

MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6  
x 5/8" Flat Head SS

Required when mounting to a  
non-magnetic surface

### 13 FINISH



Satin

Black

Bronze

Custom finishes require a longer  
lead time, consult factory



## ESSENTIALS TORQ-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

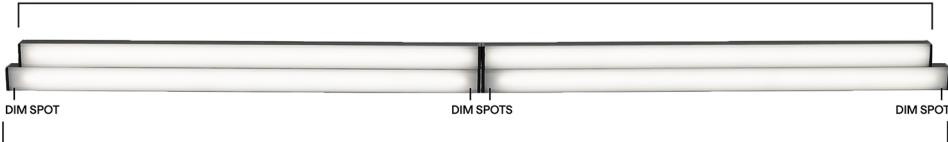

Exact Fixtures

### WD DRY LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.41"	10.66"	10.26"	10.36"
13"	12.41"	12.66"	12.26"	12.36"
14"	12.41"	12.66"	12.26"	12.36"
15"	14.41"	14.66"	14.26"	14.36"
16"	14.41"	14.66"	14.26"	14.36"
17"	16.41"	16.66"	16.26"	16.36"
18"	16.41"	16.66"	16.26"	16.36"
19"	18.41"	18.66"	18.26"	18.36"
20"	18.41"	18.66"	18.26"	18.36"
21"	20.41"	20.66"	20.26"	20.36"
22"	20.41"	20.66"	20.26"	20.36"
23"	22.41"	22.66"	22.26"	22.36"
24"	22.41"	22.66"	22.26"	22.36"
36"	34.41"	34.66"	34.26"	34.36"
48"	46.41"	46.66"	46.26"	46.36"
60"	58.41"	58.66"	58.26"	58.36"
72"	70.41"	70.66"	70.26"	70.36"
84"	82.41"	82.66"	82.26"	82.36"
96"	94.41"	94.66"	94.26"	94.36"



# ESSENTIALS TORQ-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2		S3 & S4		P3 & P4	
	S1	S2	P1	P2	S3	S4	P3	P4
12"	10.51"		10.86"		10.41"		10.51"	
13"	12.51"		12.86"		12.41"		12.51"	
14"	12.51"		12.86"		12.41"		12.51"	
15"	14.51"		14.86"		14.41"		14.51"	
16"	14.51"		14.86"		14.41"		14.51"	
17"	16.51"		16.86"		16.41"		16.51"	
18"	16.51"		16.86"		16.41"		16.51"	
19"	18.51"		18.86"		18.41"		18.51"	
20"	18.51"		18.86"		18.41"		18.51"	
21"	20.51"		20.86"		20.41"		20.51"	
22"	20.51"		20.86"		20.41"		20.51"	
23"	22.51"		22.86"		22.41"		22.51"	
24"	22.51"		22.86"		22.41"		22.51"	
36"	34.51"		34.86"		34.41"		34.51"	
48"	46.51"		46.86"		46.41"		46.51"	
60"	58.51"		58.86"		58.41"		58.51"	
72"	70.51"		70.86"		70.41"		70.51"	
84"	82.51"		82.86"		82.41"		82.51"	
96"	94.51"		94.86"		94.41"		94.51"	

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle



# ESSENTIALS TORQ-OPTICS (02) WD APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL		INDOOR	
		DW-HE Warm Dim Applications	WD
Phase	QZ-DW		QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW		QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN		QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System			QTM-eLED(E)
DMX If using DW LED, wattage must be doubled			QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6		QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle		Non-Dim Power Supply with SW App Dongle

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b> 1.41" .71"	<b>HINGE - HMB-L</b> 1.46" 1.29"	<b>HINGE - HMB-XL</b> 1.46" 4"	<b>Q-PIVOT</b> 75" 1.03"	<b>Q-ANGLE</b> 1.38" 2.23"	<b>VHB</b> Double sided mounting tape	<b>NU-GRAZER</b> U Mounting Bracket	<b>NJ-GRAZER</b> J Mounting Bracket	<b>BL-GRAZER</b> Backwards L Mounting Bracket	<b>NJ-MEDIUM</b> J Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory					
<b>MMA-01</b> .23" .75"	<b>MMA-04</b> .19" .93"								
Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04								