





ESSENTIALS TRE3-FLAT (01)

RGBW

24VDC Linear Fixtures - Surface

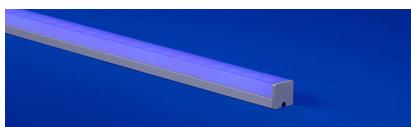

- Linear fixture designed for surface mount and grid ceiling applications
- Diffused lens
- Three-sided illumination
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
TR1RGBW				STD	DF									

Sample Part Number: TR1RGBW-6.0-30-DRY-STD-DF-P1-BW-BW-BK-CL2-HSS-ST-48"-E


1 PRODUCT TR1RGBW See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft 4.0HE 4.0W/ft HE	3 CCT 27 RGBW-2700K 30 RGBW-3000K 27 RGBW-2700K 30 RGBW-3000K 35 RGBW-3500K 40 RGBW-4000K	4 RATED DRY IP20 DMP IP54	5 EFFICIENCY STD Standard	6 LENS DF Diffused For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	8 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	10 WIRE COLOR WH White BK Black		
					BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
					BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING HSS Hidden Stainless Steel Clip TBC-01 9/16" Flat or Tegular TB-Grid TBC-02 15/16" Flat or Tegular TB-Grid	13 FINISH ST Satin CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



ESSENTIALS TRE3-FLAT (01) RGBW

24VDC Linear Fixtures - Surface

1 PRODUCT - DIMENSIONS

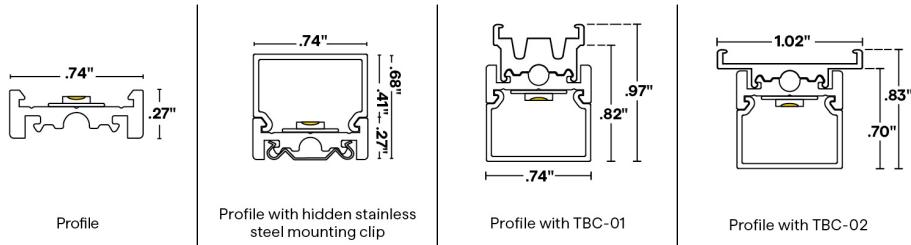

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with TR1RGBW-**-30-DRY-STD

	6.0 W/FT								4.0 HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
DF	34	631	90	513	27	464	115	93	29	629	112	516	24	465	69	97


6 DIODE VISIBILITY



DF - Diffused lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Diffused 136°

TEMPERATURE RATINGS

		6.0 W/FT		4.0 HE W/FT	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	120°F




ESSENTIALS TRE3-FLAT (01) RGBW


24VDC Linear Fixtures - Surface

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

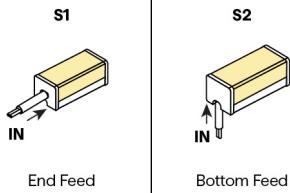


PASS THROUGH (Input/Output)

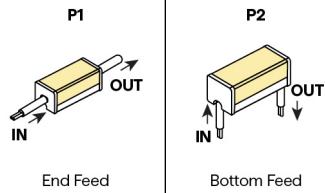


CONFIGURATION OPTIONS

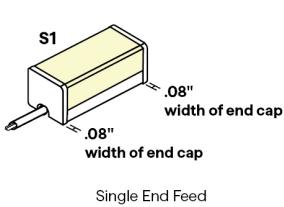


Single End Feed

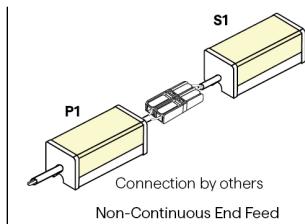


Non-Continuous End Feed

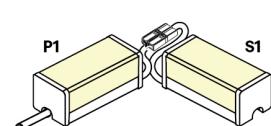

Non-Continuous Corner Feed




Continuous Bottom Feed

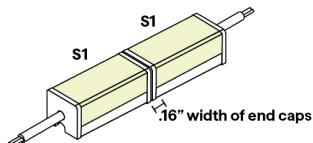


Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

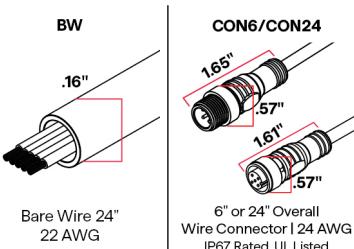

10 WIRE COLOR



White

Black



ESSENTIALS TRE3-FLAT (01) RGBW

24VDC Linear Fixtures - Surface

12 MOUNTING

HSS
Hidden Stainless Steel Clip
2 clips provided for 4' or less. 4 clips provided for greater than 4'.
To order separately use SST-02
Each clip comes with a #4 x 5/8" Flat Head SS

TBC-01
Plastic T-Bar Clip
Use on 9/16" Flat or Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.
To order separately use TBC-01
Each pair of clips comes with M2.5 x 4mm

TBC-02
Plastic T-Bar Clip
Use on 15/16" Flat or Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.
To order separately use TBC-02

13 FINISH




Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

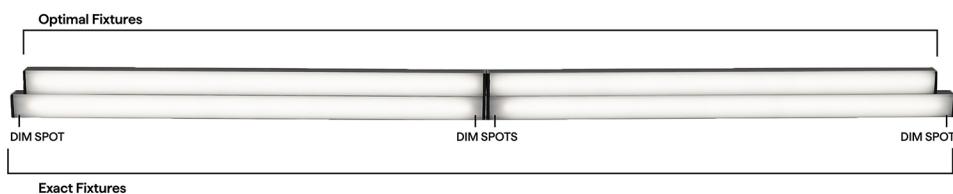



ESSENTIALS TRE3-FLAT (01) RGBW

24VDC Linear Fixtures - Surface

RGBW-HE DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

RGBW DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	8.51"		8.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	12.51"		12.86"	
16"	12.51"		12.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	16.51"		16.86"	
20"	16.51"		16.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	20.51"		20.86"	
24"	20.51"		20.86"	
36"	32.51"		32.86"	
48"	44.51"		44.86"	
60"	56.51"		56.86"	
72"	68.51"		68.86"	
84"	80.51"		80.86"	
96"	92.51"		92.86"	



ESSENTIALS TRE3-FLAT (01) RGBW

24VDC Linear Fixtures - Surface

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.


DIM TO LEVEL	INDOOR
	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle

DIMMING PROTOCOL	INDOOR
	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle

COMPATIBLE MOUNTING ACCESSORIES



COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity



ESSENTIALS TRE3-FLAT (01) RGBW

24VDC Linear Fixtures - Surface

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage