



# ESSENTIALS VEVE™-FLAT (01)

## WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface



- Corner and surface mount linear fixture with flat lens
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Two cutoff options when using clear lens
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
	STD													

Sample Part Number: VV1WD-6.0-19/30-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


<b>1 PRODUCT</b>  <b>VV1WD</b>  LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	<b>2 WATTS/FT</b>  6.0 6.0W/ft	<b>3 CCT</b>  19/27 1900K/2700K 19/30 1900K/3000K	<b>4 RATED</b>  DRY IP20	<b>5 EFFICIENCY</b>  STD Standard	<b>6 LENS</b>  DF Diffused PR Polar FR Frosted CL Clear  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>VV1DW</b> <b>VV1DW-USA</b>  Select USA option for BAA and BABA projects. Only DRY ratings apply.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K	<b>DRY</b> IP20		
	<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>DMP</b> IP54		
<b>7 WIRE INPUT/OUTPUT</b>  <b>S1</b> Single 1 (Input only) - End Feed	<b>8 CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>9 CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10 WIRE COLOR</b>  WH White BK Black N/A For Barrel  wet barrel only available in black		
<b>P1</b> Pass Through 1 (Input/output) - End Feed	<b>BW</b> Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"	<b>BW</b> Bare Wire (Standard 24") BRL Barrel CON6 Connector 6" CON24 Connector 24"			
			 BRL only available with VV1WD. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		
			 BRL only available with VV1WD. BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		
<b>11 WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated <b>N/A</b> For Barrel  CL2P only available with bare wire leads (BW)	<b>12 MOUNTING</b>  <b>SST</b> Stainless Steel <b>M4</b> Low Profile Magnet <b>MG</b> Magnet	<b>13 FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>BZ</b> Bronze <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory	<b>14 LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15 EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



# ESSENTIALS VEVE™-FLAT (01) WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

## 1 PRODUCT - DIMENSIONS

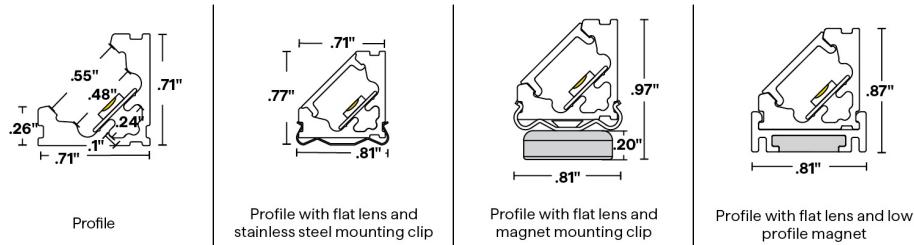

## 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
Tested with VV1WD-6.0-30-DRY-STD

	3000K	
	LM/FT	CRI
CL	438	97
FR	427	97
PR	403	97
DF	356	97

[Calculated L70 = 70000 hrs]  
Tested with VV1DW-\*\*-30-DRY-STD

	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
CL	140	98	221	98
FR	138	98	217	98
PR	126	98	198	98
DF	115	98	181	98


## 6 DIODE VISIBILITY

## PHOTOMETRIC PERFORMANCE



DF - Diffused lens  
PR - Polar lens  
FR - Frosted lens  
CL - Clear lens

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 100°

## TEMPERATURE RATINGS

		WD 1.5 HE W/FT		WD 3.0 HE W/FT		WD 2.5 HE W/FT		WD 5.0 HE W/FT	
		WD 6.0 W/FT		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	120°F	-4	145	-4	130	-4	140
DMP	Ambient Operating Temp - Surface	**	**	-4	140	-4	125	-4	135
WET	Ambient Operating Temp - Surface	**	**	**	**	**	**	**	**




## ESSENTIALS VEVE™-FLAT (01) WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface


### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


### CONFIGURATION OPTIONS




Single End Feed



Non-Continuous End Feed







Non-Continuous Corner Feed

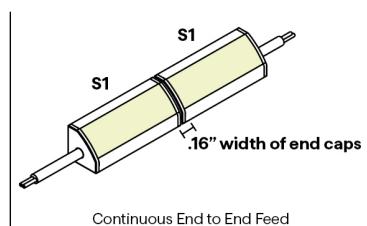

Continuous End to End Feed

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out



White





Black



## ESSENTIALS VEVE™-FLAT (01) WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

### 12 MOUNTING

SST	M4	MMA-04	MG
 Stainless Steel Clip 2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	 Low Profile Magnet One M4 provided per foot. To order separately use MG-04	 Magnet Mount Accessory for M4 Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	 Magnet Clip One MG provided per foot To order separately use MG-01

### 13 FINISH



Custom finishes require a longer lead time, consult factory

### MMA-01


 Magnet Mount Accessory of MG-01 Sold separately, to order use MMA-01 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface
--

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

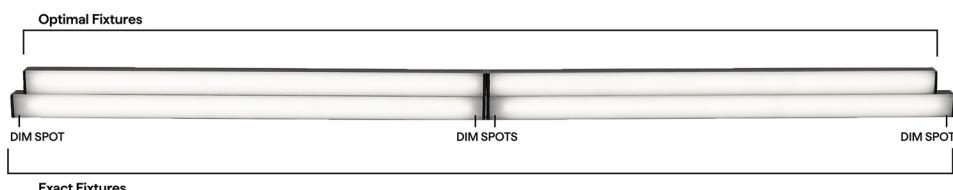



# ESSENTIALS VEVE™-FLAT (01) WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

## WD DRY LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	S1	P1
12"	11.59"	11.34"
13"	12.59"	12.34"
14"	13.59"	13.34"
15"	14.59"	14.34"
16"	15.59"	15.34"
17"	16.59"	16.34"
18"	17.59"	17.34"
19"	18.59"	18.34"
20"	19.59"	19.34"
21"	20.59"	20.34"
22"	21.59"	21.34"
23"	22.59"	22.34"
24"	23.59"	23.34"
36"	35.59"	35.34"
48"	47.59"	47.34"
60"	59.59"	59.34"
72"	71.59"	71.34"
84"	83.59"	83.34"
96"	95.59"	95.34"

## DW-HE DRY DMP LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	S1	P1
12"	11.49"	11.14"
13"	12.49"	12.14"
14"	13.49"	13.14"
15"	14.49"	14.14"
16"	15.49"	15.14"
17"	16.49"	16.14"
18"	17.49"	17.14"
19"	18.49"	18.14"
20"	19.49"	19.14"
21"	20.49"	20.14"
22"	21.49"	21.14"
23"	22.49"	22.14"
24"	23.49"	23.14"
36"	35.49"	35.14"
48"	47.49"	47.14"
60"	59.49"	59.14"
72"	71.49"	71.14"
84"	83.49"	83.14"
96"	95.49"	95.14"



# ESSENTIALS VEVE™-FLAT (01) WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle

DIMMING PROTOCOL	INDOOR	
	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System		QTM-eLED(E)
DMX If using DW LED, wattage must be doubled		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle



## ESSENTIALS VEVE™-FLAT (01) WD APPLICATIONS

24VDC Linear Fixtures - Corner & Surface

### COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71"	<b>HINGE - HMB-L</b>  1.46" 1.29"	<b>HINGE - HMB-XL</b>  1.46" 4"	<b>Q-PIVOT</b>  .75" 1.03"	<b>Q-ANGLE</b>  1.38" 2.23"	<b>QUOVA-STANDARD</b> 	<b>NJ-LARGE</b> 	<b>NJ-MEDIUM</b> 	<b>SD-J-LARGE</b> 	<b>BL-LARGE</b> 
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	J Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket
<b>NL-LARGE</b> 	<b>SD-L-LARGE</b> 	<b>SD-L-MEDIUM</b> 	<b>MMA-01</b>  1.23" .75"	<b>MMA-04</b>  1.19" .93"	Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04			
L Mounting Bracket	L Mounting Bracket	L Mounting Bracket							