



ESSENTIALS VEVE™-FLAT (01)

RGB

24VDC Linear Fixtures - Corner & Surface



- Corner and surface mount linear fixture with flat lens
- Choose from diffused, polar, frosted, or clear lens options for varying diode visibility and beam angles
- Two cutoff options when using clear lens
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Red, Green, and Blue LEDs allow for color changing applications
- Features 7 diodes per 2" cut point

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL
VV1RGB	6.0	RGB		STD										

Sample Part Number: VV1RGB-6.0-RGB-DRY-STD-DF-P1-BW-BW-BK-CL2-SST-BK-48"-E


1 PRODUCT VV1RGB See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT RGB	4 RATED DRY IP20 DMP IP54	5 EFFICIENCY STD Standard	6 LENS DF Diffused PR Polar FR Frosted CL Clear For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed P1 Pass Through 1 (Input/output) - End Feed	8 CONNECTOR/WIRE IN BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	10 WIRE COLOR WH White BK Black		
					BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
					BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	13 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length	Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.



ESSENTIALS VEVE™-FLAT (01) RGB

24VDC Linear Fixtures - Corner & Surface

1 PRODUCT - DIMENSIONS

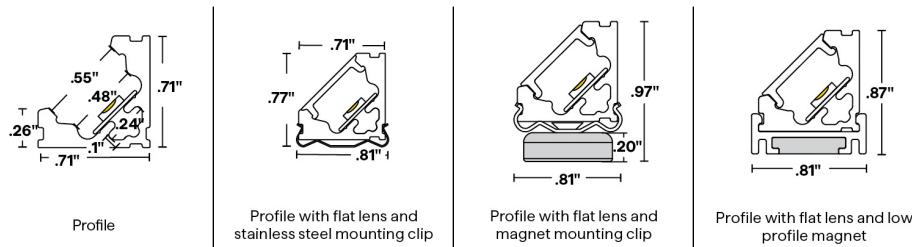

2 DELIVERED LUMENS

[Calculated L70 = 55000 hrs]
Tested with VVIRGB-6.0-RGB-DRY-STD

	Red		Green		Blue		ALL
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	79	633	159	523	45	469	255
FR	77	633	156	523	44	469	251
PR	71	633	143	523	40	469	229
DF	64	633	130	523	37	469	209


6 DIODE VISIBILITY



DF - Diffused lens
PR - Polar lens
FR - Frosted lens
CL - Clear lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



Clear 100°

TEMPERATURE RATINGS

		6.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	105°F
DMP	Ambient Operating Temp - Surface	-13°F	100°F
WET	Ambient Operating Temp - Surface	**	**




ESSENTIALS VEVE™-FLAT (01) RGB

24VDC Linear Fixtures - Corner & Surface


7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed

PASS THROUGH (Input/Output)




End Feed


CONFIGURATION OPTIONS

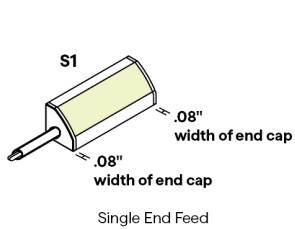


Single End Feed

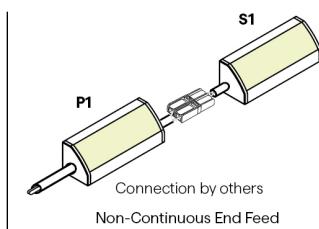

Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous Corner Feed

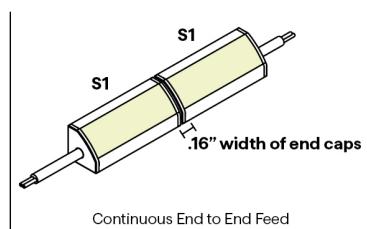

Continuous End to End Feed

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

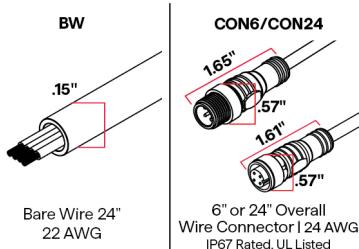

White

Black

10 WIRE COLOR



ESSENTIALS VEVE™-FLAT (01) RGB

24VDC Linear Fixtures - Corner & Surface

12 MOUNTING

SST	M4	MMA-04	MG
Satin Steel Clip	Low Profile Magnet	Magnet Mount Accessory for M4	Magnet Clip
2 clips provided for 4' or less; 4 clips provided for greater than 4' To order separately use SST-01 Each clip comes with a #4 x 5/8" Flat Head SS	One M4 provided per foot. To order separately use MG-04	Sold separately, to order use MMA-04 Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface	One MG provided per foot To order separately use MG-01

13 FINISH



Custom finishes require a longer lead time, consult factory

MMA-01


Magnet Mount Accessory of MG-01
Sold separately, to order use MMA-01
Each bracket comes with 2 #6 x 5/8" Flat Head SS Required when mounting to a non-magnetic surface

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

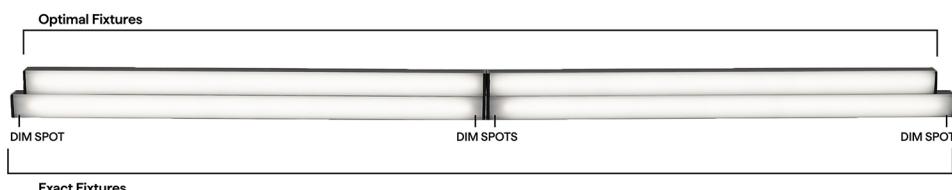



ESSENTIALS VEVE™-FLAT (01) RGB

24VDC Linear Fixtures - Corner & Surface

RGB DRY DMP LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture	
	S1	End Feed
12"	1"	
13"	0.5"	
14"	1"	
15"	0.5"	
16"	1"	
17"	0.5"	
18"	1"	
19"	0.5"	
20"	1"	
21"	0.5"	
22"	1"	
23"	0.5"	
24"	1"	
36"	1"	
48"	1"	
60"	1"	
72"	1"	
84"	1"	
96"	1"	

OPTIMAL LENGTH

Requested Nominal Length	S1	P1
	IN	OUT
12"	11.49"	11.14"
13"	12.49"	12.14"
14"	13.49"	13.14"
15"	14.49"	14.14"
16"	15.49"	15.14"
17"	16.49"	16.14"
18"	17.49"	17.14"
19"	18.49"	18.14"
20"	19.49"	19.14"
21"	20.49"	20.14"
22"	21.49"	21.14"
23"	22.49"	22.14"
24"	23.49"	23.14"
36"	35.49"	35.14"
48"	47.49"	47.14"
60"	59.49"	59.14"
72"	71.49"	71.14"
84"	83.49"	83.14"
96"	95.49"	95.14"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle

DIMMING PROTOCOL	INDOOR
	RGB
DMX	QTM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8



ESSENTIALS VEVE™-FLAT (01) RGB

24VDC Linear Fixtures - Corner & Surface

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" 0.71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46" 4"	Q-PIVOT 0.75" 1.03"	Q-ANGLE 1.38" 2.23"	QUOVA-STANDARD 	NJ-LARGE 	NJ-MEDIUM 	SD-J-LARGE 	BL-LARGE
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	J Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket
NL-LARGE 	SD-L-LARGE 	SD-L-MEDIUM 	MMA-01 0.23" 0.75"	MMA-04 1.19" 0.93"	Magnet Mount Accessory of MG-01	Magnet Mount Accessory of MG-04			
L Mounting Bracket	L Mounting Bracket	L Mounting Bracket							

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage