





ESSENTIALS LATO- ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

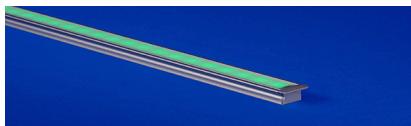

- Shallow flanged recessed fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Flanged design merges light source with surface
- Stainless steel mounting clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2" cut point

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/OPTIMAL
LT3RGB	6.0	RGB	ENC						STD	STD			SST			

Sample Part Number: LT3RGB-6.0-RGB-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-ST-48"-E


1 PRODUCT LT3RGB See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT RGB	4 RATED ENC IP67	5 EFFICIENCY STD WO Standard White Optics WhiteOptics - Internal coating, greater lumen output	6 LENS CL TL Clear Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed	8 CONNECTOR/WIRE IN ▶ BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	9 CONNECTOR/WIRE OUT ▶ CLS Closed End (No feed)			
P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	▶ BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"	▶ BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24"			
For continuous mounting, consider bottom feed	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
10 INPUT END CAP STD Standard STD - End cap matches fixture finish chosen	11 OUTPUT END CAP STD Standard STD - End cap matches fixture finish chosen	12 WIRE COLOR WH White BK Black	13 WIRE TYPE CL2 CL2P Class 2 Plenum Rated CL2P only available with bare wire leads (BW)		
14 MOUNTING SST Stainless Steel	15 FINISH ST Satin BK Black BZ Bronze CU Custom Custom finishes require a longer lead time, consult factory	16 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	17 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		



ESSENTIALS LATO-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

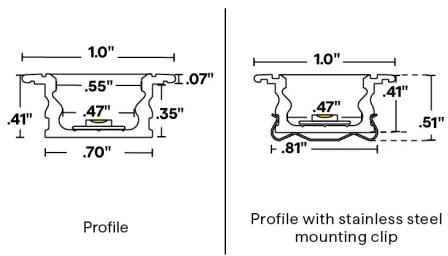

Profile with stainless steel mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LT3RGB-6.0-RGB-ENC-STD

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	56	633	113	523	32	469	182
TL	30	633	60	523	17	469	96

[Calculated L70 = 40000 hrs]
Tested with LT3RGB-6.0-RGB-ENC-WO

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	77	632	155	521	44	469	191
TL	49	632	100	521	28	469	101

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS


	6.0 W/FT	
	Min	Max
Ambient Operating Temp - Recessed	-13°F	90°F
Ambient Operating Temp - Surface	**	**

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

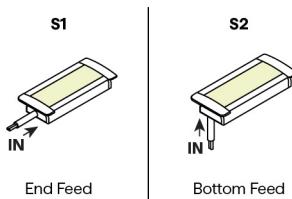

PASS THROUGH (Input/Output)

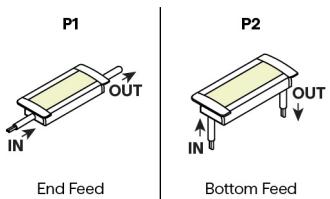




ESSENTIALS LATO-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Recessed

CONFIGURATION OPTIONS

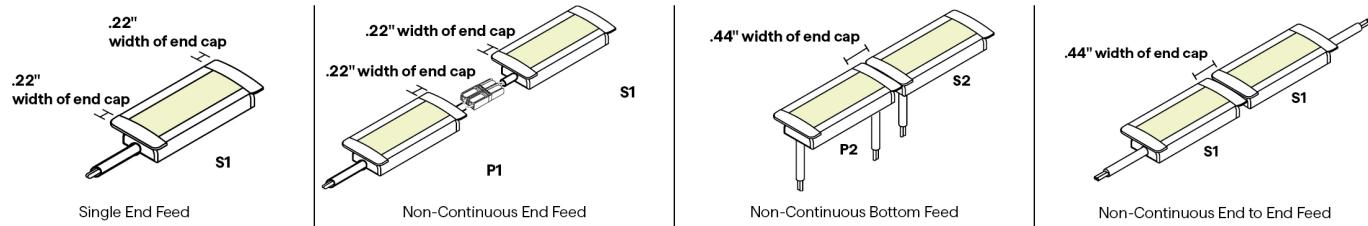


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

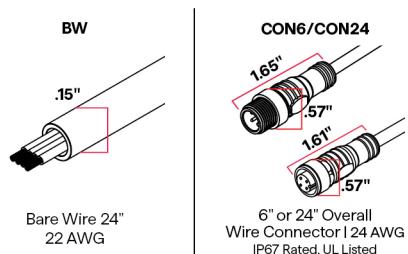


12 WIRE COLOR



White
Black

14 MOUNTING




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head screw

15 FINISH



Satin
Black
Bronze

Custom finishes require
a longer lead time,
consult factory

17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



ESSENTIALS LATO-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

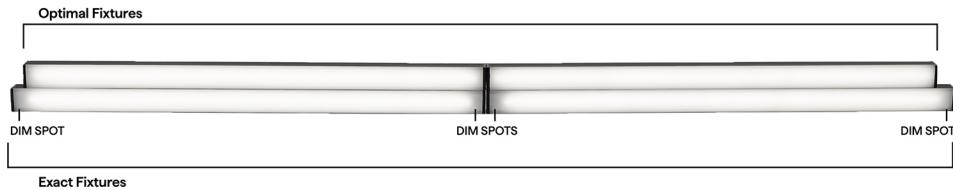

RGB ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	RGB		RGB	
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX			Q-SET+QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8			Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle			



ESSENTIALS LATO-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8

COMPATIBLE MOUNTING ACCESSORIES




COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

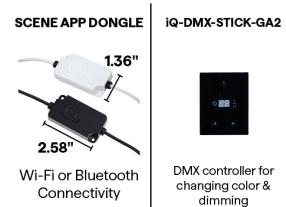

COMPATIBLE APPS



Read and write DMX addresses and adjust voltage