




# ESSENTIALS TALO- ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
			ENC	STD	

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/OPTIMAL
				STD	STD					

Sample Part Number: TO3DW-6.0-24/30-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-HSS-ST-48"-E

<b>1</b> <b>PRODUCT</b>  <b>TO3DW</b> <b>TO3DW-USA</b>  Select USA option for BAA and BABA products.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  <b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>3</b> <b>CCT</b>  <b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>4</b> <b>RATED</b>  <b>ENC</b> IP67	<b>5</b> <b>EFFICIENCY</b>  <b>STD</b> Standard	<b>6</b> <b>LENS</b>  <b>CL</b> Clear <b>TL</b> Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed  For continuous mounting, consider bottom feed  When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>8</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)			
<b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed  For continuous mounting, consider bottom feed  When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
<b>10</b> <b>INPUT END CAP</b>  <b>STD</b> Standard  STD - End cap matches fixture finish chosen	<b>11</b> <b>OUTPUT END CAP</b>  <b>STD</b> Standard  STD - End cap matches fixture finish chosen	<b>12</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black	<b>13</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)		
<b>14</b> <b>MOUNTING</b>  <b>HSS</b> Hidden Stainless Steel Clip <b>TBC-01</b> 9/16" Flat or Tegular TB-Grid <b>TBC-02</b> 15/16" Flat or Tegular TB-Grid	<b>15</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory	<b>16</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17</b> <b>EXACT/OPTIMAL</b>  <b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | IK10 rated



# ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface

### 1 PRODUCT - DIMENSIONS

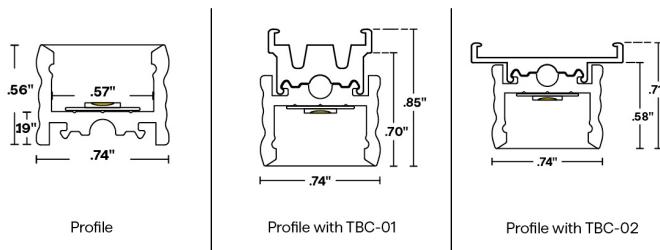

### 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with TO3DW-\*\*-30-ENC-STD

	1.5HE W/FT	2.5HE W/FT
LM/FT	CRI	LM/FT
CL	110	174
TL	57	90

### 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

### TEMPERATURE RATINGS


Ambient Operating Temp - Surface	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT			
	QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply	QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	-4°F	105°F

### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)

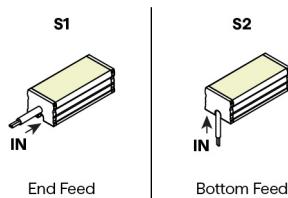

PASS THROUGH (Input/Output)

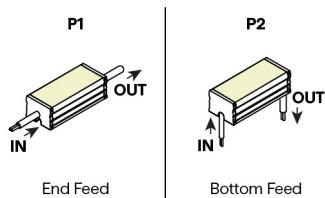




# ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS


## 24VDC Linear Fixtures - Surface

### CONFIGURATION OPTIONS

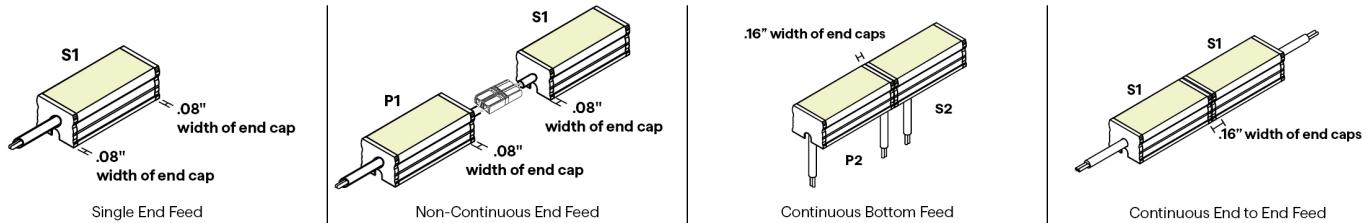

### 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

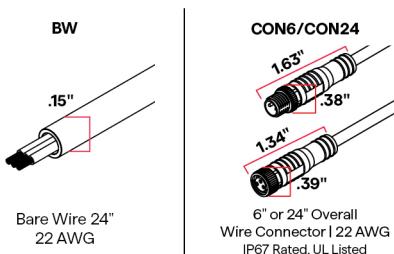


### 12 WIRE COLOR



White  
Black

### 14 MOUNTING




Hidden Stainless Steel Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SST-02

Each clip comes with a #4 x 5/8 Flat Head SS



Plastic T-Bar Clip

Use on 9/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-01

Each pair of clips comes with M2.5 x 4mm set screw and Allen key



Plastic T-Bar Clip

Use on 15/16" Flat or Tegular Drop Ceiling

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length

To order separately use TBC-02

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### 15 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory



# ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface


## 17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

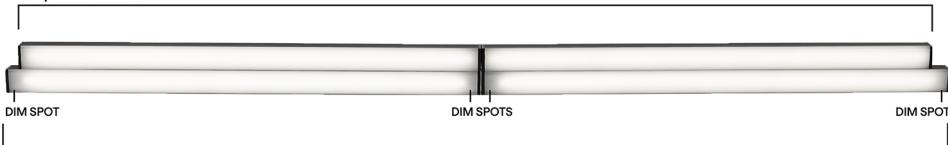

Exact Fixtures

## DW-HE ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $+0 - 1/8"$ . Consult factory for lengths under 12".

### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.51"	12.51"	10.86"	
13"	12.51"	12.86"		
14"	12.51"	12.86"		
15"	14.51"	14.86"		
16"	14.51"	14.86"		
17"	16.51"	16.86"		
18"	16.51"	16.86"		
19"	18.51"	18.86"		
20"	18.51"	18.86"		
21"	20.51"	20.86"		
22"	20.51"	20.86"		
23"	22.51"	22.86"		
24"	22.51"	22.86"		
36"	34.51"	34.86"		
48"	46.51"	46.86"		
60"	58.51"	58.86"		
72"	70.51"	70.86"		
84"	82.51"	82.86"		
96"	94.51"	94.86"		

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has  $\pm 5\%$  tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



# ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE

## APPLICATIONS

24VDC Linear Fixtures - Surface

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES



## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES



Wi-Fi or Bluetooth Connectivity



# ESSENTIALS TALO-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface

---

## COMPATIBLE APPS

### NFC APP



Read and write  
DMX addresses and  
adjust voltage