



ESSENTIALS TORQ- ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed



white
optics



RoHS
COMPLIANT

5 YEAR
WARRANTY

Declare.

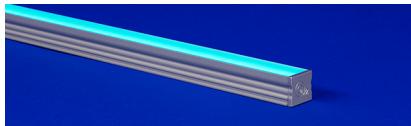

- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, and Blue LED allows for color changing applications
- Features 7 diodes per 2' cut point
- Optional plastic louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 EFFICIENCY	6 LENS
TQ3RGB	6.0	RGB	ENC		

ADDITIONAL INFORMATION REQUIRED TO ORDER

7 WIRE INPUT/OUTPUT	8 CONNECTOR / WIRE IN	9 CONNECTOR / WIRE OUT	10 INPUT END CAP	11 OUTPUT END CAP	12 WIRE COLOR	13 WIRE TYPE	14 MOUNTING	15 FINISH	16 LENGTH (IN)	17 EXACT/ OPTIMAL

Sample Part Number: TQ3RGB-6.0-RGB-ENC-WO-TL-P1-BW-BW-STD-STD-BK-CL2-SST-BK-48"-E

1 PRODUCT TQ3RGB See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft	3 CCT RGB	4 RATED ENC IP67	5 EFFICIENCY STD Standard White Optics WO WhiteOptics - Internal coating, greater lumen output	6 LENS CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages
7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed For continuous mounting, consider bottom or side feed	8 CONNECTOR/WIRE IN BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	9 CONNECTOR/WIRE OUT CLS Closed End (No feed)			
PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed P3 Left Side Feed P4 Right Side Feed For continuous mounting, consider bottom or side feed	BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW CON6 CON24 Bare Wire (Standard 24") Connector 6" Connector 24" BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
10 INPUT END CAP STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	11 OUTPUT END CAP STD Standard CL Clear STD - End cap matches fixture finish chosen Select CL for continuous runs	12 WIRE COLOR WH White BK Black	13 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)		
14 MOUNTING SST Stainless Steel M4 Low Profile Magnet MG Magnet	15 FINISH ST Satin BK Black BZ Bronze CU Custom	16 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	17 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.		


5 year warranty | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Compatible for use with QTL power supplies | IK10 rated



ESSENTIALS TORQ-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

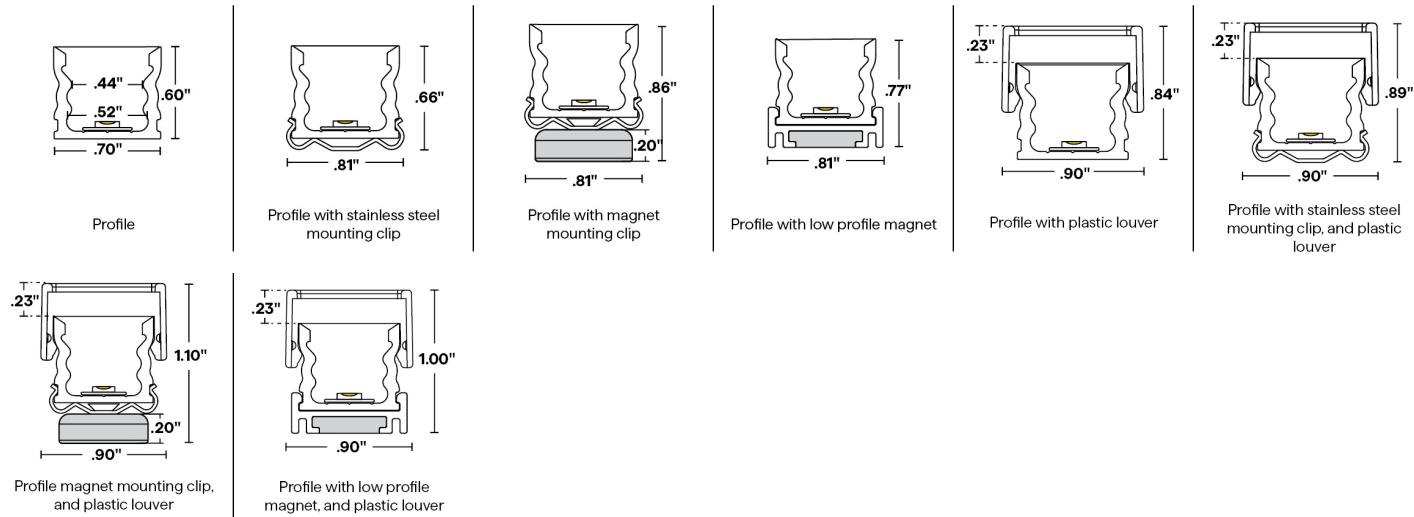

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with TQ3RGB-6.0-RGB-ENC-STD

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	54	633	109	523	31	469	174
TL	45	633	91	523	26	469	147

[Calculated L70 = 40000 hrs]
Tested with TQ3RGB-6.0-RGB-ENC-WO

	Red		Green		Blue		All
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	
CL	58	633	117	523	33	469	188
TL	51	633	103	523	29	469	165

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation

TEMPERATURE RATINGS

	6.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-13°F	95°F




ESSENTIALS TORQ-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

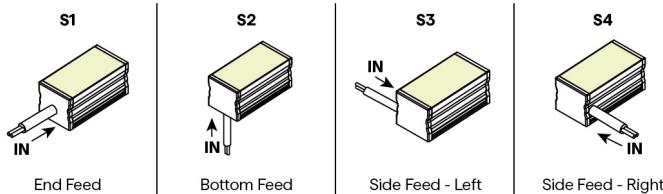

PASS THROUGH (Input/Output)

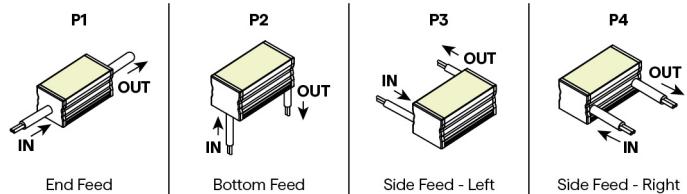


CONFIGURATION OPTIONS

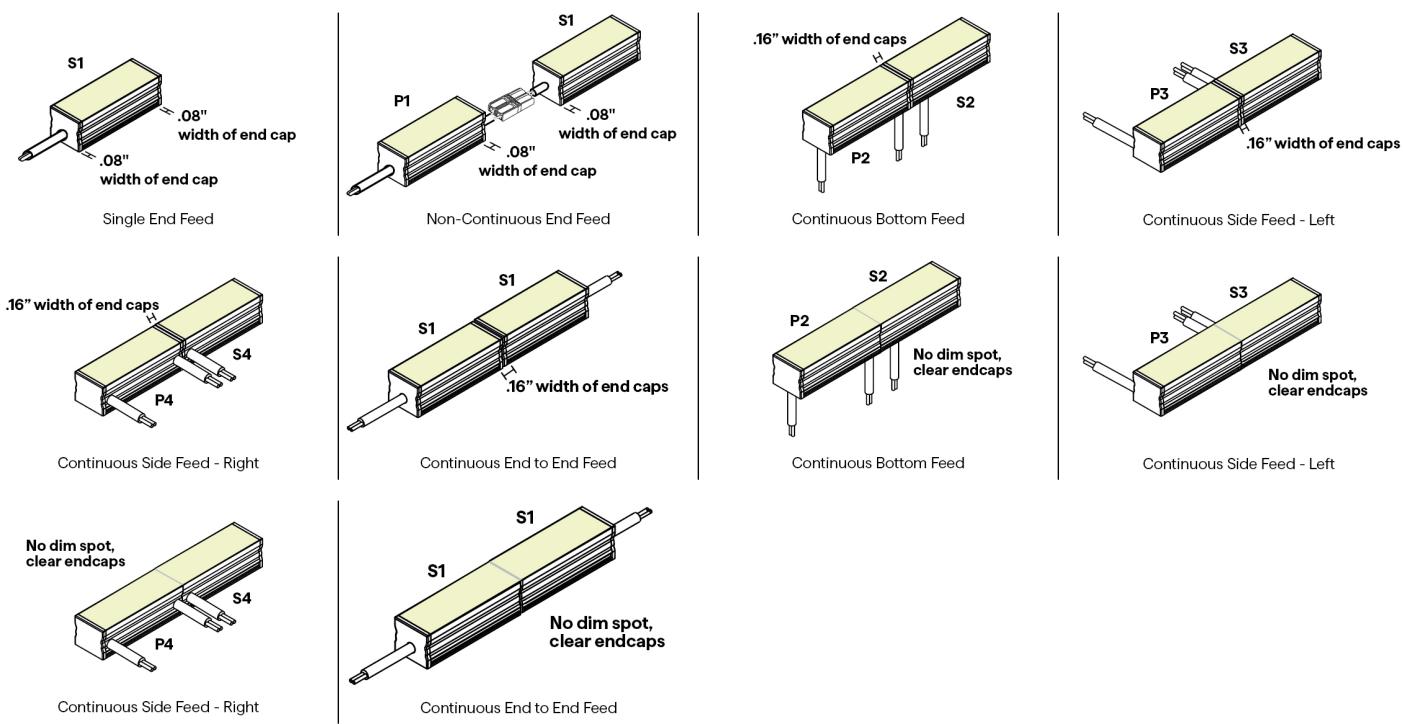


8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

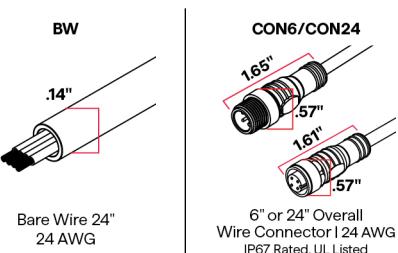

10 / 11 END CAP – IN/OUT

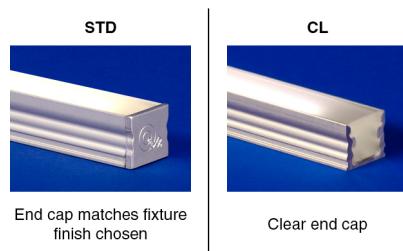





ESSENTIALS TORQ-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

EXTERNAL LOUVER ACCESSORY

PLASTIC

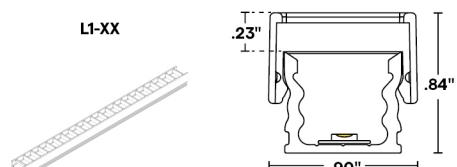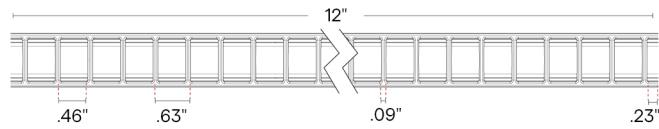

Lumen Multiplier
WH BK

0.70 0.49


Profile with plastic louver

To order separately use
TORQ-L1-FLAT-KIT-WH or
TORQ-L1-FLAT-KIT-BK

12 WIRE COLOR



White
Black




Stainless Steel Clip

2 clips provided for 4' or less; 4
clips provided for greater than
4'

To order separately use SST-01

Each clip comes with a #4 x
5/8" Flat Head screw

14 MOUNTING




M4

Low Profile Magnet

One M4 provided per foot.

To order separately use
MG-04




MMA-04

Magnet Mount
Accessory for M4

Sold separately, to order use
MMA-04

Each bracket comes with 2 #6
x 5/8" Flat Head SS


Required when mounting to a
non-magnetic surface



MG

Magnet Clip

15 FINISH



Satin

Black

Bronze

Custom color available

MMA-01



Magnet Mount
Accessory of MG-01

Sold separately, to order use
MMA-01

Each bracket comes with 2 #6
x 5/8" Flat Head SS

Required when mounting to a
non-magnetic surface



ESSENTIALS TORQ-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed


17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

Optimal Fixtures

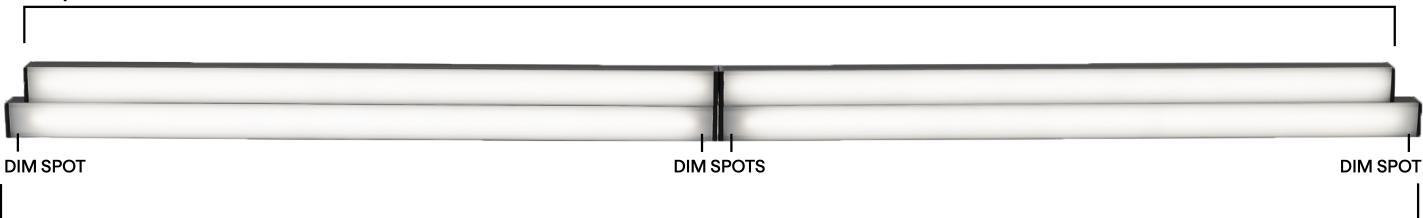

Exact Fixtures

RGB ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2	P1 & P2	S3 & S4	P3 & P4
12"	10.51"	10.86"	10.41"	10.51"
13"	12.51"	12.86"	12.41"	12.51"
14"	12.51"	12.86"	12.41"	12.51"
15"	14.51"	14.86"	14.41"	14.51"
16"	14.51"	14.86"	14.41"	14.51"
17"	16.51"	16.86"	16.41"	16.51"
18"	16.51"	16.86"	16.41"	16.51"
19"	18.51"	18.86"	18.41"	18.51"
20"	18.51"	18.86"	18.41"	18.51"
21"	20.51"	20.86"	20.41"	20.51"
22"	20.51"	20.86"	20.41"	20.51"
23"	22.51"	22.86"	22.41"	22.51"
24"	22.51"	22.86"	22.41"	22.51"
36"	34.51"	34.86"	34.41"	34.51"
48"	46.51"	46.86"	46.41"	46.51"
60"	58.51"	58.86"	58.41"	58.51"
72"	70.51"	70.86"	70.41"	70.51"
84"	82.51"	82.86"	82.41"	82.51"
96"	94.51"	94.86"	94.41"	94.51"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	RGB		RGB	
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX		Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX	
1%	QZ-DALI-DT8		Q-SET+QZ-DALI-DT8	
10%	Non-Dim Power Supply with RGB App Dongle			




ESSENTIALS TORQ-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGB App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

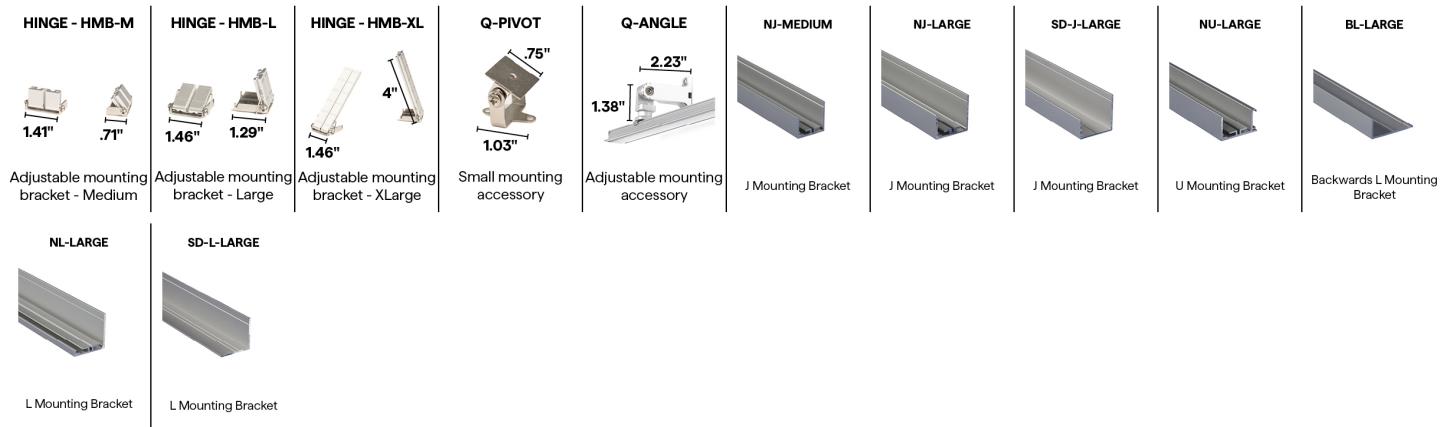

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated w/ silicone)

COMPATIBLE CONTROL ACCESSORIES



DMX controller for changing color & dimming



ESSENTIALS TORQ-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage