




MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed



- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Asymmetric fixture with an 80° focused beam 20° off-nadir
- Once installed, its wings are covered with tape and compound to create a seamless look
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

ORDERING PROCESS

A Specify LED Fixture

B Specify MUD-IN Housing

A. LED FIXTURE

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
POP-MD-01-DW	2.0	20/27	DRY	DF									
POP-MD-01-DW-USA		20/30		PR									

Sample Part Number: POP-MD-01-DW-2.0-2.0/30-DRY-DF-S1A-BW-CLS-WH-CL2-SP-ST-48"-E

A1 PRODUCT POP-MD-01-DW POP-MD-01-DW-USA Select USA option for BAA and BABA projects. LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	A2 WATTS/FT 2.0 2.0W/ft	A3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	A4 RATED DRY IP20	A5 LENS DF Diffused PR Polar For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
A6 WIRE INPUT/OUTPUT S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed S2A Single 2 (Input only) - Bottom Feed S2B Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed.	A7 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	A8 CONNECTOR/WIRE OUT CLS Closed End (No feed)		
A9 WIRE COLOR WH White BK Black	A10 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	A11 MOUNTING SC Screw SP Spring Clip For either mounting option POP-MD-MNT-KIT is required for mounting POP into the Mud-In Channel	A12 FINISH ST Satin BK Black BZ Bronze WH White CU Custom Custom finishes have longer lead times. Non-RAL 9003 whites custom.	A13 LENGTH (IN) Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".
				A14 EXACT/OPTIMAL E Exact specified length O Optimal illumination Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

B. MUD-IN HOUSING

B1	B2
PRODUCT	LENGTH
POP-MD	

Sample Part Number: **POP-MD-FCN**


B1	PRODUCT	B2	LENGTH
	POP-MD		FCN Field Cuttable CTL Cut to Length Full length 98.43" housings will be sent for field cuttable specifications. Quantity will be determined by dividing the POP fixture measurements by 98.43 and rounding up. Cut to length housing specifications will be the length of the POP fixture specified, plus .125" for endcaps.




MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed


A1 PRODUCT - DIMENSIONS




Profile



Profile with mud-in accessory



Profile with mud-in accessory and spring clip




Profile with mud-in accessory and screw mount

END CAPS

Flat end caps



Feed



Feed

To order separately, use
POP-EC-MDIN-A-ST

To order separately, use
POP-EC-MDIN-B-ST

A2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]

Tested with POP-01-DW-2.0-**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI								
PR	77	93	89	98	93	98	95	97	100	97
DF	69	93	81	98	83	98	86	97	93	97

A5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

2W/ft

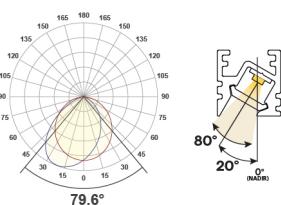

DF lens at 3000K



MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS



24VDC Linear Fixtures - Recessed

TEMPERATURE RATINGS


		DW 2.0 W/FT	DW 4.0 W/FT
		QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply
		Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	130°F
		-4°F	110°F

A6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

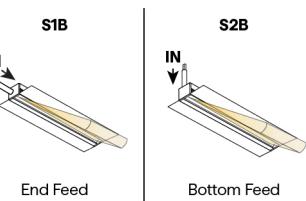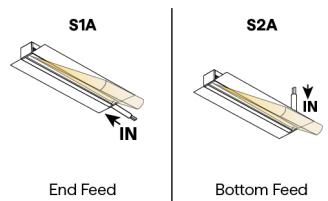


ASYMMETRIC ONLY PASS THROUGH (Input/Output)

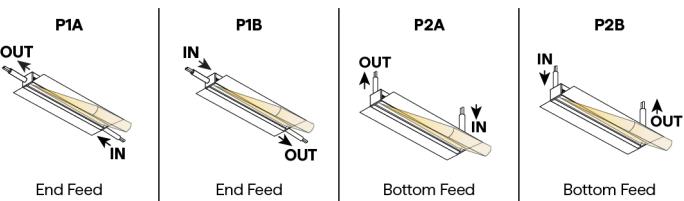


CONFIGURATION OPTIONS

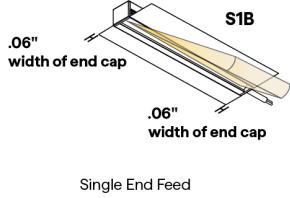


Single End Feed

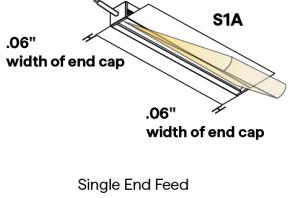


Single End Feed




Connection by others
Non-Continuous End Feed




Connection by others
Non-Continuous End Feed

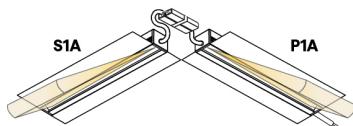


Connection by others
Non-Continuous Corner Feed

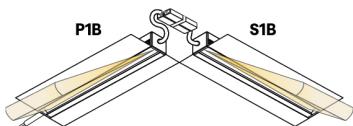


Connection by others
Non-Continuous Corner Feed



Continuous Bottom Feed



Continuous Bottom Feed



Continuous End to End Feed




MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

A7 / A8 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

BW



Bare Wire 24"
22 AWG

A9 WIRE COLOR




White

Black

A11 MOUNTING

POP-MD-MNT-KIT




Plastic Clip Kit

2 clips provided for 4' or less;
4 clips provided for greater
than 4'

To order separately use POP-
MD-MNT-KIT

Each clip comes with a #4 x
3/16 Flat Head SS" and two
#6 x 1/8" long set screws

SP



Spring Clip

Only to be used with mud-in
accessory

4 clips provided for each full
length of MUD-IN

To order separately use
SP-02


832



832 Silicone

Sold separately

SC



Screw

6 #6x1.75" flat head screws
are provided for each full
length of MUD-IN

A12 FINISH



Satin

Black

Bronze

White

Custom finishes require a longer lead time, consult factory




MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

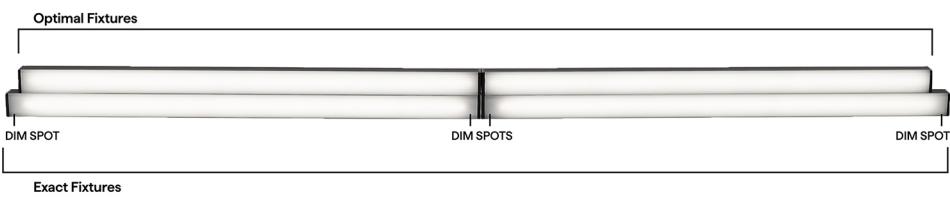

DW DRY LENGTHS BY INCH

EXACT LENGTH


Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
	S1	S2	P1	P2
12"	10.50"	10.75"		
13"	12.50"	12.75"		
14"	12.50"	12.75"		
15"	14.50"	14.75"		
16"	14.50"	14.75"		
17"	16.50"	16.75"		
18"	16.50"	16.75"		
19"	18.50"	18.75"		
20"	18.50"	18.75"		
21"	20.50"	20.75"		
22"	20.50"	20.75"		
23"	22.50"	22.75"		
24"	22.50"	22.75"		
36"	34.50"	34.75"		
48"	46.50"	46.75"		
60"	58.50"	58.75"		
72"	70.50"	70.75"		
84"	82.50"	82.75"		
96"	94.50"	94.75"		

A14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

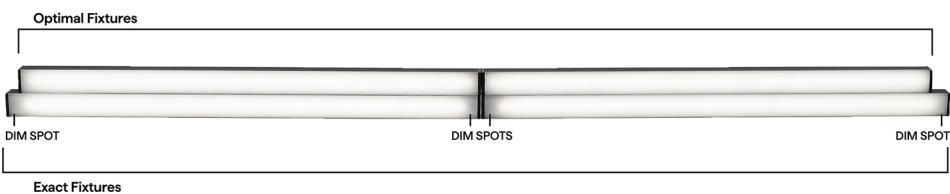



MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed


COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature
junction box, DRY/DMP
(WET rated with silicone)



MICRO 5 POP MUD-IN-FLAT (01) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage