




# MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations
- 60% smaller than ESSENTIALS-TORQ
- Delivers equivalent efficacy as standard size fixtures
- Ideal for surface mounted or recessed installations that call for low-profile light in small areas
- Features a stainless steel mounting clip, making installation and repositioning effortless
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled

## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS
ATOM-03-DW ATOM-03-DW-USA	2.0		ENC	TL

## ADDITIONAL INFORMATION REQUIRED TO ORDER

6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
					SST			

Sample Part Number: **ATOM-03-DW-2.0-24/30-ENC-TL-S1-BW-CLS-WH-CL2-SST-ST-48"-E**

<b>1</b> <b>PRODUCT</b>  <b>ATOM-03-DW</b> <b>ATOM-03-DW-USA</b>  Select USA option for BAA and BABA projects.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  2.0 2.0W/ft	<b>3</b> <b>CCT</b>  24/30 2400K/3000K 27/40 2700K/4000K	<b>4</b> <b>RATED</b>  ENC IP67	<b>5</b> <b>LENS</b>  TL Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages
<b>6</b> <b>WIRE INPUT/OUTPUT</b>  <b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed <b>S3</b> Left Side Feed <b>S4</b> Right Side Feed  For continuous mounting, consider bottom feed.	<b>7</b> <b>CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>8</b> <b>CONNECTOR/WIRE OUT</b>  <b>CLS</b> Closed End (No feed)		
<b>9</b> <b>WIRE COLOR</b>  <b>WH</b> White <b>BK</b> Black	<b>10</b> <b>WIRE TYPE</b>  <b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)	<b>11</b> <b>MOUNTING</b>  <b>SST</b> Stainless Steel	<b>12</b> <b>FINISH</b>  <b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory	<b>13</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".
				<b>14</b> <b>EXACT/OPTIMAL</b>  <b>E</b> Exact specified length <b>O</b> Optimal illumination


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 1 PRODUCT - DIMENSIONS

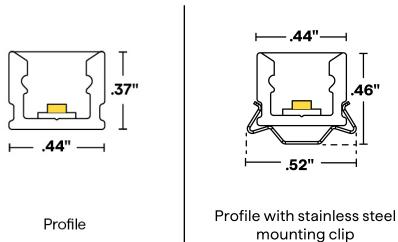

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with ATOM-03-DW-2.0-\*\*-ENC

	2400K		2700K		3000K		4000K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
TL	79	93	86	93	83	95	91	97

## 5 DIODE VISIBILITY




ENC/TL - Translucent encapsulation

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

2W/ft



ENC/CL at 3000K

## TEMPERATURE RATINGS

	DW 2.0 W/FT		DW 4.0 W/FT	
QTL power supply other than DALI, DMX	DALI, DMX, or non-QTL power supply			
	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	115°F




# MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## 6 WIRE INPUT/OUTPUT


SINGLE (Input only)

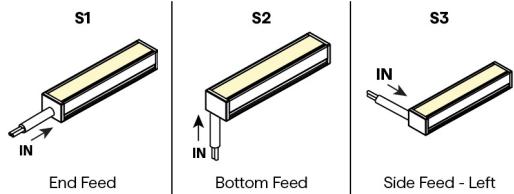

PASS THROUGH (Input/Output)

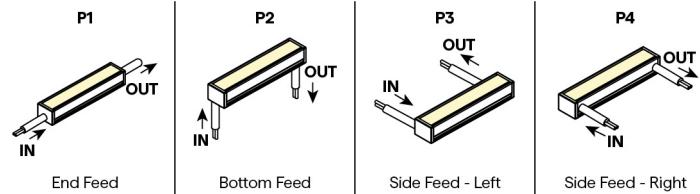


## CONFIGURATION OPTIONS

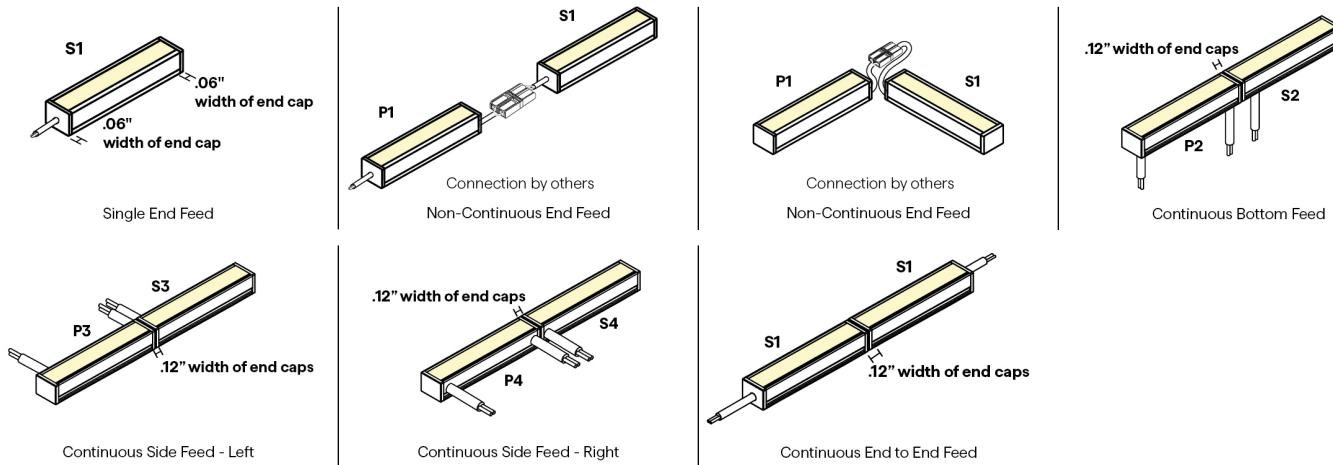

## 7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

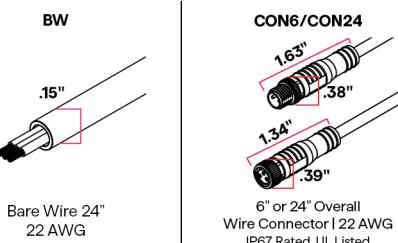

## 9 WIRE COLOR






# MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## 11 MOUNTING

SST



Stainless Steel Clip

2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'

To order separately use  
SST-08

Each clip comes with a #4 x 5/8" Flat Head SS

## 12 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

## 15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

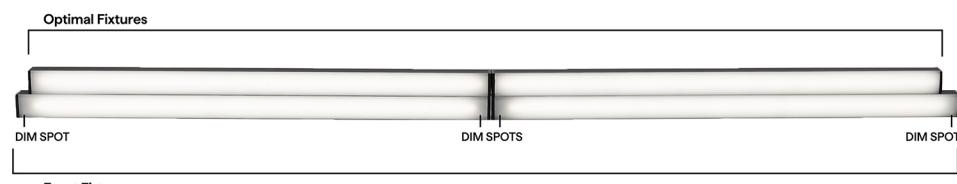



# MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## DW ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH


Requested Nominal Length	S1	S1 & S2 & S3 & S4	P1 & P2 & P3 & P4
12"	10.48"	10.48"	10.83"
13"	12.48"	12.48"	12.83"
14"	12.48"	12.48"	12.83"
15"	14.48"	14.48"	14.83"
16"	14.48"	14.48"	14.83"
17"	16.48"	16.48"	16.83"
18"	16.48"	16.48"	16.83"
19"	18.48"	18.48"	18.83"
20"	18.48"	18.48"	18.83"
21"	20.48"	20.48"	20.83"
22"	20.48"	20.48"	20.83"
23"	22.48"	22.48"	22.83"
24"	22.48"	22.48"	22.83"
36"	34.48"	34.48"	34.83"
48"	46.48"	46.48"	46.83"
60"	58.48"	58.48"	58.83"
72"	70.48"	70.48"	70.83"
84"	82.48"	82.48"	82.83"
96"	94.48"	94.48"	94.83"

## 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

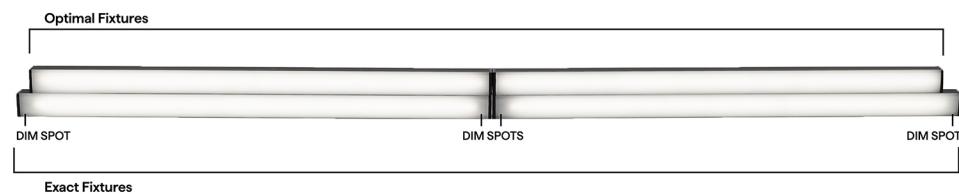



# MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-DW Tunable Applications	MICRO 5-DW Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-DW Tunable Applications	MICRO 5-DW Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products		Q-SET-QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-S	QUOVA-MICRO	VHB
.141" .51"	QUOVA Knife Edge	Double sided mounting tape
Adjustable mounting bracket - Small	QUOVA Knife Edge	Double sided mounting tape



## MICRO 5 ATOM-ENCAPSULATED (03) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

### COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write DMX addresses and adjust voltage