




OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed



- Choose from diffused, polar or frosted lens options for varying diode visibility and beam cutoff
- Delivers smooth and consistent light to highlight architectural features and surfaces
- Ideal for surface-mounted installations
- Integrated metal end caps combined with an extruded aluminum housing give this fixture a polished modern look
- Suitable for installation in the storage area of a clothes closet when specified at 4.0 watts or less per foot per NEC regulations

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS
OP1SWDR OP1SWDR-USA	DRY			

ADDITIONAL INFORMATION REQUIRED TO ORDER

6 WIRE INPUT/ OUTPUT	7 CONNECTOR/ WIRE IN	8 CONNECTOR/ WIRE OUT	9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/ OPTIMAL

Sample Part Number: **OP1SWDR-5.0-30-DRY-DF-S1-BW-CLS-BK-CL2-CC-BK-48"-E**


1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED		
OP1SWDR OP1SWDR-USA	1.5 3.0 4.0 5.0 1.5HE 3.0HE 6.0HE 9.0HE	1.5W/ft 3.0W/ft 4.0W/ft 5.0W/ft 15W/ft HE 3.0W/ft HE 6.0W/ft HE 9.0W/ft HE	20 22 24 27 30 35 40	2000K 2200K 2400K 2700K 3000K 3500K 4000K	
Select USA option for BAA and BABA projects.					
See following pages for compatible power supplies.					
5 LENS	6 WIRE INPUT/OUTPUT	7 CONNECTOR/WIRE IN	8 CONNECTOR/WIRE OUT		
DF Diffused PR Polar FR Frosted	SINGLE (Input only) S1 End Feed S2 Bottom Feed PASS THROUGH (Input/Output) P1 End Feed P2 Bottom Feed	BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"	CLS Closed End (No feed) BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24"		
	For continuous mounting, consider bottom feed.	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		
9 WIRE COLOR	10 WIRE TYPE	11 MOUNTING	12 FINISH	13 LENGTH (IN)	14 EXACT/OPTIMAL
WH White BK Black	CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	CC Concealed Clip MG Magnet	ST Satin BK Black WH White CU Custom	Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.



OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

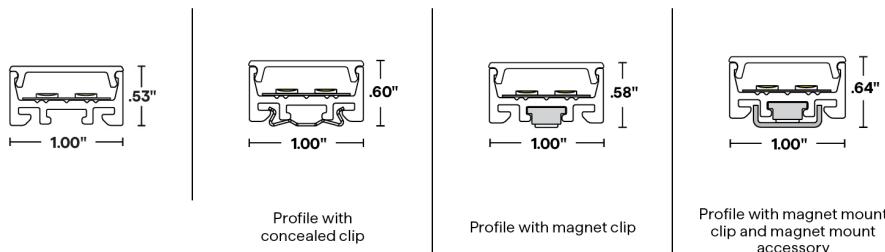

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 for HE]


Tested with OP1SWDR-**-30-DRY-STD

	1.5 W/FT		1.5HE W/FT		3.0 W/FT		3.0HE W/FT		4.0 W/FT		5.0 W/FT		6.0HE W/FT		9.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
FR	145	97	161	98	287	98	318	98	398	98	484	98	634	98	928	98
PR	136	97	151	98	271	98	302	98	377	98	453	98	600	98	876	98
DF	121	97	136	98	240	97	272	98	333	98	399	98	536	98	784	98

TEMPERATURE RATINGS

	DRY	1.5 W/FT		1.5 W/FT HE		3.0 W/FT		3.0 W/FT HE		4.0 W/FT		5.0 W/FT		6.0 W/FT HE		9.0 HE	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	130°F	-4°F	125°F	-4°F	125°F	-4°F	105°F

5 DIODE VISIBILITY

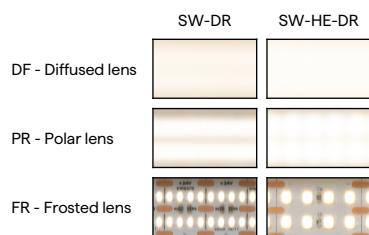




OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed


PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.




6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)



CONFIGURATION OPTIONS

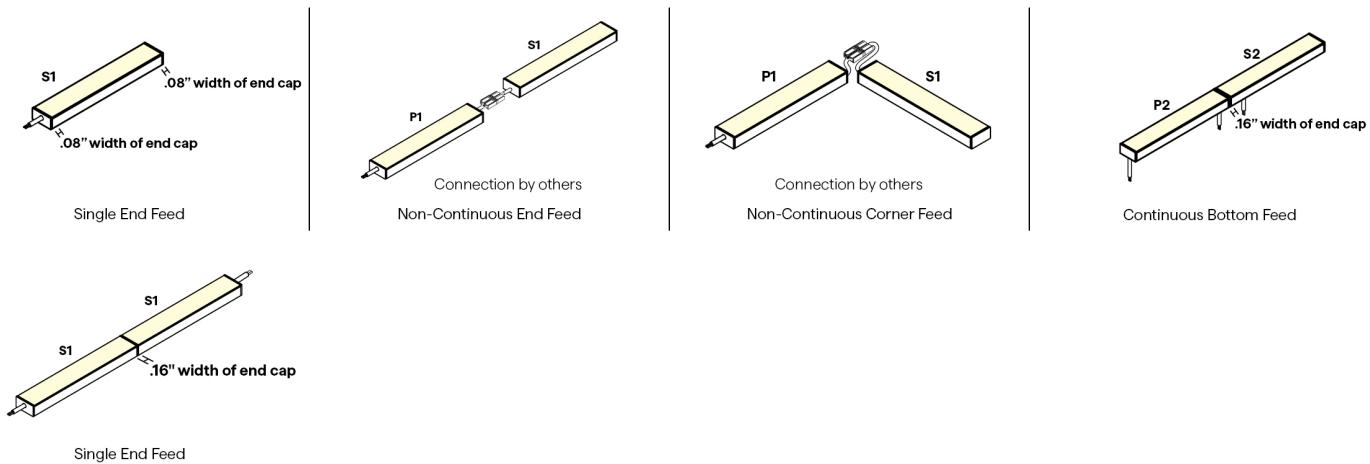




OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed

7 / 8 CONNECTOR/WIRE – IN/OUT




Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

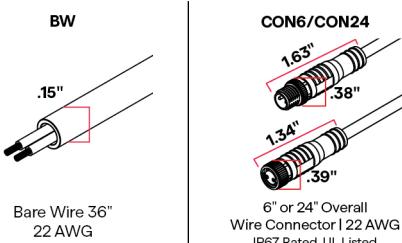


9 WIRE COLOR



11 MOUNTING

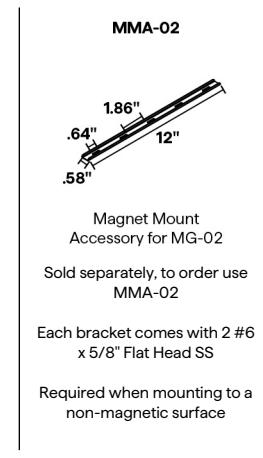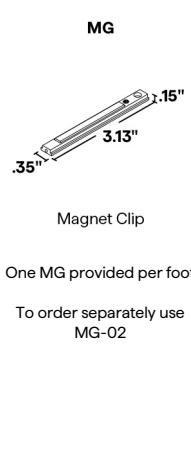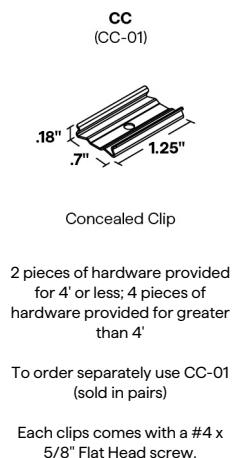


12 FINISH



Custom finishes require a longer lead time, consult factory

14 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

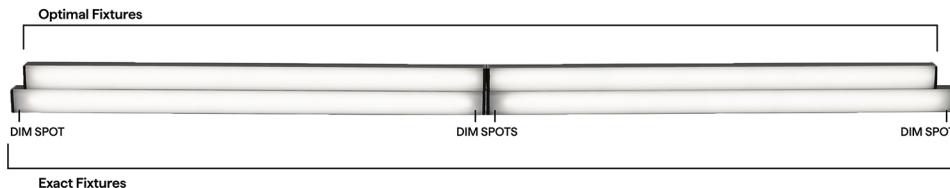



OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed

SWDR DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.25"
13"	0.25"
14"	0.25"
15"	0.25"
16"	0.25"
17"	0.25"
18"	0.25"
19"	0.25"
20"	0.25"
21"	0.25"
22"	0.25"
23"	0.25"
24"	0.25"
36"	0.25"
48"	0.25"
60"	0.25"
72"	0.25"
84"	0.25"
96"	0.25"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.91"		11.66"	
13"	12.91"		12.66"	
14"	13.91"		13.66"	
15"	14.91"		14.66"	
16"	15.91"		15.66"	
17"	16.91"		16.66"	
18"	17.91"		17.66"	
19"	18.91"		18.66"	
20"	19.91"		19.66"	
21"	20.91"		20.66"	
22"	21.91"		21.66"	
23"	22.91"		22.66"	
24"	23.91"		23.66"	
36"	35.91"		35.66"	
48"	47.91"		47.66"	
60"	59.91"		59.66"	
72"	71.91"		71.66"	
84"	83.91"		83.66"	
96"	95.91"		95.66"	

SWDR-HE DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	0.5"
13"	0.5"
14"	0.5"
15"	0.5"
16"	0.5"
17"	0.5"
18"	0.5"
19"	0.5"
20"	0.5"
21"	0.5"
22"	0.5"
23"	0.5"
24"	0.5"
36"	0.5"
48"	0.5"
60"	0.5"
72"	0.5"
84"	0.5"
96"	0.5"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	11.41"		11.66"	
13"	12.41"		12.66"	
14"	13.41"		13.66"	
15"	14.41"		14.66"	
16"	15.41"		15.66"	
17"	16.41"		16.66"	
18"	17.41"		17.66"	
19"	18.41"		18.66"	
20"	19.41"		19.66"	
21"	20.41"		20.66"	
22"	21.41"		21.66"	
23"	22.41"		22.66"	
24"	23.41"		23.66"	
36"	35.41"		35.66"	
48"	47.41"		47.66"	
60"	59.41"		59.66"	
72"	71.41"		71.66"	
84"	83.41"		83.66"	
96"	95.41"		95.66"	



OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SW24/1.5-4.0
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle

DIMMING PROTOCOL	INDOOR
	SW24/1.5-4.0
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle



OPTI-FLAT (01) STATIC WHITE DOUBLE ROW

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" 1.71"	HINGE - HMB-L 1.46" 1.29"	HINGE - HMB-XL 1.46" 4"	Q-PIVOT 75° 1.03"	Q-ANGLE 1.38" 2.23"	QUOVA-STANDARD 	NJ-LARGE 	NU-LARGE 	SD-J-LARGE 	BL-LARGE
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	QUOVA Knife Edge	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket	Backwards L Mounting Bracket
BL-LARGE Backwards L Mounting Bracket	NL-LARGE L Mounting Bracket	SD-L-LARGE L Mounting Bracket	MMA-02 .58"	Magnet Mount Accessory of MG-02					

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 2" 1.25"	Q-mini-J5 2.80" 2.27"	CON120-EXT 10ft Con cable extender	CON FOUR-FER Splits lead from one to four LED Con connectors	CON M - BARREL F Male con to barrel cable adaptor
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	ULL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	DRY/DMP/WET	DRY/DMP/WET	DRY/DMP

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage