



# VERS-PROUD-SK (01) STATIC COLOR

24VDC Linear Fixtures - Suspended

white optics<sup>®</sup>

UL LISTED

RoHS

EPD

5 YEAR WARRANTY

Certified with  
Red & Amber



- 80 Suspension Kit configurations allow fixture to be seamlessly incorporated into any interior
- Create long, continuous lines of light with easy-to-use inline bracket and double feed joiner connectors
- The lens sits proud of the fixture, allowing the most LED light engine options of any VERSatile fixture
- The lens creates a slim decorative line of light along the edge of the fixture
- Features integrated metal endcaps and durable anodized aluminum housings
- Optional external louver accessory offered in matte black or white finish
- With standard internal White Optics coating, fixtures achieve greater lumen efficacies
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/OPTIMAL
VERS-01-SK-SC	5.0					S2	BW	CLS	SV	AWM	SK			

Sample Part Number: VERS-01-SC-5.0-GR-DRY-DF-L1-BK-P1-CON6-CON6-BK-CL2-MG-BK-48"-E

<b>1</b> <b>PRODUCT</b>  VERS-01-SK-SC  See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b>  5.0 5.0W/ft	<b>3</b> <b>CCT</b>  A Amber B Blue G Green R Red	<b>4</b> <b>RATED</b>  DRY IP20 DMP IP54	<b>5</b> <b>LENS</b>  DF Diffused PR Polar FR Frosted  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages.	<b>6</b> <b>EXTERNAL LOUVER</b>  L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver  Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. White and custom painted finishes are not compatible with external louvers.
<b>7</b> <b>WIRE INPUT/OUTPUT</b>  S2 Single 2 (Input only) - Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b>  BW Bare Wire (Standard 36")  BW: Standard length is 36", max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9</b> <b>CONNECTOR/WIRE OUT</b>  CLS Closed End (No feed)	<b>10</b> <b>WIRE COLOR</b>  SV Silver		
<b>11</b> <b>WIRE TYPE</b>  AWM Appliance Wiring Material	<b>12</b> <b>MOUNTING</b>  SK Suspension Bracket	<b>13</b> <b>FINISH</b>  ST Satin BK Black BZ Bronze WH White CU Custom  White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory.	<b>14</b> <b>LENGTH (IN)</b>  Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>15</b> <b>EXACT/OPTIMAL</b>  O Optimal Illumination E Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# VERS-PROUD-SK (01) STATIC COLOR

24VDC Linear Fixtures - Suspended

## 1 PRODUCT - DIMENSIONS

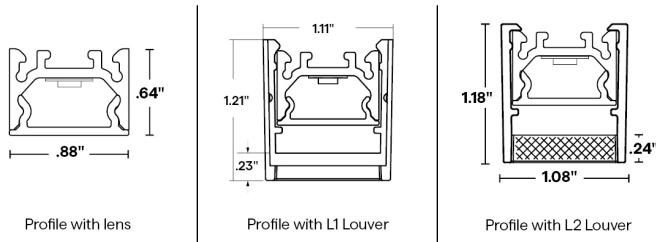

## 2 DELIVERED LUMENS

[Calculated L70 = 50000 hrs]  
Tested with VERS-01-SK-SC-5.0-\*\*-DRY

	Red		Green		Blue		Amber	
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength
FR	116	634	554	519	127	467	86	595
PR	111	634	546	519	123	467	80	596
DF	105	634	490	519	114	467	73	596

## 5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

FR - Frosted lens

## PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

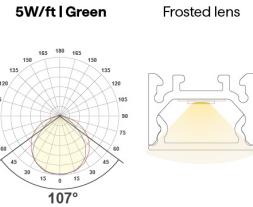

## TEMPERATURE RATINGS

		5.0 W/FT	
		Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	125°F
DMP	Ambient Operating Temp - Surface	-4°F	120°F
WET	Ambient Operating Temp - Surface	-4°F	120°F




## VERS-PROUD-SK (01) STATIC COLOR


24VDC Linear Fixtures - Suspended

### 6 EXTERNAL LOUVER

#### PLASTIC

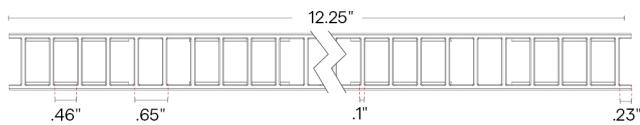

L1-XX





Lumen Multiplier  
WH BK




### 7 WIRE INPUT/ OUTPUT

#### CONFIGURATION OPTIONS


##### SINGLE (Input only)



Single Feed



Continuous Row End Feeds




Continuous Row Center Feeds

### 8 / 9 CONNECTOR/WIRE - IN/OUT


Connector/Wire In or Out not needed to specify product.

#### BW



Bare Wire 36" | 22 AWG  
Clear outer jacket, metal shield

### 10 WIRE COLOR




Silver



## VERS-PROUD-SK (01) STATIC COLOR

24VDC Linear Fixtures - Suspended

### 12 MOUNTING



Suspension Bracket

2 required up to 6' lengths;  
additional support required  
between 6' to 8'

### 13 FINISH




Custom finishes require a longer  
lead time, consult factory

### 15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

#### Optimal Fixtures

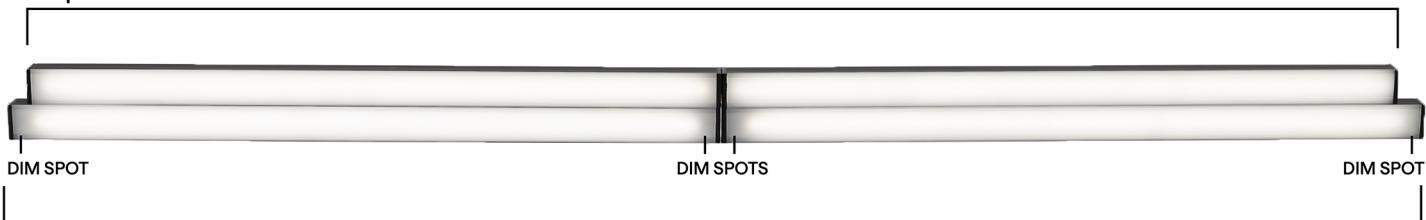

#### Exact Fixtures

### SC DRY, DMP LENGTHS BY INCH

Available in any length in between 24" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is  $\pm 0 - 1/8"$ . Consult factory for lengths under 24".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S2 S2 IN	
12"	10.49"	
13"	12.49"	
14"	12.49"	
15"	14.49"	
16"	14.49"	
17"	16.49"	
18"	16.49"	
19"	18.49"	
20"	18.49"	
21"	20.49"	
22"	20.49"	
23"	22.49"	
24"	22.49"	
36"	34.49"	
48"	46.49"	
60"	58.49"	
72"	70.49"	
84"	82.49"	
96"	94.49"	



# VERS-PROUD-SK (01) STATIC COLOR

24VDC Linear Fixtures - Suspended

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	SC
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle

DIMMING PROTOCOL	INDOOR
	SC
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN
ECO System	QTM-eLED(E)
DMX	QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle



## VERS-PROUD-SK (01) STATIC COLOR

24VDC Linear Fixtures - Suspended

### COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

### COMPATIBLE APPS

#### NFC APP



Read and write DMX addresses and adjust voltage



# VERS-SK

## Linear Fixtures - Suspended



- Shop drawings required for run lengths over 8ft
- If no suspension length provided, 36" is standard
- Suspension cable maximum length: 120"
- Suspension cable is field cuttable
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Any run length over 8' requires inline brackets
- Consult factory for power over aircraft
- Consult factory for custom color of canopy
- Lag Screw is for mounting into drywall, wood, or other types of finished ceilings for non-feed mounting only

### POWER FEED SUSPENSION KIT

1 PRODUCT	2 FEED	3 CANOPY SHAPE	4 CANOPY SIZE	5 CANOPY FINISH	6 APPLICATION	7 SUSPENSION CABLE LENGTH (IN)
SK			5"			

Sample Part Number: SK-SF-RD-5"-WH-JB-36"

1 PRODUCT	2 FEED	3 CANOPY SHAPE	4 CANOPY SIZE	5 CANOPY FINISH	6 APPLICATION	7 SUSPENSION CABLE LENGTH (IN)
SK	SF DF Single Double	RD SQ Round Square	5"	WH BK White Black	JB TB Junction Box T-Bar Mount  JB - mounting bracket only, junction box not included TB - mounting bracket and junction box	36" 120"

### NON-FEED SUSPENSION KIT

1 PRODUCT	2 FEED	3 CANOPY SHAPE	4 CANOPY SIZE	5 CANOPY FINISH	6 APPLICATION	7 SUSPENSION CABLE LENGTH (IN)
SK	NF					

Sample Part Number: SK-SF-RD-5"-WH-JB-36"

1 PRODUCT	2 FEED	3 CANOPY SHAPE	4 CANOPY SIZE	5 CANOPY FINISH	6 APPLICATION	7 SUSPENSION CABLE LENGTH (IN)
SK	NF No Feed	RD SQ Round Square	2" 5" 5"	WH BK White Black	TB T-Bar Mount LS Lag Screw  TB - T-Bar clip only, junction box not included	36" 120"

### KIT CONTENTS

#### JBOX

- 1/16" Steel suspension cable – 36" standard
- Selected canopy
- Cable Gripper
- Cable Coupler
- Bracket to mount to junction box (junction box not included)
- Wire strain relief
- Ties for securing electrical cable to suspension cable

#### T-BAR - feed

- Includes junction box specifically designed for T-BAR applications
- Bracket to mount to junction box
- Wire strain relief
- Ties for securing electrical wire to suspension cable

#### T-BAR - non-feed

- Bracket to mount to T-BAR (no junction box)

#### LAG SCREW - non-feed only


- Double ended screw, with a wood thread side and machine thread side
- One piece cable coupler



## VERS-SK

Linear Fixtures - Suspended


### 3 CANOPY OPTIONS

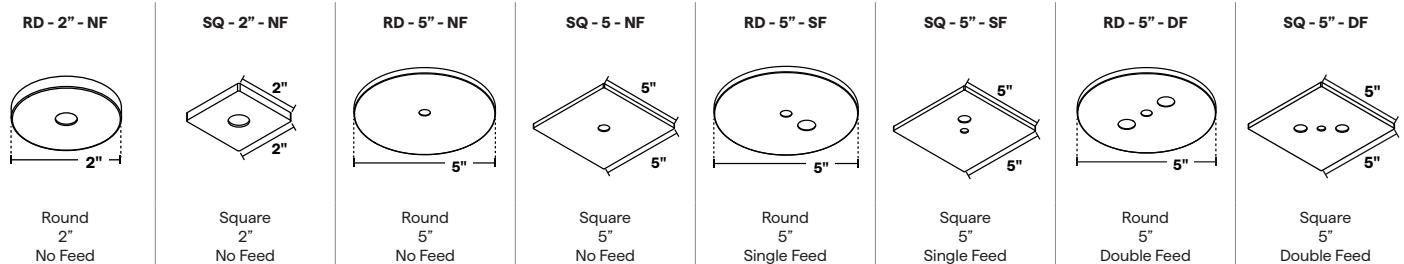


### 5 CANOPY FINISH




### JOINTS/CONNECTORS

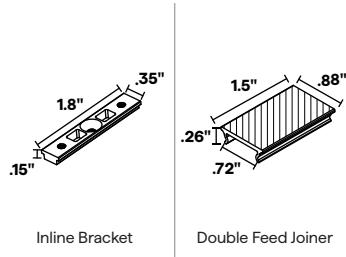

### 6 APPLICATION

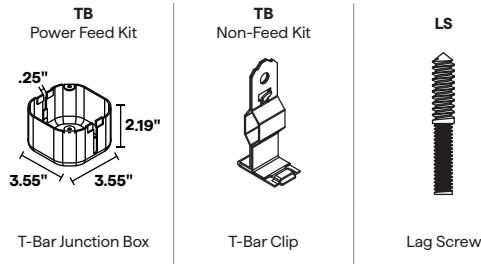

### KIT HARDWARE

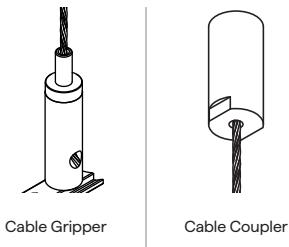





### MOUNTING

- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double fed fixture will come with double feed joiner and inline bracket


UP TO 6FT

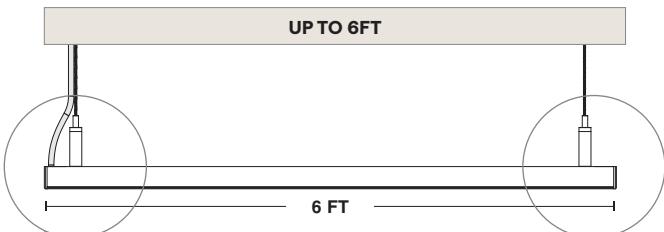


BETWEEN 6FT and 8FT

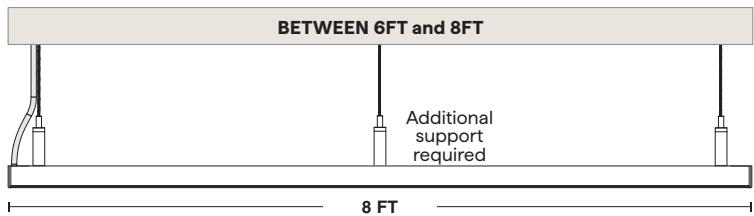

Power Feed Suspension

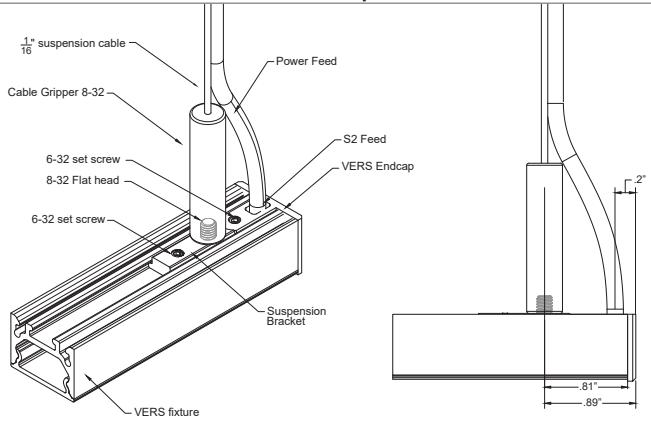

Non-Feed Suspension

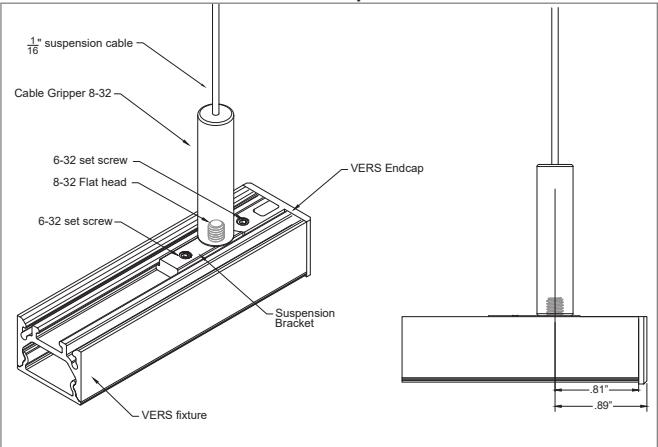





# VERS-SK

## Linear Fixtures - Suspended

## **MOUNTING**





- Maximum single fixture length: 98"
- Suspended fixtures over 6ft require additional suspension points. 8ft lengths will bow 0.25" in middle without additional support.
- Shop drawings required for run lengths over 8ft
- Any double feed fixture will come with double feed joiner and inline bracket

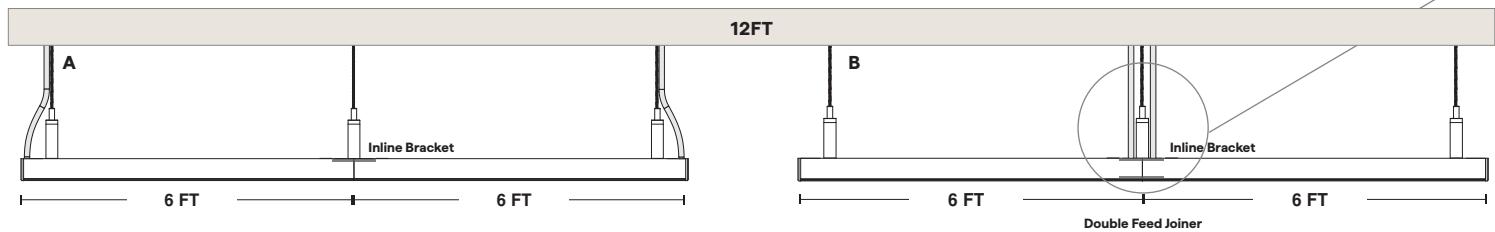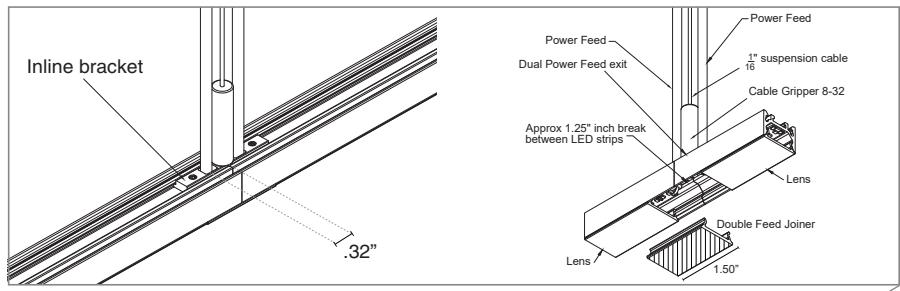

**Part number example for a suspended VERS-01 dry rated static white fixture with a diffused lens in 1.5W/ft, 3000K, in a satin finish:**

**A** VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)  
SK-SF-RD-5"-WH-JB-36" (2X)  
SK-NF-RD-5"-WH-JB-36" (1X)

**B** VERS-01-SK-SW-1.5-30-DRY-DF-N/A-S2-BW-CLS-SV-AWM-SK-ST-144" (1X)  
SK-DF-RD-5"-WH-JB-36" (1X)  
SK-NF-RD-5"-WH-JB-36" (2X)

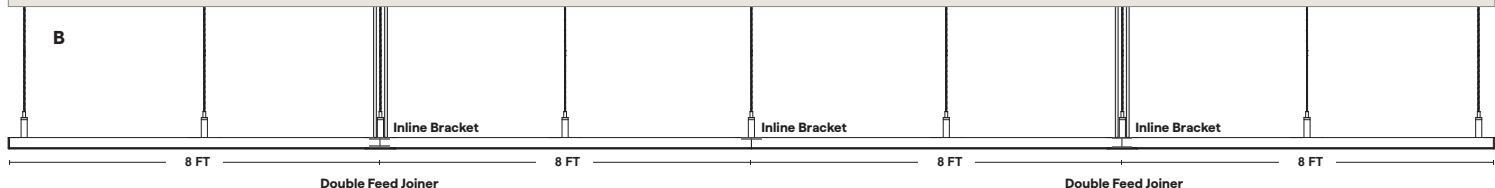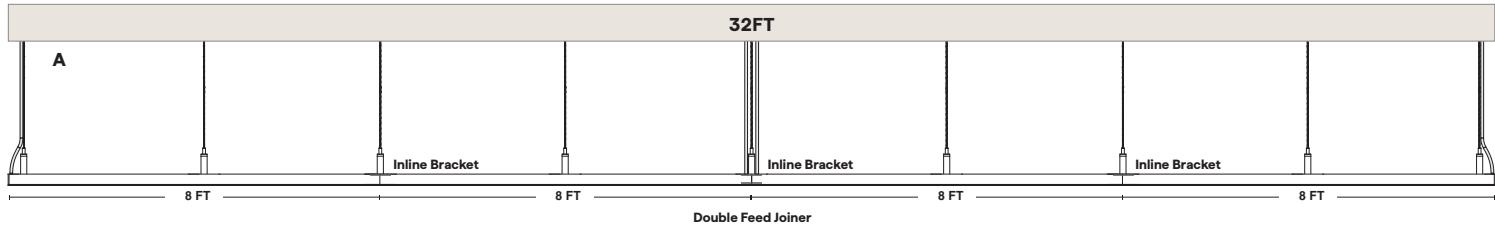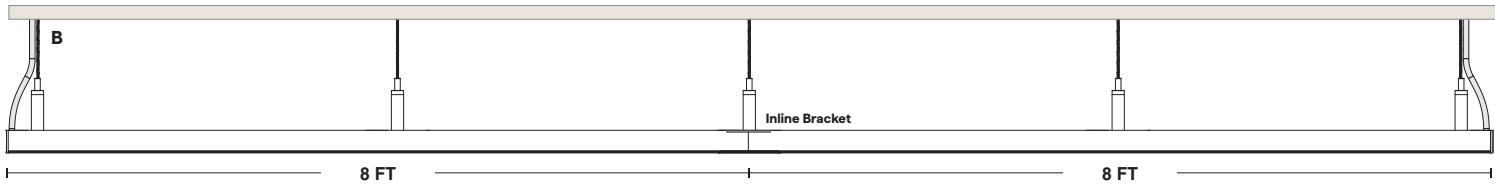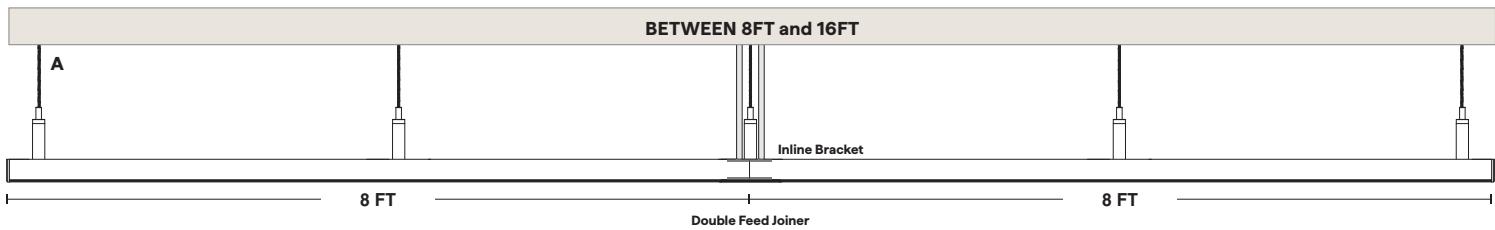




**VERS-SK**

Linear Fixtures - Suspended

## SUSPENSION T-BAR POWER FEED ASSEMBLY

SK-SF-RD-5-\*\*-TB-36

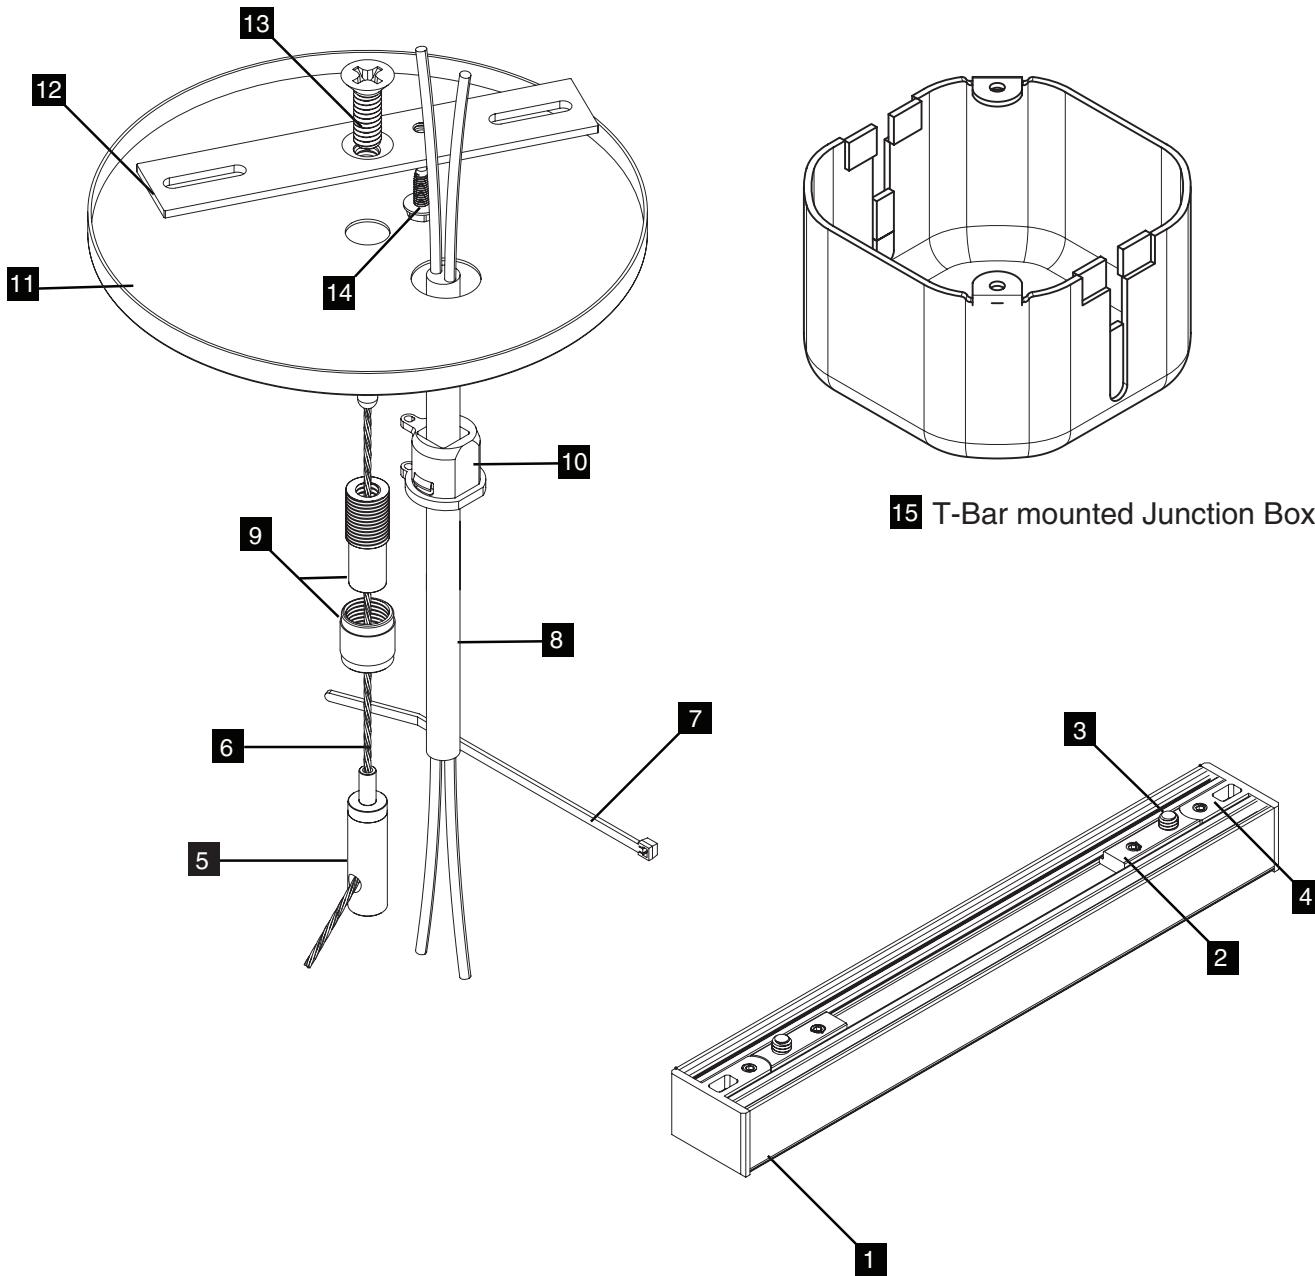

## VERS SUSPENSION COMPONENTS

1	VERS	2	Suspension Bracket	3	8-32 Screw	4	Endcap	5	Cable Gripper	6	1/16" Cable	7	Tie
8	Lead Wire	9	Cable Coupler	10	Strain Relief	11	Canopy	12	Crossbar	13	1/4"-20	14	Ground Screw




# VERS-SK

Linear Fixtures - Suspended

## SUSPENSION POWER FEED ASSEMBLY - TO MOUNT TO JUNCTION BOX\*

SK-SF-RD-5-\*\*-JB-36

\*JUNCTION BOX NOT INCLUDED

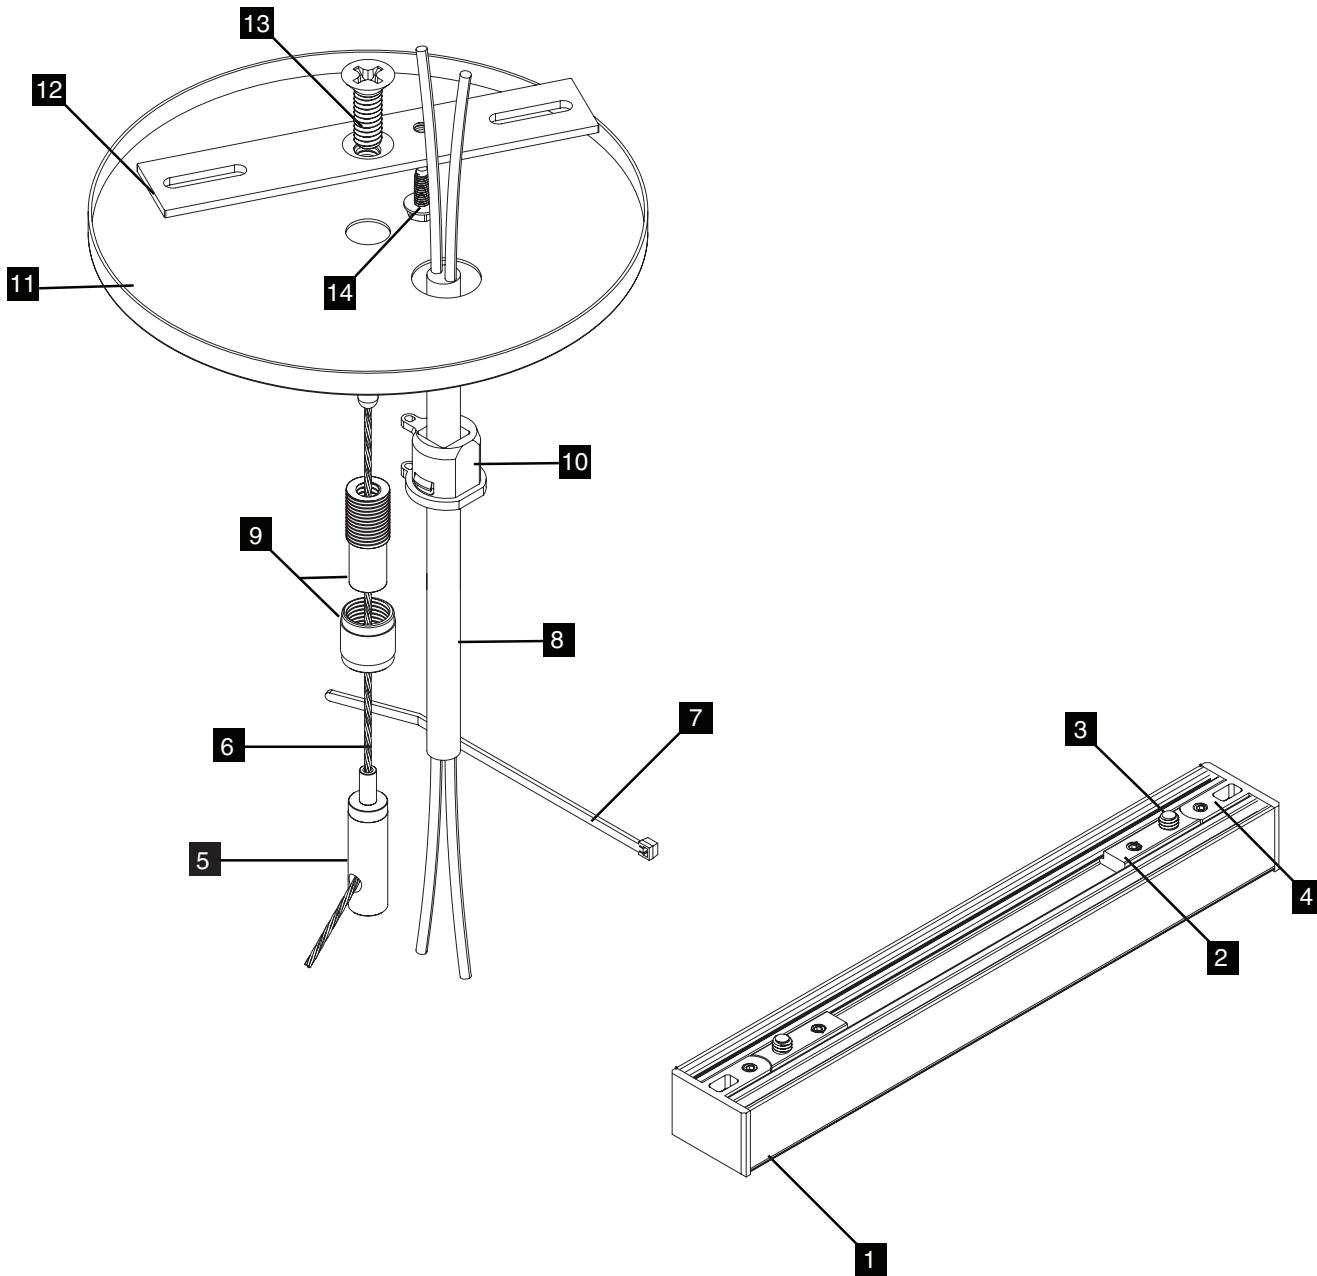

## VERS SUSPENSION COMPONENTS


1	VERS	2	Suspension Bracket	3	8-32 Screw	4	Endcap	5	Cable Gripper	6	1/16" Cable	7	Tie
8	Lead Wire	9	Cable Coupler	10	Strain Relief	11	Canopy	12	Crossbar	13	1/4"-20	14	Ground Screw

**VERS-SK**

Linear Fixtures - Suspended

**SUSPENSION T-BAR NON-FEED ASSEMBLY**

SK-NF-RD-2-NF-\* -TB-36

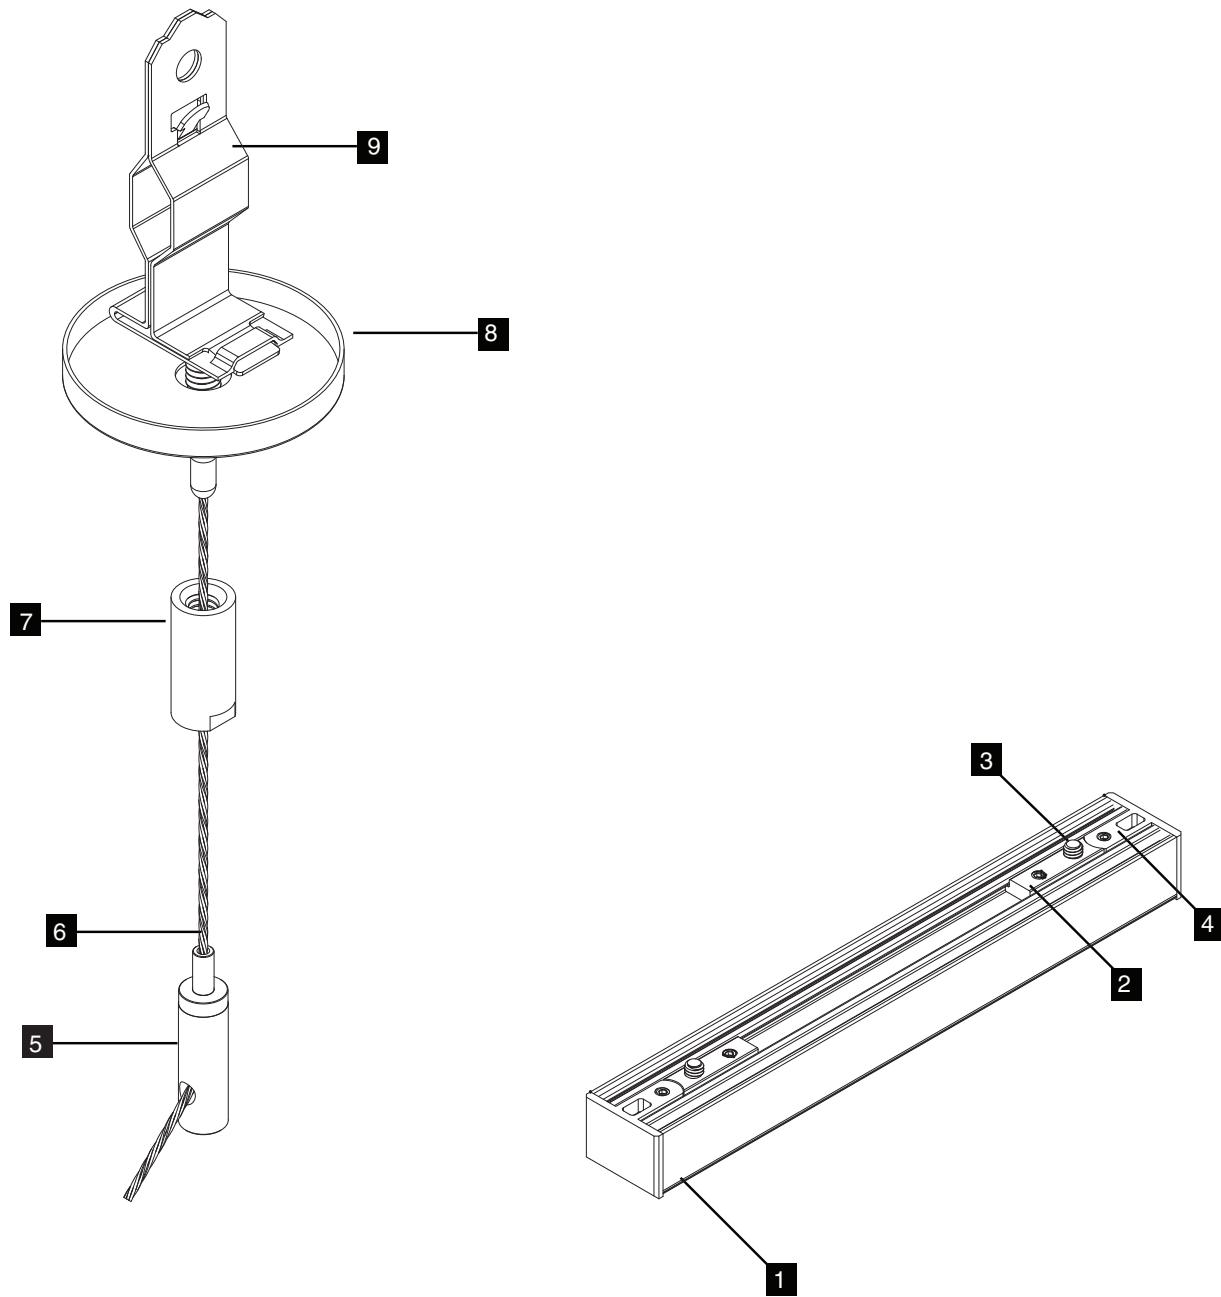**NON-POWERED FEED KIT**


<b>1</b>	VERS	<b>2</b>	Suspension Bracket	<b>3</b>	8-32 Screw	<b>4</b>	Endcap	<b>5</b>	Cable Gripper
<b>6</b>	1/16" Cable	<b>7</b>	Cable Coupler	<b>8</b>	Canopy	<b>9</b>	T-Bar Clip		

**VERS-SK**

Linear Fixtures - Suspended

**LAG SCREW NON-FEED ASSEMBLY**

SK-NF-RD-2-NF-\*-LS-36

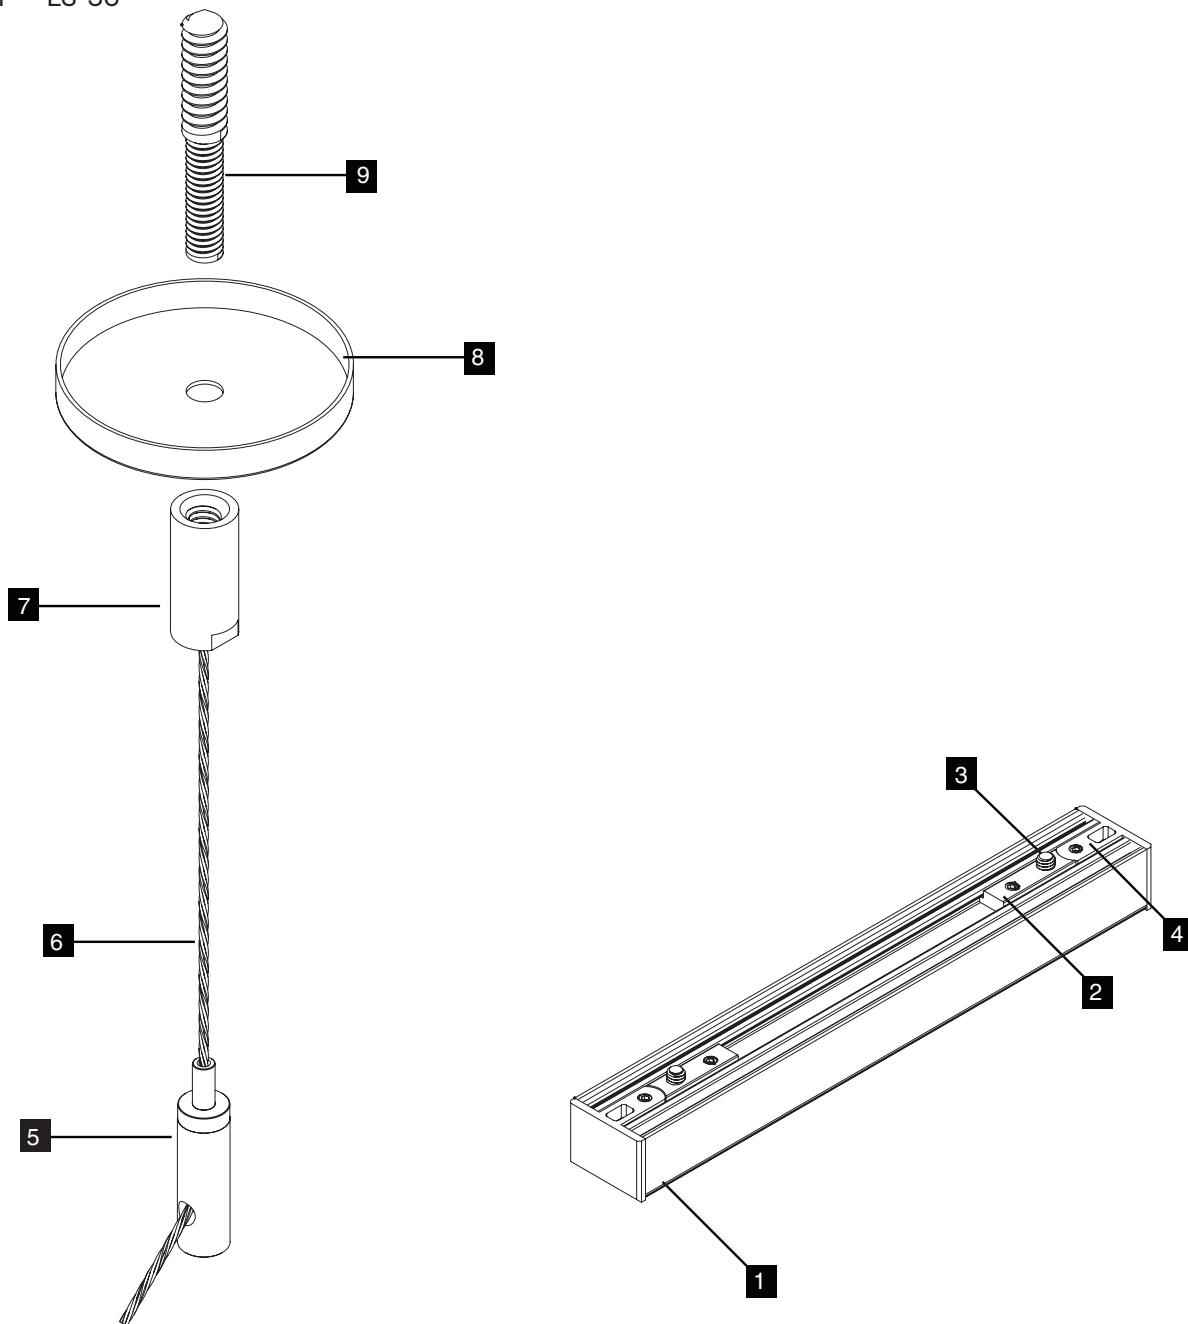**NON-POWERED FEED KIT**

<b>1</b> VERS	<b>2</b> Suspension Bracket	<b>3</b> 8-32 Screw	<b>4</b> Endcap	<b>5</b> Cable Gripper
---------------	-----------------------------	---------------------	-----------------	------------------------

<b>6</b> 1/16" Cable	<b>7</b> Cable Coupler	<b>8</b> Canopy	<b>9</b> Lag Screw
----------------------	------------------------	-----------------	--------------------