



VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Features a co-extruded lens with an internal reflector, maximizing light delivery for improved brightness.
- The fixture's flat lens sits flush, showcasing the versatile fixture's exceptional light performance in any indoor environment.
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

1 PRODUCT	2 WATTS/ FT	3 CCT	4 RATED	5 LENS	6 EXTERNAL LOUVER	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/ WIRE IN	9 CONNECTOR/ WIRE OUT	10 WIRE COLOR	11 WIRE TYPE	12 MOUNTING	13 FINISH	14 LENGTH (IN)	15 EXACT/ OPTIMAL

Sample Part Number: VERS-02-WD-6.0-19/30-DRY-DF-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E


1 PRODUCT VERS-02-WD LED engine is built with 2 wires suitable for phase dimming control. See following pages for compatible power supplies.	2 WATTS/FT 6.0 6.0W/ft 1.5HE 1.5W/ft HE 2.5HE 2.5W/ft HE 4.0HE 4.0W/ft HE	3 CCT 19/27 1900K/2700K 19/30 1900K/3000K 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	4 RATED DRY IP20 DRY IP20	5 LENS DF Diffused PR Polar For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers.
7 WIRE INPUT/OUTPUT S1 Single 1 (Input only) - End Feed S2 Single 2 (Input only) - Bottom Feed P1 Pass Through 1 (Input/output) - End Feed P2 Pass Through 2 (Input/output) - Bottom Feed	8 CONNECTOR/WIRE IN BW CON6 CON24 Bare Wire (Standard 36") Connector 6" Connector 24" BW CON6 CON24 Bare Wire (Standard 36") Connector 6" Connector 24"	9 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW CON6 CON24 Bare Wire (Standard 36") Connector 6" Connector 24"	10 WIRE COLOR WH BK White Black		
When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.		BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)		BW: Standard length is 36", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	
11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver	13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.	14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.	



VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

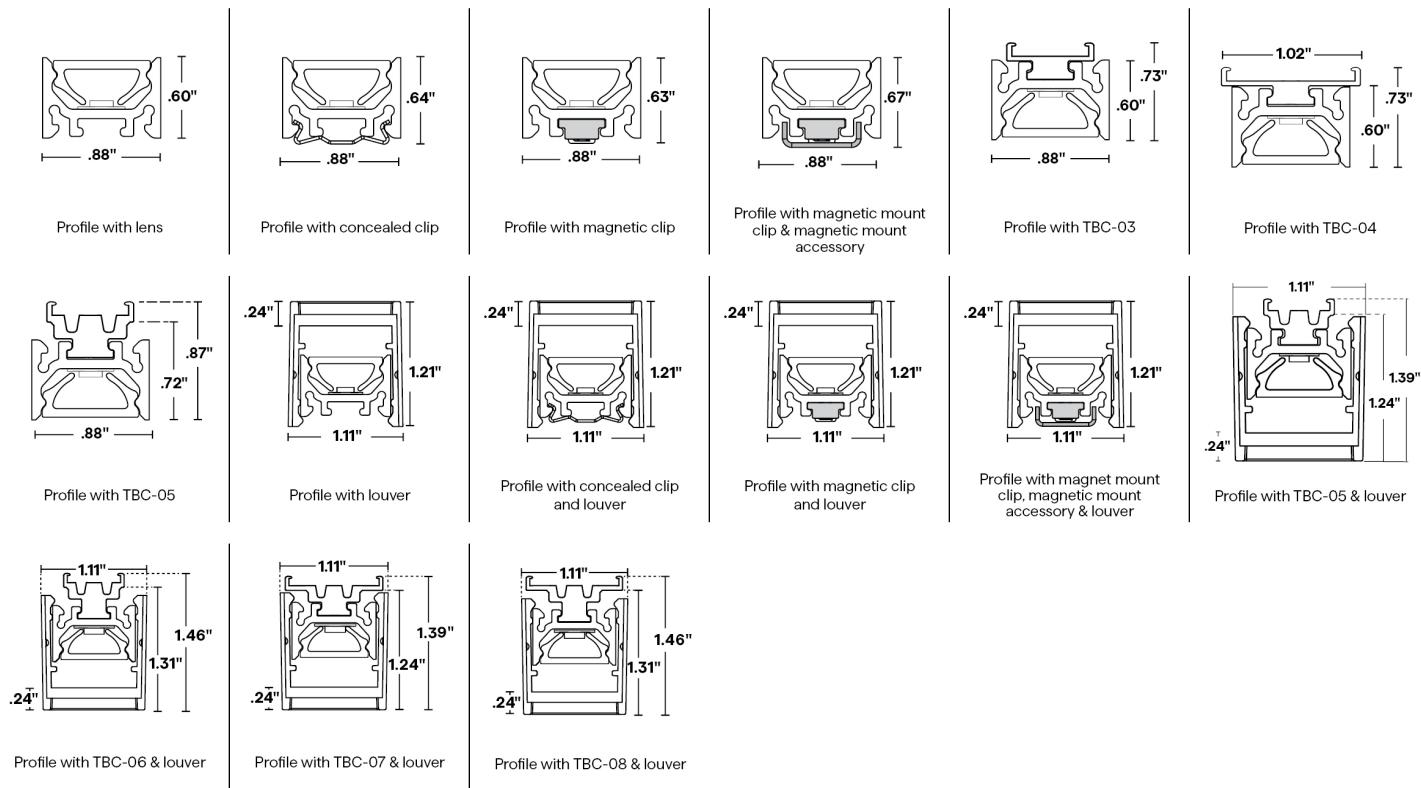

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-02-WD-**-30-DRY

[Calculated L70 = 70000 hrs]
Tested with VERS-02-DW-**-30-DRY

	6.0 W/FT	
	LM/FT	CRI
PR	483	97
DF	447	97

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
PR	154	98	248	98	381	98
DF	148	98	234	98	358	98

5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.





VERS-FLUSH (02) FOR WARM DIM APPLICATIONS




24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS

		WD 6.0 W/FT		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT		DW 4.0 HE W/FT		DW 8.0 HE W/FT	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F




6 EXTERNAL LOUVER

PLASTIC

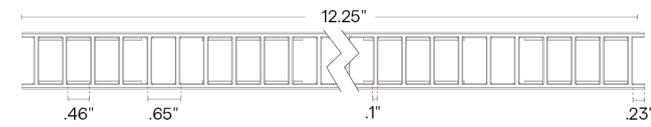

Lumen Multiplier
WH BK
0.70 0.54


METAL

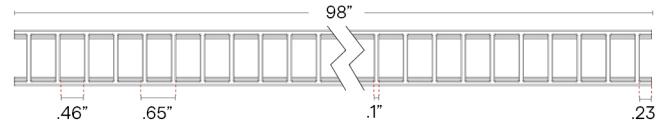


Lumen Multiplier
WH BK ST
0.64 0.39 0.59

7 WIRE INPUT/OUTPUT

SINGLE (Input only)



PASS THROUGH (Input/Output)






VERS-FLUSH (02) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

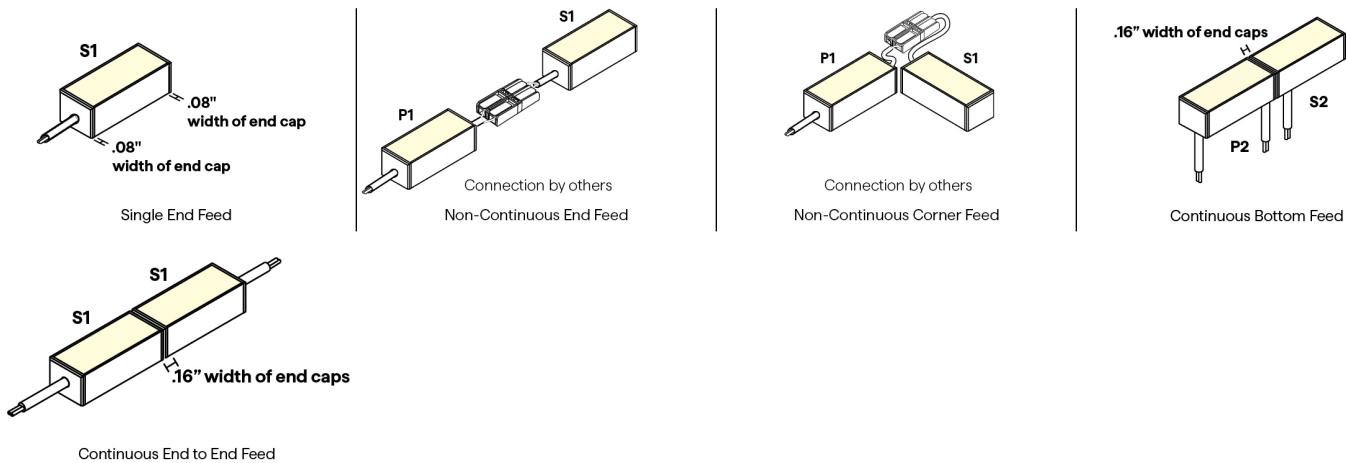

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product.

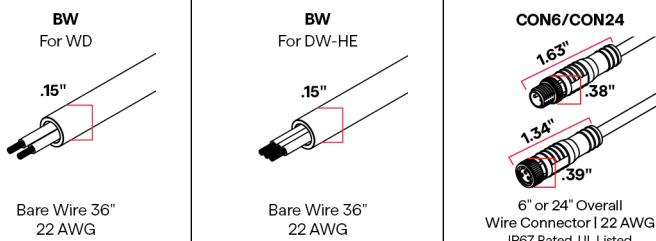

10 WIRE COLOR



12 MOUNTING

CC (CC-01)	CC (CC-02)	MG	MMA-02	TBC-03
 .18" x .7" x 1.25" Concealed Clip 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-01 (sold in pairs) Each clips comes with a #4 x 5/8" Flat Head screw.	 .21" x .7" x 1.25" Louver Concealed Clip Required if L1 or L2 Louver is selected 2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4' To order separately use CC-02 (sold in pairs) Each clips comes with a #4 x 5/8" Flat Head screw.	 .35" x 3.13" x 1.15" Magnet Clip One MG provided per foot To order separately use MG-02	 .64" x .58" x 1.86" x 12" Magnet Mount Accessory for MG-02 Sold separately, to order use MMA-02 Each clip comes with a #6 Flat Screw Required when mounting to a non-magnetic surface	 .64" x .27" x 50" Plastic T-Bar Clip Use on 9/16" Flat Drop Ceiling 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture. To order separately use TBC-03 Each pair of clips comes with M2.5 x 4mm set screw and Allen key




VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

TBC-04	TBC-05	TBC-06	TBC-07	TBC-08
Plastic T-Bar Clip				
Use on 15/16" Flat or Tegular Drop Ceiling	Use on 9/16" Tegular Drop Ceiling	Use with Louver on 9/16" Tegular Drop Ceiling	Use with Louver on 15/16" Flat Drop Ceiling	Use with Louver on 15/16" Tegular Drop Ceiling
2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.	2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1T-Bar Mounting Jig included with each fixture.
To order separately use TBC-04	To order separately use TBC-05	To order separately use TBC-06	To order separately use TBC-07	To order separately use TBC-08
Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key	Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH




Satin
Black
Bronze
White

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

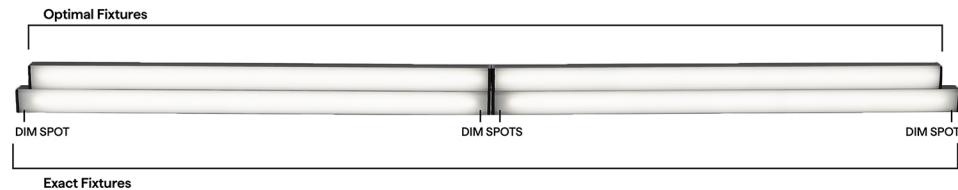



VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

WD DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.49"		10.74"	
13"	12.49"		12.74"	
14"	12.49"		12.74"	
15"	14.49"		14.74"	
16"	14.49"		14.74"	
17"	16.49"		16.74"	
18"	16.49"		16.74"	
19"	18.49"		18.74"	
20"	18.49"		18.74"	
21"	20.49"		20.74"	
22"	20.49"		20.74"	
23"	22.49"		22.74"	
24"	22.49"		22.74"	
36"	34.49"		34.74"	
48"	46.49"		46.74"	
60"	58.49"		58.74"	
72"	70.49"		70.74"	
84"	82.49"		82.74"	
96"	94.49"		94.74"	

DW-HE DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1 End Feed	S2 Bottom Feed	P1 End Feed	P2 Bottom Feed
12"	10.59"		10.94"	
13"	12.59"		12.94"	
14"	12.59"		12.94"	
15"	14.59"		14.94"	
16"	14.59"		14.94"	
17"	16.59"		16.94"	
18"	16.59"		16.94"	
19"	18.59"		18.94"	
20"	18.59"		18.94"	
21"	20.59"		20.94"	
22"	20.59"		20.94"	
23"	22.59"		22.94"	
24"	22.59"		22.94"	
36"	34.59"		34.94"	
48"	46.59"		46.94"	
60"	58.59"		58.94"	
72"	70.59"		70.94"	
84"	82.59"		82.94"	
96"	94.59"		94.94"	



VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	
	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle

DIMMING PROTOCOL	INDOOR	
	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN
ECO System		QTM-eLED(E)
DMX If using DW LED, wattage must be doubled		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle



VERS-FLUSH (02) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M 1.41" 1.71"	HINGE - HMB-L 1.46" 1.29" 1.46"	HINGE - HMB-XL 4" 1.46"	Q-PIVOT 75" 1.03"	Q-ANGLE 1.38" 2.23"	NJ-LARGE 	NU-LARGE 	SD-J-LARGE 	BL-LARGE Backwards L Mounting Bracket	NL-LARGE L Mounting Bracket
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory	J Mounting Bracket	U Mounting Bracket	J Mounting Bracket		
SD-L-LARGE L Mounting Bracket	MMA-02 Magnet Mount Accessory for MG-02 1.86" .64" 12" .58"								

COMPATIBLE WIRING ACCESSORIES

Q-mini-J 2" 1.25"	Q-mini-J5 2.80" 2.27"
UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE 1.36" 2.58"
Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP Q-NFC
Read and write DMX addresses and adjust voltage