



VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed



- Utilizes an extruded lens that sits proud of the fixture for maximum variations of LED sources
- The high-quality lens provides a delicate glow at the edges of the fixture, creating a slim line of light
- Integrated metal endcaps combined with an extruded aluminum housing give this fixture a polished modern look
- White Optics, an internal coating that results in greater lumen output, comes standard in all VERS fixtures.
- Consult factory for field assembly options
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Optional external louver accessory available in white or black for added glare control

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

| 1 | 2 | 3 | 4 | 5 | 6 |
|------------|----------|-----|-------|------|-----------------|
| PRODUCT | WATTS/FT | CCT | RATED | LENS | EXTERNAL LOUVER |
| VERS-01-SW | | | | | |

| ADDITIONAL INFORMATION REQUIRED TO ORDER | | | | | | | | | | | | | | |
|--|-------------------|--------------------|------------|-----------|----------|--------|-------------|---------------|--|--|--|--|--|--|
| 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | | | | | | |
| WIRE INPUT/OUTPUT | CONNECTOR/WIRE IN | CONNECTOR/WIRE OUT | WIRE COLOR | WIRE TYPE | MOUNTING | FINISH | LENGTH (IN) | EXACT/OPTIMAL | | | | | | |
| | | | | | | | | | | | | | | |

Sample Part Number: VERS-01-SW-5.0-30-DRY-DF-L1-BK-P1-BW-BW-BK-CL2-CC-BK-48"-E

| | | | | | |
|--|---|--|--|---|--|
| 1 PRODUCT VERS-01-SW See following pages for compatible power supplies. | 2 WATTS/FT 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft 1.5HE 1.5W/ft HE 3.0HE 3.0W/ft HE 6.0HE 6.0W/ft HE 1.5 1.5W/ft 3.0 3.0W/ft 4.0 4.0W/ft 5.0 5.0W/ft | 3 CCT 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 20 2000K 22 2200K 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K | 4 RATED DRY IP20 DMP IP54 WET IP67 Can be suitable for exterior use, contact factory for more information | 5 LENS DF Diffused PR Polar FR Frosted For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. See VERS-04 for additional 25° lens option. | 6 EXTERNAL LOUVER L1-WH White Plastic L1-BK Black Plastic L2-ST Satin Anodized Aluminum L2-BK Black Anodized Aluminum L2-WH White Powder Coated Aluminum N/A No Louver Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length. Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length. White and custom painted finishes are not compatible with L2 external louvers. |
| 7 WIRE INPUT/OUTPUT SINGLE (Input only) S1 End Feed S2 Bottom Feed S3 Left Side Feed S4 Right Side Feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details. | 8 CONNECTOR/WIRE IN BW Bare Wire (Standard 36") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48) | 9 CONNECTOR/WIRE OUT CLS Closed End (No feed) | 10 WIRE COLOR WH White BK Black | | |
| 11 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW) | 12 MOUNTING CC Concealed Clip MG Magnet TBC-03 9/16" Flat TB-Grid TBC-04 15/16" Flat or Tegular TB-Grid TBC-05 9/16" Tegular TB-Grid or 9/16" Flat TB-Grid, with External Louver TBC-06 9/16" Tegular TB-Grid, with External Louver TBC-07 15/16" Flat TB-Grid, with External Louver TBC-08 15/16" Tegular TB-Grid, with External Louver | 13 FINISH ST Satin BK Black BZ Bronze WH White CU Custom White and custom painted finishes are not compatible with external louvers. Custom finishes require a longer lead time, consult factory. | 14 LENGTH (IN) Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12". | 15 EXACT/OPTIMAL O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts. | |


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance | Suitable for installation in the storage area of a clothes closet when using wattage of 4.0W/ft or less



VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

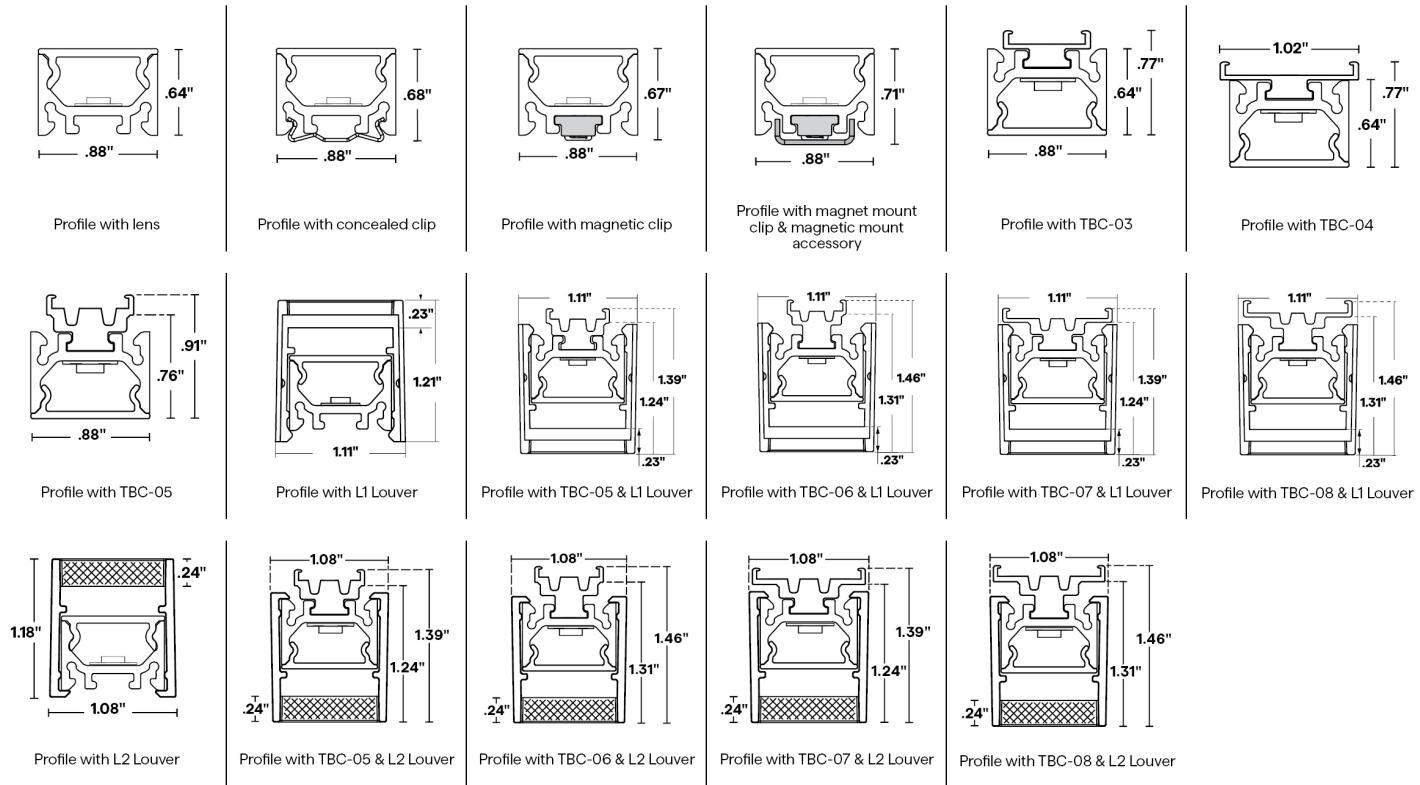

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs, L70 = 66000 hrs for HE]
Tested with VERS-01-SW-**-30-DRY

| | 1.5 W/FT | 1.5HE W/FT | 3.0 W/FT | 3.0HE W/FT | 4.0 W/FT | 5.0 W/FT | 6.0HE W/FT | 9.0HE W/FT |
|----|----------|------------|----------|------------|----------|----------|------------|------------|
| | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI | LM/FT | CRI |
| FR | 156 | 98 | 197 | 98 | 270 | 98 | 374 | 98 |
| PR | 152 | 98 | 190 | 98 | 261 | 98 | 360 | 98 |
| DF | 138 | 97 | 172 | 98 | 240 | 98 | 326 | 98 |
| | | | | | 310 | 98 | 370 | 98 |
| | | | | | 98 | | 616 | 98 |
| | | | | | | 370 | 874 | 98 |

5 DIODE VISIBILITY




DF - Diffused lens

PR - Polar lens

FR - Frosted lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

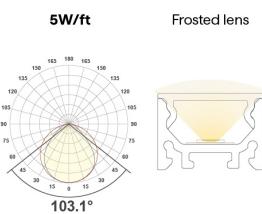



VERS-PROUD (01) STATIC WHITE


24VDC Linear Fixtures - Surface & Recessed

TEMPERATURE RATINGS


| | | 15 W/FT | | 1.5 HE W/FT | | 3.0 W/FT | | 3.0 HE W/FT | | 4.0 W/FT | | 5.0 W/FT | | 6.0 HE W/FT | | 9.0 HE W/FT | |
|-----|----------------------------------|---------|-------|-------------|-------|----------|-------|-------------|-------|----------|-------|----------|-------|-------------|-------|-------------|-------|
| | | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| DRY | Ambient Operating Temp - Surface | -4°F | 140°F | -4°F | 145°F | -4°F | 130°F | -4°F | 135°F | -4°F | 125°F | -4°F | 120°F | -4°F | 120°F | -4°F | 100°F |
| DMP | Ambient Operating Temp - Surface | -4°F | 135°F | -4°F | 140°F | -4°F | 125°F | -4°F | 130°F | -4°F | 120°F | -4°F | 115°F | -4°F | 115°F | -13°F | 95°F |
| WET | Ambient Operating Temp - Surface | -4°F | 135°F | — | — | -4°F | 125°F | — | — | -4°F | 120°F | -4°F | 115°F | — | — | — | — |

6 EXTERNAL LOUVER

PLASTIC

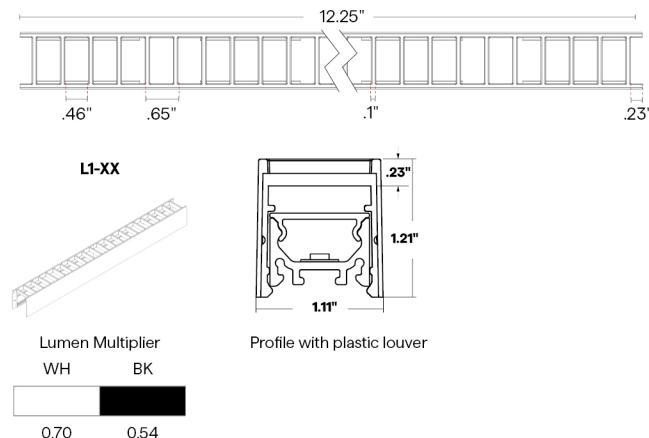


METAL

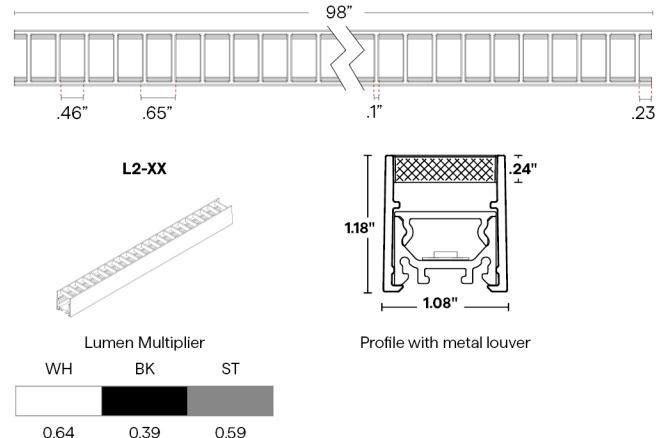


7 WIRE INPUT/OUTPUT

SINGLE (Input only)

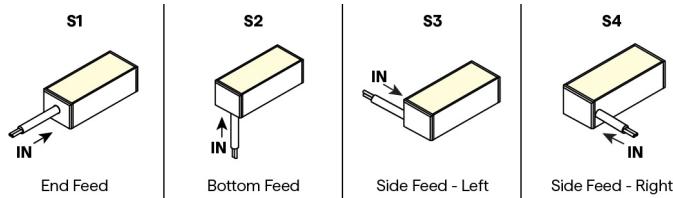

PASS THROUGH (Input/Output)

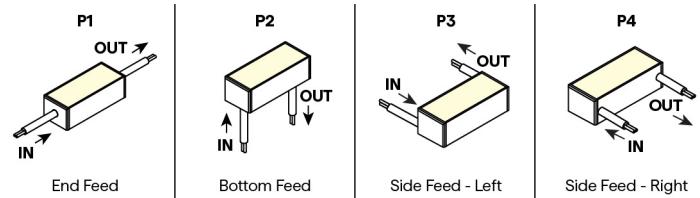




VERS-PROUD (01) STATIC WHITE



24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

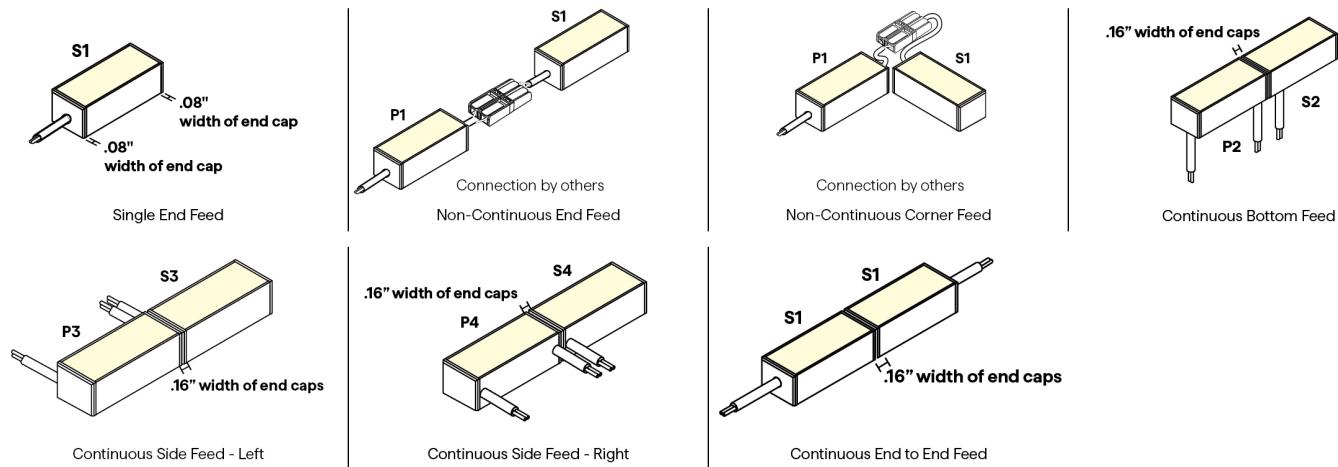

8 / 9 CONNECTOR/WIRE – IN/OUT






Connector/Wire In or Out not needed to specify product.

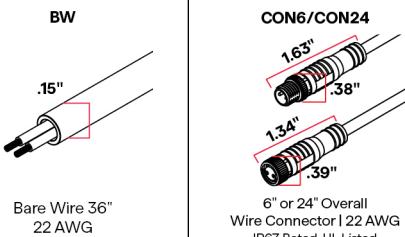

10 WIRE COLOR



12 MOUNTING

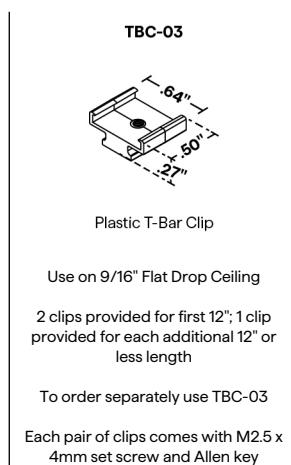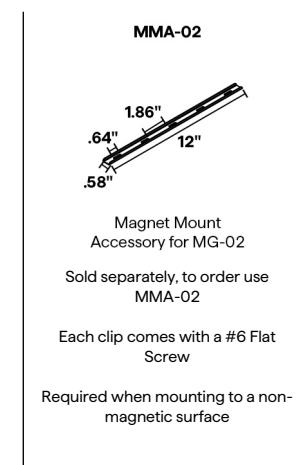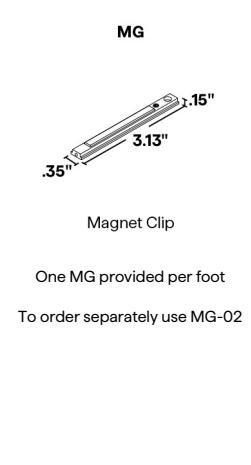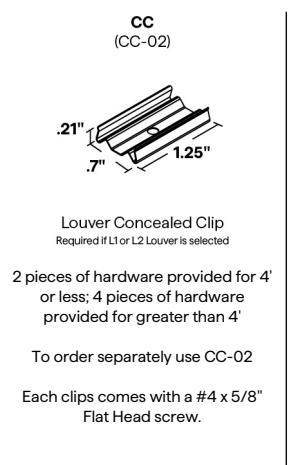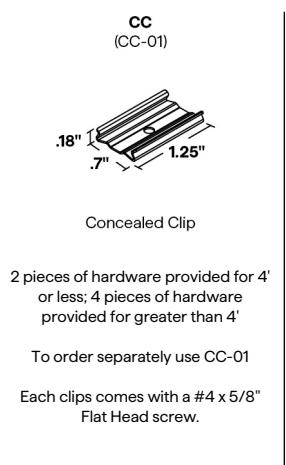




VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

MOUNTING CONTINUED

| TBC-04 | TBC-05 | TBC-06 | TBC-07 | TBC-08 |
|--|--|--|--|--|
| | | | | |
| Plastic T-Bar Clip |
| Use on 15/16" Flat or Tegular Drop Ceiling | Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling | Use with Louver on 9/16" Tegular Drop Ceiling | Use with Louver on 15/16" Flat Drop Ceiling | Use with Louver on 15/16" Tegular Drop Ceiling |
| 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length | 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length | 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length | 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length | 2 clips provided for first 12"; 1 clip provided for each additional 12" or less length |
| To order separately use TBC-04 | To order separately use TBC-05 | To order separately use TBC-06 | To order separately use TBC-07 | To order separately use TBC-08 |
| Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Each pair of clips comes with M2.5 x 4mm set screw and Allen key | Each pair of clips comes with M2.5 x 4mm set screw and Allen key |

13 FINISH




Satin
Black
Bronze
White

Custom color available

15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

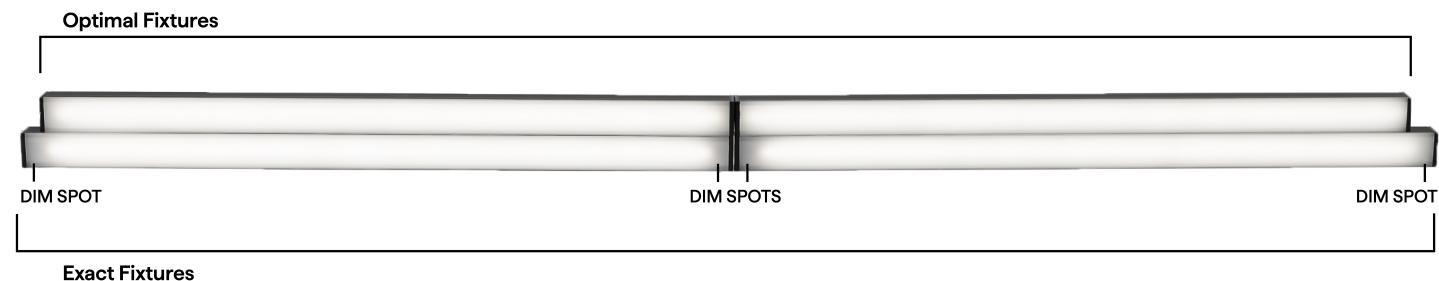



VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|--------------------------|----------------|-------------------|----------------|-------------------|------------------------|-------------------------|------------------------|-------------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed | S3 Side Feed - Left | S4 Side Feed - Right | P3 Side Feed - Left | P4 Side Feed - Right |
| 12" | 11.49" | | 11.74" | | 11.34" | | 11.44" | |
| 13" | 12.49" | | 12.74" | | 12.34" | | 12.44" | |
| 14" | 13.49" | | 13.74" | | 13.34" | | 13.44" | |
| 15" | 14.49" | | 14.74" | | 14.34" | | 14.44" | |
| 16" | 15.49" | | 15.74" | | 15.34" | | 15.44" | |
| 17" | 16.49" | | 16.74" | | 16.34" | | 16.44" | |
| 18" | 17.49" | | 17.74" | | 17.34" | | 17.44" | |
| 19" | 18.49" | | 18.74" | | 18.34" | | 18.44" | |
| 20" | 19.49" | | 19.74" | | 19.34" | | 19.44" | |
| 21" | 20.49" | | 20.74" | | 20.34" | | 20.44" | |
| 22" | 21.49" | | 21.74" | | 21.34" | | 21.44" | |
| 23" | 22.49" | | 22.74" | | 22.34" | | 22.44" | |
| 24" | 23.49" | | 23.74" | | 23.34" | | 23.44" | |
| 36" | 35.49" | | 35.74" | | 35.34" | | 35.44" | |
| 48" | 47.49" | | 47.74" | | 47.34" | | 47.44" | |
| 60" | 59.49" | | 59.74" | | 59.34" | | 59.44" | |
| 72" | 71.49" | | 71.74" | | 71.34" | | 71.44" | |
| 84" | 83.49" | | 83.74" | | 83.34" | | 83.44" | |
| 96" | 95.49" | | 95.74" | | 95.34" | | 95.44" | |

SW WET LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | .5" |
| 13" | .5" |
| 14" | .5" |
| 15" | .5" |
| 16" | .5" |
| 17" | .5" |
| 18" | .5" |
| 19" | .5" |
| 20" | .5" |
| 21" | .5" |
| 22" | .5" |
| 23" | .5" |
| 24" | .5" |
| 36" | .5" |
| 48" | .5" |
| 60" | .5" |
| 72" | .5" |
| 84" | .5" |
| 96" | .5" |

OPTIMAL LENGTH

| Requested Nominal Length | S1 & S2 | | P1 & P2 | | S3 & S4 | | P3 & P4 | |
|--------------------------|----------------|-------------------|----------------|-------------------|------------------------|-------------------------|------------------------|-------------------------|
| | S1 End Feed | S2 Bottom Feed | P1 End Feed | P2 Bottom Feed | S3 Side Feed - Left | S4 Side Feed - Right | P3 Side Feed - Left | P4 Side Feed - Right |
| 12" | 11.64" | | 11.79" | | 11.54" | | 11.64" | |
| 13" | 12.64" | | 12.79" | | 12.54" | | 12.64" | |
| 14" | 13.64" | | 13.79" | | 13.54" | | 13.64" | |
| 15" | 14.64" | | 14.79" | | 14.54" | | 14.64" | |
| 16" | 15.64" | | 15.79" | | 15.54" | | 15.64" | |
| 17" | 16.64" | | 16.79" | | 16.54" | | 16.64" | |
| 18" | 17.64" | | 17.79" | | 17.54" | | 17.64" | |
| 19" | 18.64" | | 18.79" | | 18.54" | | 18.64" | |
| 20" | 19.64" | | 19.79" | | 19.54" | | 19.64" | |
| 21" | 20.64" | | 20.79" | | 20.54" | | 20.64" | |
| 22" | 21.64" | | 21.79" | | 21.54" | | 21.64" | |
| 23" | 22.64" | | 22.79" | | 22.54" | | 22.64" | |
| 24" | 23.64" | | 23.79" | | 23.54" | | 23.64" | |
| 36" | 35.64" | | 35.79" | | 35.54" | | 35.64" | |
| 48" | 47.64" | | 47.79" | | 47.54" | | 47.64" | |
| 60" | 59.64" | | 59.79" | | 59.54" | | 59.64" | |
| 72" | 71.64" | | 71.79" | | 71.54" | | 71.64" | |
| 84" | 83.64" | | 83.79" | | 83.54" | | 83.64" | |
| 96" | 95.64" | | 95.79" | | 95.54" | | 95.64" | |



VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

SW-HE DRY, DMP LENGTHS BY INCH

Available in any length in between 12" and 98" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is $+0 - 1/8"$. Consult factory for lengths under 12".

EXACT LENGTH

| Requested Length | Potential dim spot on either end of fixture |
|------------------|---|
| 12" | 1" |
| 13" | 0.5" |
| 14" | 1" |
| 15" | 0.5" |
| 16" | 1" |
| 17" | 0.5" |
| 18" | 1" |
| 19" | 0.5" |
| 20" | 1" |
| 21" | 0.5" |
| 22" | 1" |
| 23" | 0.5" |
| 24" | 1" |
| 36" | 1" |
| 48" | 1" |
| 60" | 1" |
| 72" | 1" |
| 84" | 1" |
| 96" | 1" |

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

| Requested Nominal Length | S1 & S2 | P1 & P2 | S3 & S4 | P3 & P4 |
|--------------------------|---------|---------|---------|---------|
| 12" | | | | |
| 13" | 10.49" | 12.74" | 12.34" | 12.44" |
| 14" | 12.49" | 12.74" | 12.34" | 12.44" |
| 15" | 14.49" | 14.74" | 14.34" | 14.44" |
| 16" | 14.49" | 14.74" | 14.34" | 14.44" |
| 17" | 16.49" | 16.74" | 16.34" | 16.44" |
| 18" | 16.49" | 16.74" | 16.34" | 16.44" |
| 19" | 18.49" | 18.74" | 18.34" | 18.44" |
| 20" | 18.49" | 18.74" | 18.34" | 18.44" |
| 21" | 20.49" | 20.74" | 20.34" | 20.44" |
| 22" | 20.49" | 20.74" | 20.34" | 20.44" |
| 23" | 22.49" | 22.74" | 22.34" | 22.44" |
| 24" | 22.49" | 22.74" | 22.34" | 22.44" |
| 36" | 34.49" | 34.74" | 34.34" | 34.44" |
| 48" | 46.49" | 46.74" | 46.34" | 46.44" |
| 60" | 58.49" | 58.74" | 58.34" | 58.44" |
| 72" | 70.49" | 70.74" | 70.34" | 70.44" |
| 84" | 82.49" | 82.74" | 82.34" | 82.44" |
| 96" | 94.49" | 94.74" | 94.34" | 94.44" |

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has $+/- 5\%$ tolerance.

| DIM TO LEVEL | INDOOR | | OUTDOOR | |
|--------------|--|--|---|---|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Dim to Black | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QTM-DC+CAP iQ-PH iQ-PH+QD1 | QOM-DC+CAP QOM-PH | QOM-DC+CAP QOM-PH |
| 0.1% | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V | Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V |
| 1% | QTM-eLED(E) QZ-DALI-DT6 | QTM-eLED(E) QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 |
| 10% | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | Q-HEX-mini-DC Q-SET-mLED | |



VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

| DIMMING PROTOCOL | INDOOR | | OUTDOOR | |
|------------------|--|--|---|--|
| | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ | SW24/1.5-4.0 | SW24/5.0, SW-HE, SW-HE+ |
| Non-Dim | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | QT-CAB-eLED-ND QTM-eLED-ND QZ-ND | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 | Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND iQ-ND-50-65 |
| Phase | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH iQ-PH+QD1 | Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V | Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V |
| 0-10V | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V | Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V |
| Lutron Athena | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN | | |
| ECO System | QTM-eLED(E) | QTM-eLED(E) | | |
| DMX | QZ-DMX | QZ-DMX | Q-SET-QZ-DMX QZ-DMX | Q-SET-QZ-DMX QZ-DMX |
| DALI-2: DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 | Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 |
| SCENE App Dimmed | Non-Dim Power Supply with SW App Dongle | Non-Dim Power Supply with SW App Dongle | | |

COMPATIBLE MOUNTING ACCESSORIES

| | | | | | | | | | |
|--------------------------------------|-------------------------------------|--------------------------------------|------------------------------|-------------------------------|---------------------|---------------------|-----------------------|------------------------------|---------------------|
| HINGE - HMB-M 1.41" .71" | HINGE - HMB-L 1.46" 1.29" | HINGE - HMB-XL 1.46" 4" | Q-PIVOT .75" 1.03" | Q-ANGLE 1.38" 2.23" | NJ-LARGE | NU-LARGE | SD-J-LARGE | BL-LARGE | NL-LARGE |
| Adjustable mounting bracket - Medium | Adjustable mounting bracket - Large | Adjustable mounting bracket - XLarge | Small mounting accessory | Adjustable mounting accessory | J Mounting Bracket | U Mounting Bracket | J Mounting Bracket | Backwards L Mounting Bracket | L Mounting Bracket |

SD-L-LARGE



L Mounting Bracket



VERS-PROUD (01) STATIC WHITE

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE WIRING ACCESSORIES



COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage