




# Q-CAP WURM™ STATIC WHITE

## 24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Both helical bend and up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Two mounting options available
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

1 PRODUCT	2 MOUNTING	3 RATED	4 CCT	5 WATTAGE	6 LENS	7 WIRE INPUT/ OUTPUT	8 CONNECTOR/WIRE IN	9 CONNECTOR/WIRE OUT	10 END CAPS	11 LENGTH
						S1		N/A	WH	48"

Sample Part Number: **WURM-SW-WSCS-DRY-30-5.0-ENC/TL-P1-BW-BW-N/A-48"-E**

<b>1 PRODUCT</b>  <b>WURM-SW</b> <b>WURM-SW-USA</b>  Select USA option for BA, BAA and BABA projects.  See last page for compatible power supplies.	<b>2 MOUNTING</b>  <b>MCS</b> <b>WSCS</b> <b>BN-UD-SST-16'</b> <b>BN-UD-SST-32'</b> <b>BN-UD-WH-16'</b> <b>BN-UD-WH-32'</b>  Magnetic Clip Small White Snug Clip Small 16' BENDIT Up/Down Stainless Steel Channel 32' BENDIT Up/Down Stainless Steel Channel 16' BENDIT Up/Down White Channel 32' BENDIT Up/Down White Channel  White snug clip only for indirect cove use, not intended for hanging fixtures upside down.	<b>3 RATED</b>  <b>DRY</b> IP20 <b>WET</b> IP67	<b>4 CCT</b>  <b>24</b> 2400K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K
<b>5 WATTAGE</b>  <b>1.5</b> 1.5W-SO <b>3.0</b> 3.0W-HO <b>5.0</b> 5.0W-VHO  SO: Standard Output HO: High Output VHO: Very High Output	<b>6 LENS</b>  <b>ENC/CL</b> Encapsulated in Clear <b>ENC/TL</b> Encapsulated in Translucent  For representation of LED visibility, see Diode Visibility section on following pages	<b>7 WIRE INPUT/OUTPUT</b>  <b>S1</b> Single 1 (Input only) - End Feed	
<b>8 CONNECTOR/WIRE IN</b>  <b>BW</b> Bare Wire (Standard 24") <b>BR</b> Barrel <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	<b>9 CONNECTOR/WIRE OUT</b>  <b>N/A</b> Closed End (No feed)	<b>10 END CAPS</b>  <b>WH</b> White	<b>11 LENGTH</b>  <b>48"</b> Optimal  Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". SW: Available in 1" increments. SW-HE: Available in 2" increments.


5 year warranty | Up/Down & Helical Bend | Data subject to change, all data has +/- 5% tolerance | Ambient or mounting surface must not be lower than -4°F or higher than: SO - 125°F; HO - 115°F; VHO - 108°F | Patent # D846,786 S, 10,619,828 B2 | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



# Q-CAP WURM™ STATIC WHITE


## 24VDC Flexible Fixtures

### 1 PRODUCT - DIMENSIONS




Profile  
(Standard)

### BEND RADIUS

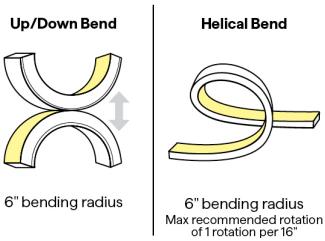

### FLEXIBILITY

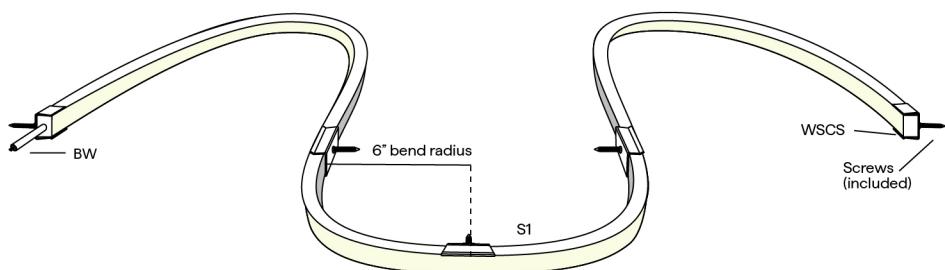


### 2 MOUNTING



White Snug Clip Small  
Indirect uplight

To order separately use WSCS


Each clip comes with a #6x5/8" flat  
screw



Magnetic Clip Small  
Cove use only

To order separately use MCS

each clip comes with a #6x1 1/4"  
screw



BENDIT Channel  
Vertical Stainless Steel  
Flexible Channel

Continuous mounting solution for  
flexible fixtures, 16' or 32' field  
cuttable lengths

To order separately use either  
STND-QCAP-BN-UD-S-SST-16',  
STND-QCAP-BN-UD-S-SST-32',  
STND-QCAP-BN-UD-S-WH-16', or  
STND-QCAP-BN-UD-S-WH-32'

64 #4-40 1/2" screws provided per  
16'



# Q-CAP WURM™ STATIC WHITE

24VDC Flexible Fixtures

## 4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with WURM-SW-WSCS-DRY

CCT	1.5W/FT		1.5HE W/FT		3.0W/FT		3.0HE W/FT		5.0W/FT		6.0HE W/FT	
	ENC/CL		ENC/CL		ENC/CL		ENC/CL		ENC/CL		ENC/CL	
	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI	LM	CRI
2400K	127	94	184	93	231	93	336	93	329	94	584	93
2700K	127	97	174	95	227	98	331	95	329	98	569	96
3000K	135	99	172	96	242	98	345	96	337	98	602	96
3500K	144	96	201	98	242	96	368	98	359	97	648	98
4000K	151	96	187	96	262	96	378	97	370	97	652	97

## TEMPERATURE RATINGS


	1.5 W/FT		1.5 HE W/FT		3.0 W/FT		3.0 HE W/FT		5.0 W/FT		6.0 HE W/FT	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	140°F	-4°F	120°F	-4°F	120°F	-4°F	105°F	-4°F	100°F
Storage Temp	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F	-4°F	140°F
Installation Temp	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F	50°F	100°F

## BUG RATING

WATTAGE	B	U	G
1.5 (ALL CCTs), 3.0 (ALL CCTs), 5.0 (ALL CCTs)	B0	U1	G0
1.5HE (ALL CCTs), 3.0HE (ALL CCTs)	B0	U1	G0
6.0HE (2400K, 2700K, 3000K, 4000K)	B0	U1	G1
6.0HE (3500K)	B0	U2	G1


## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)



End Feed

PASS THROUGH (Input/Output)




End Feed




# Q-CAP WURM™ STATIC WHITE

## 24VDC Flexible Fixtures


### CONFIGURATION OPTIONS

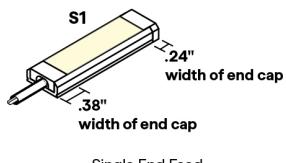


Single End Feed




Connection by others  
Non-Continuous End Feed



Connection by others  
Non-Continuous Corner Feed




Continuous End to End Feed



Standard Fixture

Field Cuttable - Continuous End to End Feed

### FIELD CUTTABLE MARKING

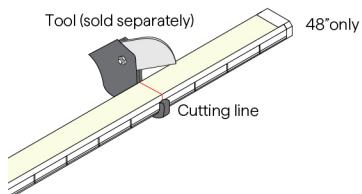

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



**Note:** Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures.  
Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




## Q-CAP WURM™ STATIC WHITE


### 24VDC Flexible Fixtures

#### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps

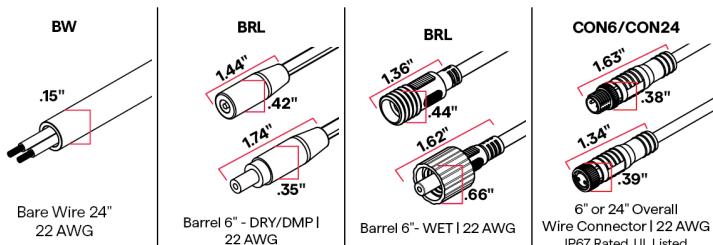


#### 10 END CAPS (NO FEED)



White endcaps  
.11" added at end  
.24" dim spot


#### END CAPS (WITH FEED)




White endcaps  
.0" added at end  
.38" dim spot

#### 11 LENGTH - WIRING DETAIL


1.5W, 3.0W, 5.0W | Available in 1" increments 12"-191"



1.5HEW, 3.0HEW, 6.0HEW | Available in 2" increments 12"-191"



#### 12 EXACT/OPTIMAL FIXTURE LENGTH

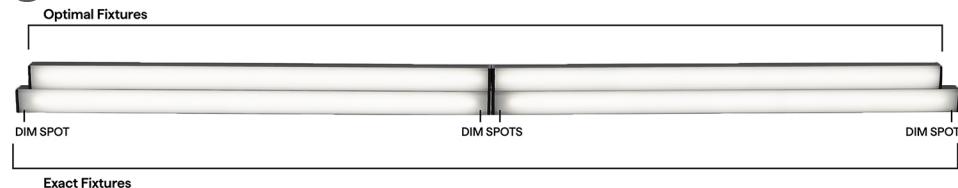

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



# Q-CAP WURM™ STATIC WHITE

## 24VDC Flexible Fixtures

### SW LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	.5"
13"	.5"
14"	.5"
15"	.5"
16"	.5"
17"	.5"
18"	.5"
19"	.5"
20"	.5"
21"	.5"
22"	.5"
23"	.5"
24"	.5"
36"	.5"
48"	.5"
60"	.5"
72"	.5"
84"	.5"
96"	.5"

#### OPTIMAL LENGTH

Requested Nominal Length	S1	P1
12"	11.45"	11.7"
13"	12.45"	12.7"
14"	13.45"	13.7"
15"	14.45"	14.7"
16"	15.45"	15.7"
17"	16.45"	16.7"
18"	17.45"	17.7"
19"	18.45"	18.7"
20"	19.45"	19.7"
21"	20.45"	20.7"
22"	21.45"	21.7"
23"	22.45"	22.7"
24"	23.45"	23.7"
36"	35.45"	35.7"
48"	47.45"	47.7"
60"	59.45"	59.7"
72"	71.45"	71.7"
84"	83.45"	83.7"
96"	95.45"	95.7"

### SW-HE LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 – 1/8". Consult factory for lengths under 12".

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
12"	10.45"	10.70"
13"	12.45"	12.70"
14"	12.45"	12.70"
15"	14.45"	14.70"
16"	14.45"	14.70"
17"	16.45"	16.70"
18"	16.45"	16.70"
19"	18.45"	18.70"
20"	18.45"	18.70"
21"	20.45"	20.70"
22"	20.45"	20.70"
23"	22.45"	22.70"
24"	22.45"	22.70"
36"	34.45"	34.70"
48"	46.45"	46.70"
60"	58.45"	58.70"
72"	70.45"	70.70"
84"	82.45"	82.70"
96"	94.45"	94.70"



# Q-CAP WURM™ STATIC WHITE

## 24VDC Flexible Fixtures

### COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	Q6M-DC+CAP QTM-DC+CAP iQ-PH+QD1	QOM-DC+CAP QOM-PH	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle	Q-HEX-mini-DC Q-SET-mLED	


DIMMING PROTOCOL	INDOOR		OUTDOOR	
	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+	SW24/1.5-4.0	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-HEX-mini-DC Q-SET-QZ-PH/0-10V Q-SET-mLED QOM-DC+CAP QOM-PH QZ-PH/0-10V	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN		
ECO System	QTM-eLED(E)	QTM-eLED(E)		
DMX	QZ-DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	Non-Dim Power Supply with SW App Dongle		




# Q-CAP WURM™ STATIC WHITE

## 24VDC Flexible Fixtures

### COMPATIBLE MOUNTING ACCESSORIES

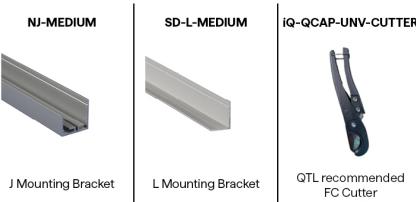

### COMPATIBLE WIRING ACCESSORIES

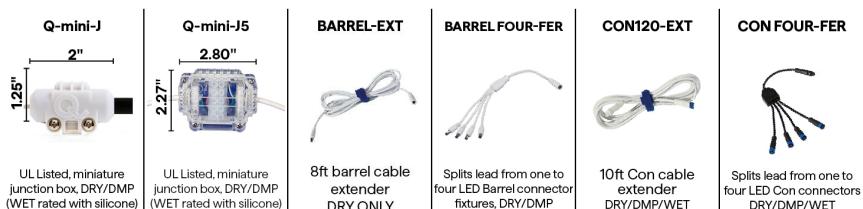

### COMPATIBLE CONTROL ACCESSORIES

#### SCENE APP DONGLE



Wi-Fi or Bluetooth  
Connectivity

### COMPATIBLE APPS

#### NFC APP



Read and write  
DMX addresses and  
adjust voltage