





# WA-7

12V MR16 35W Halogen/8W LED Dual Wall Mount

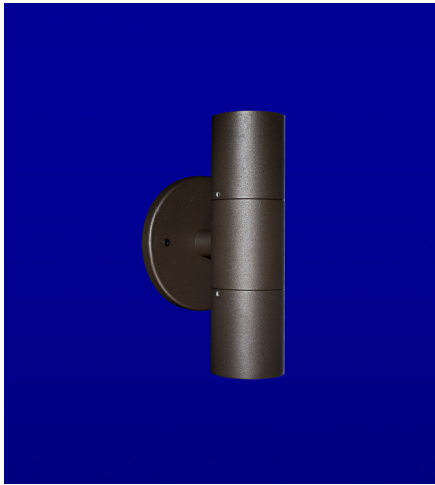

WA-7 Shown in Bronze Texture Powder Coat Finish (BZT)

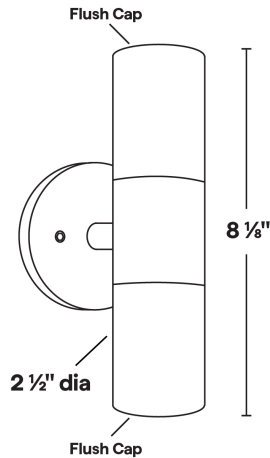

Dimensions: 2 1/2" dia. x 8 1/8"

- Two Flush lens caps; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10" 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen(x2)/8W LED (x2)
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for wall mounted fixed downlighting and uplighting applications.

1	2	3	4
PRODUCT	MATERIAL	MOUNTING PLATE	FINISH
WA-7	A		

Sample Part Number: **WA-7-A-1-BK**

1	2	3	4
PRODUCT	MATERIAL	MOUNTING PLATE	FINISH
WA-7	A Aluminum	1 4/0 Round Mounting Plate 2 4/0 Square Mounting Plate 3 3/0 Round Mounting Plate	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



# WA-7

12V MR16 35W Halogen/8W LED Dual Wall Mount

## 1 PRODUCT - DIMENSIONS

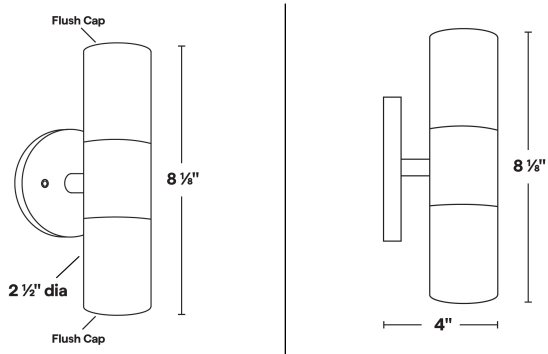

## 2 MATERIAL



Aluminum


## 3 MOUNTING PLATE

Three mounting plate options



## 4 FINISH

Eight Standard TGIC Free powder coat finishes

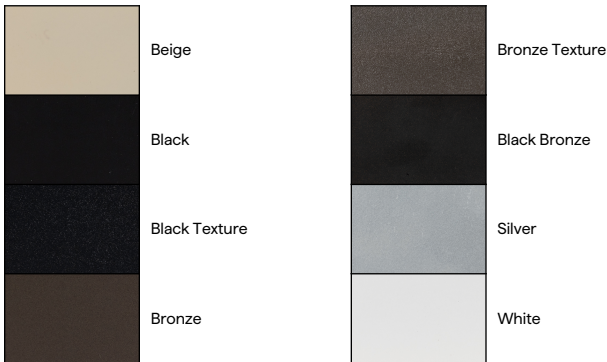











# WA-7

12V MR16 35W Halogen/8W LED Dual Wall Mount







## ACCESSORIES - COLOR FILTERS

Holds up to three accessories. Wire Filter Holder is included for each color filter to hold filter in place.

<b>BL</b>  Blue Glass Filter To order separately use AY-2-MR-16-BL	<b>LB</b>  Light Blue Glass Filter To order separately use AY-2-MR-16-LB	<b>PK</b>  Pink Glass Filter To order separately use AY-2-MR-16-PK	<b>AM</b>  Amber Glass Filter To order separately use AY-2-MR-16-AM	<b>MV</b>  Mercury Vapor Glass Filter To order separately use AY-2-MR-16-MV	<b>RD</b>  Red Glass Filter To order separately use AY-2-MR-16-RD	<b>GR</b>  Green Glass Filter To order separately use AY-2-MR-16-GR	<b>DA</b>  Dichroic Amber Glass Filter To order separately use AY-2-MR16-DA
---	---	---	--	--	--	--	--



## ACCESSORIES - LENS

Holds up to three accessories

<b>SP</b>  Spread Lens To order separately use AY-1-MR16-1	<b>LI</b>  Linear Lens To order separately use AY-1-MR16-2	<b>SO</b>  Softening Lens To order separately use AY-1-MR16-3	<b>LV</b>  Louver Lens To order separately use AY-1-MR16-4	<b>WI</b>  Wire Holder To order separately use AY-1-MR16-5	<b>FR</b>  Frosted Lens To order separately use AY-1-MR16-6
---	---	--	---	---	--

## LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain  
Maximum wattage: 35W Halogen(x2)/8W LED(x2)

<b>MR16</b>  EMERY ALLEN 1.0W, 3.0W, 5.0W, 7.0W	<b>MR16</b>  EMERY ALLEN 3W AMBER
--	---

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS