




RL-5
12V MR16 35W Halogen/8W LED Pendant
Light

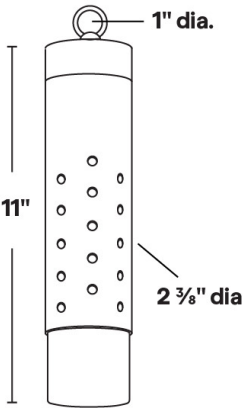

- 1" brass loop for mounting. Hanging hook included.
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 12" of 18 ga. wire leads.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Molded silicone wire pass-thru attached to socket wire prevents wicking and water leaking into the lamp compartment.
- Maximum Wattage: 35W Halogen/8W LED
- Input Voltage: 12V (remote transformer required)
- Socket: GU5.3 Bi-Pin Porcelain
- Wet Listed
- Specification-grade, wet-location landscape luminaire for pendant mounted downlighting applications. Can be utilized for pergola, tree-mounted, and other exterior installations.

RL-5 Shown in Bronze Texture Powder Coat Finish (BZT)

Dimensions: 2 3/8" dia. x 11"

1	2	3	4	5
PRODUCT	MATERIAL	SS CABLE	18/ 2 WIRE	FINISH
RL-5	A			

Sample Part Number: RL-5-A-0-0-BK

1	2	3	4	5
PRODUCT	MATERIAL	SS CABLE	18/2 WIRE	FINISH
RL-5	A Aluminum	0 No SS Cable 5 5' SS Cable 10 10' SS Cable 15 15' SS Cable 20 20' SS Cable 25 25' SS Cable 30 30' SS Cable	0 Standard 12" Wire 5 Extra 5' Wire 10 Extra 10' Wire 15 Extra 15' Wire 20 Extra 20' Wire 25 Extra 25' Wire 30 Extra 30' Wire <small>12" wire is standard. Length selected will be added to the standard 12" wire length.</small>	BG Beige BB Black Bronze BK Black BKT Black Texture BZ Bronze BZT Bronze Texture SL Silver WH White


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



RL-5

12V MR16 35W Halogen/8W LED Pendant Light

1 PRODUCT - DIMENSIONS

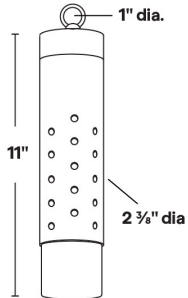

2 MATERIAL



Aluminum

5 FINISH

Eight Standard TGIC Free powder coat finishes



Beige

Black

Black Texture

Bronze



Bronze Texture

Black Bronze

Silver

White

LAMPS

MR16 Halogen or LED; GU5.3 Bi Pin Porcelain
Maximum wattage: 35W Halogen/8W LED

MR16



EMERY ALLEN
1.0W, 3.0W, 5.0W,
7.0W

MR16



EMERY ALLEN
3W AMBER



RL-5

12V MR16 35W Halogen/8W LED Pendant Light

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIMMING PROTOCOL	OUTDOOR
	LANDSCAPE LIGHTING
Phase	Q-HEX Q-SET-1 Q-SET-2 Q-SET-3 QOMD QOMS