



SW-HE+24/6.0

LED Strips - Static White High Efficacy Plus



Declare.



- Dry and wet rated with 2" cutpoints
- Field-cutable up to 118"
- Accepted into the 2020 IES Progress Report
- Ambient operating temp: -13-115°F
- Installation temp: 50-100°F | Storage temp: -13-176°F
- Calculated L70 = 55000 hrs

1	2	3	4	5	6	7	8
V/WATTS	RATED	CCT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	ILLUMINATED LENGTH
SW-HE+24/6.0							

Sample Part Number: **SW-HE+24/6.0-DRY-27-BW-CLS-WH-CL2-48"**

1

V/WATTS

SW-HE+24/6.0

Voltage: 24VDC
Wattage: 6.0W/ft
See following pages for compatible power supplies.

2

RATED

DRY

IP20

WET

IP67

3

CCT

27

2700K

30

3000K

35

3500K

40

4000K

4

CONNECTOR/WIRE IN

BW

Bare Wire (Standard 24")

BRL

Barrel

CLS

Closed End (No feed)

CON6

Connector 6"

CON24

Connector 24"

Connector/Wire In not needed to specify product. Typical selection is BW.
BW: Standard length is 24", Max length is 120".
Request custom length by writing in part number next to BW (example: BW48)

5

CONNECTOR/WIRE OUT

BW

Bare Wire (Standard 24")

BRL

Barrel

CLS

Closed End (No feed)

CON6

Connector 6"

CON24

Connector 24"

Connector/Wire Out not needed to specify product. Typical selection is CLS or BW.
BW: Standard length is 24", Max length is 120".
Request custom length by writing in part number next to BW (example: BW48)

6

WIRE COLOR

WH

White

BK

Black

N/A

Specify for Barrel

Barrel is white

7

WIRE TYPE

CL2

Class 2

CL2P

Class 2 Plenum Rated

N/A

Specify for Barrel

CL2P only available with bare wire leads (BW)

8

ILLUMINATED LENGTH

DRY: 2"-118" in 2" increment

WET: 2"-118" in 2" increment

Dry version also available in reel lengths of 16' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.

Available in reel lengths of 16' (Class 2) and 100'. Each reel will have a 2' soldered lead wire attached. Contact factory for larger reels.

COMPATIBLE EXTRUSIONS

	WIDE	ROND	TORQ	TRE3	LALO	TALO	ARKA	TELA	VEVE	FLUR	EMBD	LATO	MDIN	OPTI-FLAT	OPTI-OPTICS	THIN
DRY	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓
DMP																
WET	✓				✓	✓	✓	✓					✓			✓ NO LENS

5 year warranty | Warranty only valid with QTL power supplies | Field modifications must comply with QTL's installation methods otherwise warranty is null & void | All data has +/- 5% tolerance | UL Listed



SW-HE+24/6.0

LED Strips - Static White High Efficacy Plus

3 CCT – LUMENS/CRI - DELIVERED LUMENS

DRY

[Calculated L70 = 55000 hrs]
Tested with SW-HE+24/6.0-DRY

CCT	Lumen/ft	Luminous Efficacy	CRI Ra	CRI R9	TM30 Rf	TM30 Rg
2700K	1091	176 Lm/W	93	62	91	100
3000K	1085	175 Lm/W	92	63	90	101
3500K	1114	186 Lm/W	93	70	90	100
4000K	1145	184 Lm/W	92	59	89	97

WET

[Calculated L70 = 55000 hrs]
Tested with SW-HE+24/6.0-WET

CCT	Lumen/ft	CRI Ra
2700K	908	93
3000K	916	92
3500K	1019	92
4000K	1026	93


TEMPERATURE RATINGS

		Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	115°F
	Storage Temp	-13°F	176°F
	Installation Temp	50°F	100°F

4 / 5 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out


BW



.10"

Bare Wire 24"
Stranded 22 AWG


BRL



1.44"
.42"
1.74"
.35"

Barrel 6" - DRY/DMP I
22 AWG


BRL



1.36"
.44"
1.62"
.66"

Barrel 6" - WET I 22 AWG


CON6/CON24



1.63"
.38"
1.34"
.39"

6" or 24" Overall
Wire Connector I 22 AWG
IP67 Rated, UL Listed

CLS




Not soldered

6 WIRE COLOR



8 ILLUMINATED LENGTH - DIMENSIONS

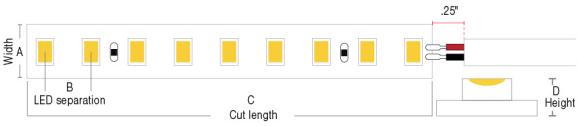

Section (in)	A	B	C	D
DRY (IP20)	0.39"	0.22"	2.00"	0.07"
WET (IP67)	0.47"	0.22"	2.00"	0.18"



SW-HE+24/6.0

LED Strips - Static White High Efficacy Plus

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Dim to Black	Q6M-DC+CAP QTM-DC+CAP IQ-PH+QD1	QOM-DC+CAP QOM-PH
0.1%	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DMX Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with SW App Dongle	



SW-HE+24/6.0

LED Strips - Static White High Efficacy Plus

DIMMING PROTOCOL	INDOOR	OUTDOOR
	SW24/5.0, SW-HE, SW-HE+	SW24/5.0, SW-HE, SW-HE+
Non-Dim	QT-CAB-eLED-ND QTM-eLED-ND QZ-ND	Q-SET-QZ-ND Q-SET-eLED-ND QOM-eLED-ND QZ-ND
Phase	Q6M-DC+CAP QT-CAB-QZ-PH/0-10V QTM-DC+CAP QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP iQ-PH+QD1	Q-SET-QZ-PH/0-10V QOM-DC+CAP QOM-PH QZ-PH/0-10V
0-10V	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+0-10V-AWN QTM-eLED+0-10V QTM-eLED+0-10V-AWN QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+0-10V-AWN QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V-AWN QTM-eLED+DALI-DT6-AWN	
ECO System	QTM-eLED(E)	
DMX	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
SCENE App Dimmed	Non-Dim Power Supply with SW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES













<div>QUOVA-MICRO</div> <div></div> <div>QUOVA Knife Edge</div>	<div>SHIELD A - Medium</div> <div></div> <div>For standalone use</div>	<div>SHIELD B - Medium</div> <div></div> <div>For use within extrusions</div>	<div>BL-GRAZER</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-MICRO</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>BL-LARGE</div> <div></div> <div>Backwards L Mounting Bracket</div>	<div>SD-L-LARGE</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MEDIUM</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-L-MICRO</div> <div></div> <div>L Mounting Bracket</div>	<div>SD-J-LARGE</div> <div></div> <div>J Mounting Bracket</div>
<div>IQ-STRAP</div> <div></div> <div>Plastic strap, Fits all LED strips</div>	<div>IQ-CLIP-SS10</div> <div></div> <div>Metal clip, Fits WET strip</div>	<div>IQ-CLIP-PL</div> <div></div> <div>Plastic clip, Fits WET strip</div>							



SW-HE+24/6.0

LED Strips - Static White High Efficacy Plus

COMPATIBLE WIRING ACCESSORIES

Q-NECT-02-LEAD-24  Connects LED board to 24" lead wire DRY ONLY	Q-NECT-02-JUMP-3  Connects two LED boards together with 3" jumper; DRY ONLY	Q-NECT-02-INLINE  Connects two LED boards together DRY ONLY	Q-NECT-SCREW-LEAD-12  Connects LED board to 12" lead wire DRY ONLY	Q-NECT-SCREW-JUMP-12  Connects two LED boards together with 12" jumper; DRY ONLY	Q-mini-J  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	BARREL-EXT  8ft barrel cable extender DRY ONLY	BARREL FOUR-FER  Splits lead from one to four LED Barrel connector fixtures, DRY/DMP	CON120-EXT  10ft Con cable extender DRY/DMP/WET
CON FOUR-FER  Splits lead from one to four LED Con connectors DRY/DMP/WET	CON M - BARREL  Male con to barrel cable adaptor DRY/DMP								

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



1.36"
2.58"

Wi-Fi or Bluetooth Connectivity

COMPATIBLE APPS

NFC APP



Read and write DMX addresses and adjust voltage