



# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed





410.2 & 410.16  
Closet Rated  
in 1.5HE



BUY AMERICAN  
ACT COMPLIANT



BUILD AMERICA  
BUY AMERICA  
COMPLIANT



- Shallow, low-profile linear fixture for surface or recessed installations
- Produces a 17° beam angle
- Mounting options include stainless steel clips, magnets, and low-profile magnet mounts
- Features painted end caps to match extrusion finish
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Can be suitable for exterior use when specified as wet, contact factory for more information
- Used in applications where CCT and brightness need to be controlled separately
- When using DALI and DMX power supplies, LED wattage must be doubled
- Optional plastic louver accessory available in white or black for added glare control

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
				STD	17DEG

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL

Sample Part Number: **LL2DW-2.5HE-20/30-DRY-STD-17-P1-BW-BW-BK-CL2-SST-BK-48"-E**


<b>1</b>	<b>PRODUCT</b>	<b>2</b>	<b>WATTS/FT</b>	<b>3</b>	<b>CCT</b>	<b>4</b>	<b>RATED</b>	<b>5</b>	<b>EFFICIENCY</b>	<b>6</b>	<b>LENS</b>								
<b>LL2DW</b> <b>LL2DW-USA</b>  Select USA option for BAA and BABA projects. Only DRY or WET ratings apply.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.		<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE		<b>20/27</b> 2000K/2700K <b>20/30</b> 2000K/3000K <b>27/40</b> 2700K/4000K <b>27/55</b> 2700K/5500K		<b>DRY</b> IP20 <b>WET</b> IP67  Can be suitable for exterior use, contact factory for more information		<b>STD</b> Standard		<b>17DEG</b> Optical 17°  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages. For optional snap-on louver ordering, see External Louver Accessory section on following pages									
		<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE		<b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K		<b>DMP</b> IP54													
<b>7</b>	<b>WIRE INPUT/OUTPUT</b>			<b>8</b>	<b>CONNECTOR/WIRE IN</b>			<b>9</b>	<b>CONNECTOR/WIRE OUT</b>			<b>10</b>	<b>WIRE COLOR</b>						
<b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed				<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"				<b>CLS</b> Closed End (No feed)				<b>WH</b> White <b>BK</b> Black							
<b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed				<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"				<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"											
For continuous mounting, consider bottom feed.													BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)						
BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)													BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)						
<b>11</b>	<b>WIRE TYPE</b>			<b>12</b>	<b>MOUNTING</b>			<b>13</b>	<b>FINISH</b>			<b>14</b>	<b>LENGTH (IN)</b>			<b>15</b>	<b>EXACT/OPTIMAL</b>		
<b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)				<b>SST</b> Stainless Steel <b>M4</b> Low Profile Magnet <b>MG</b> Magnet				<b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory				Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".				<b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.			



# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed

### 1 PRODUCT - DIMENSIONS

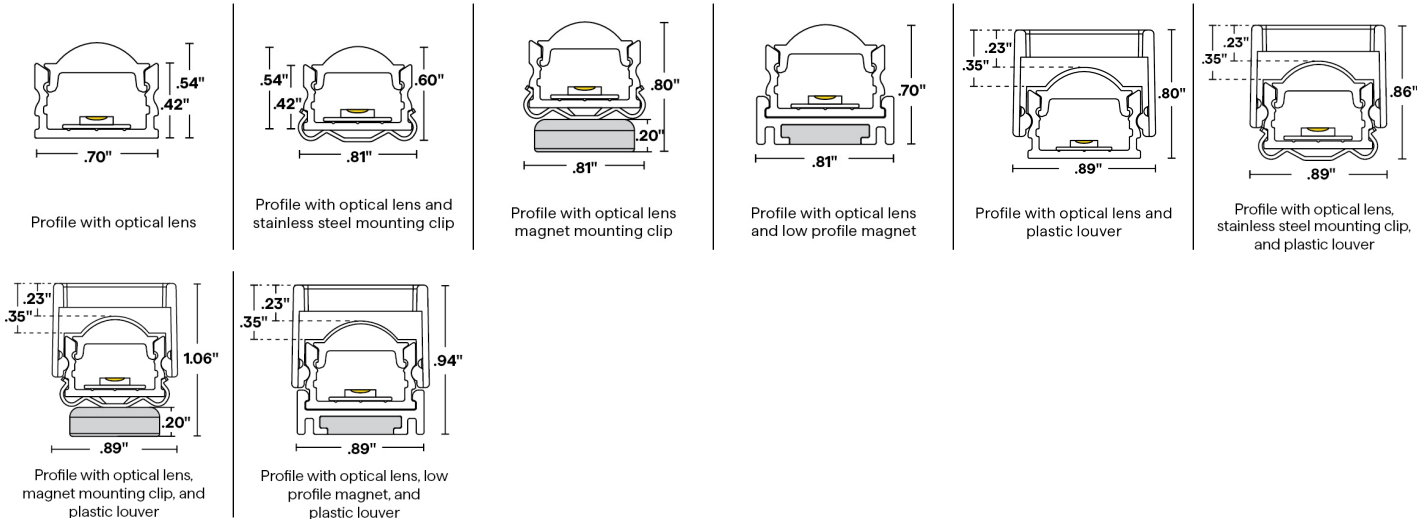

### 2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]  
 Tested with LL2DW-\*\*-30-DRY-STD


	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
17	153	98	242	98

### 6 DIODE VISIBILITY



### PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



### TEMPERATURE RATINGS




# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS

## 24VDC Linear Fixtures - Surface & Recessed


		DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-13°F	105°F	-4°F	120°F	-4°F	135°F	-4°F	120°F
DMP	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F
WET	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F

### 7 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




### CONFIGURATION OPTIONS

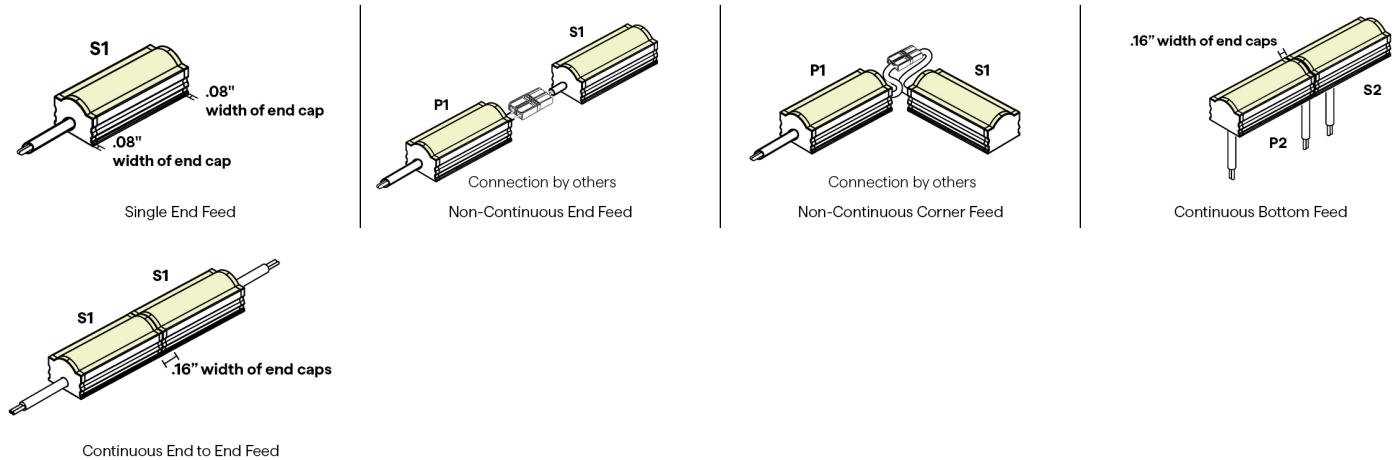

### 8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

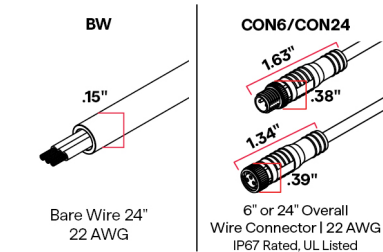

### 10 WIRE COLOR





# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

## EXTERNAL LOUVER ACCESSORY

### PLASTIC




#### L1-XX



Lumen Multiplier  
WH BK



0.73 0.53




Profile with plastic louver

To order separately use  
LALO-L1-OPTICS-KIT-WH or  
LALO-L1-OPTICS-KIT-BK

## 12 MOUNTING

### SST




Stainless Steel Clip

2 clips provided for 4' or less; 4 clips provided for greater than 4'

To order separately use SST-01

Each clip comes with a #4 x 5/8" Flat Head SS

### M4




Low Profile Magnet

One M4 provided per foot.

To order separately use  
MG-04

### MMA-04




Magnet Mount  
Accessory for M4

Sold separately, to order use  
MMA-04

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface

### MG



Magnet Clip

One MG provided per foot

To order separately use MG-01

## 13 FINISH




Satin

Black

Custom finishes require a longer lead time, consult factory

### MMA-01



Magnet Mount  
Accessory of MG-01

Sold separately, to order use  
MMA-01

Each bracket comes with 2 #6 x 5/8" Flat Head SS

Required when mounting to a non-magnetic surface



# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS


## 24VDC Linear Fixtures - Surface & Recessed

### 14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

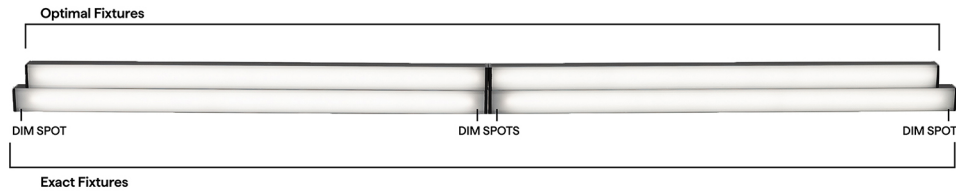

### DW-HE DRY DMP LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	




# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS



24VDC Linear Fixtures - Surface & Recessed

## DW-HE WET LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 		P1 & P2 	
	S1	S2	P1	P2
12"		10.66"		11.06"
13"		12.66"		11.06"
14"		12.66"		13.06"
15"		14.66"		13.06"
16"		14.66"		15.06"
17"		16.66"		15.06"
18"		16.66"		17.06"
19"		18.66"		17.06"
20"		18.66"		19.06"
21"		20.66"		19.06"
22"		20.66"		21.06"
23"		22.66"		21.06"
24"		22.66"		23.06"
36"		34.66"		35.06"
48"		46.66"		47.06"
60"		58.66"		59.06"
72"		70.66"		71.06"
84"		82.66"		83.06"
96"		94.66"		95.06"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	














# ESSENTIALS LALO-OPTICS (02) TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES

<b>HINGE - HMB-M</b>  1.41" .71" Adjustable mounting bracket - Medium	<b>HINGE - HMB-L</b>  1.46" 1.29" Adjustable mounting bracket - Large	<b>HINGE - HMB-XL</b>  1.46" 4" Adjustable mounting bracket - XLarge	<b>Q-PIVOT</b>  .75" 1.03" Small mounting accessory	<b>Q-ANGLE</b>  2.23" 1.38" Adjustable mounting accessory	<b>VHB</b>  Double sided mounting tape	<b>NU-GRAZER</b>  U Mounting Bracket	<b>NJ-GRAZER</b>  J Mounting Bracket	<b>BL-GRAZER</b>  Backwards L Mounting Bracket	<b>MMA-01</b>  1.23" .75" Magnet Mount Accessory of MG-01
<b>MMA-04</b>  1.19" .93" Magnet Mount Accessory of MG-04									