





# ESSENTIALS TALO- ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Suitable for installation in the storage area of a clothes closet when specified with LEDs at 4.0 watts or less per foot per NEC regulations
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled



## INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/ FT	CCT	RATED	EFFICIENCY	LENS
			ENC	STD	

## ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE INPUT/ OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
			STD	STD						

Sample Part Number: **TO3DW-6.0-24/30-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-HSS-ST-48"-E**

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
<b>TO3DW</b> <b>TO3DW-USA</b>  Select USA option for BAA and BABA projects.  LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	<b>1.5HE</b> 1.5W/ft HE <b>2.5HE</b> 2.5W/ft HE	<b>24/30</b> 2400K/3000K <b>27/40</b> 2700K/4000K	<b>ENC</b> IP67	<b>STD</b> Standard	<b>CL</b> Clear <b>TL</b> Translucent  For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages

7	8	9
WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT
<b>SINGLE (Input only)</b> <b>S1</b> End Feed <b>S2</b> Bottom Feed  <b>PASS THROUGH (Input/output)</b> <b>P1</b> End Feed <b>P2</b> Bottom Feed	<b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"	<b>CLS</b> Closed End (No feed)  <b>BW</b> Bare Wire (Standard 24") <b>CON6</b> Connector 6" <b>CON24</b> Connector 24"
For continuous mounting, consider bottom feed When using TBC Mounting, a bare wire S2 wire feed is recommended. See install instructions for details.	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)


10	11	12	13
INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE
<b>STD</b> Standard  STD - End cap matches fixture finish chosen	<b>STD</b> Standard  STD - End cap matches fixture finish chosen	<b>WH</b> White <b>BK</b> Black	<b>CL2</b> Class 2 <b>CL2P</b> Plenum Rated  CL2P only available with bare wire leads (BW)
14	15	16	17
MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
<b>HSS</b> Hidden Stainless Steel Clip <b>TBC-01</b> 9/16" Flat or Tegular TB-Grid <b>TBC-02</b> 15/16" Flat or Tegular TB-Grid	<b>ST</b> Satin <b>BK</b> Black <b>CU</b> Custom  Custom finishes require a longer lead time, consult factory	Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>O</b> Optimal Illumination <b>E</b> Exact Specified Length  Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.




# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface


## 1 PRODUCT - DIMENSIONS




Profile



Profile with hidden stainless steel mounting clip



Profile with TBC-01



Profile with TBC-02

## 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with TO3DW-\*\*-30-ENC-STD

	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
CL	110	98	174	98
TL	57	98	90	98

## 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

## TEMPERATURE RATINGS


	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F

## 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed




Bottom Feed

PASS THROUGH (Input/Output)



End Feed




Bottom Feed



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface

## CONFIGURATION OPTIONS

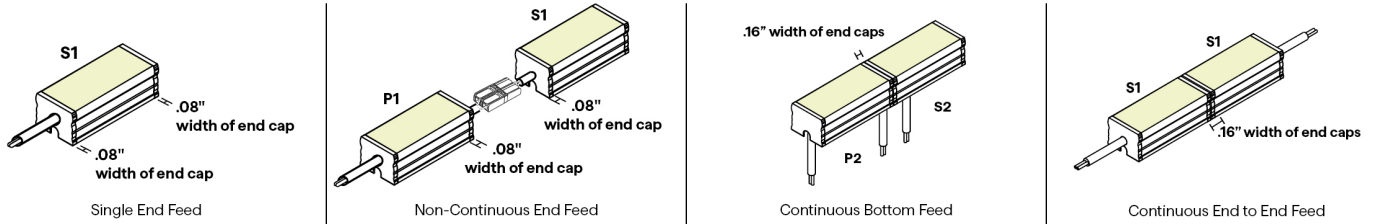

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

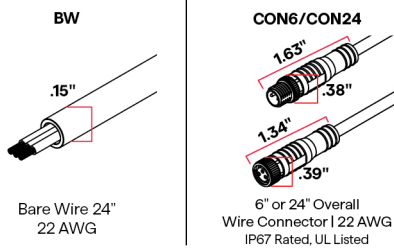


## 12 WIRE COLOR



White  
Black

## 14 MOUNTING

HSS




Hidden Stainless Steel Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SST-02

Each clip comes with a #4 x 5/8 Flat Head SS

TBC-01



Plastic T-Bar Clip


Use on 9/16\" Flat or Tegular Drop Ceiling

2 clips provided for first 12\"; 1 clip provided for each additional 12\" or less length

To order separately use TBC-01

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-02



Plastic T-Bar Clip

Use on 15/16\" Flat or Tegular Drop Ceiling

2 clips provided for first 12\"; 1 clip provided for each additional 12\" or less length

To order separately use TBC-02

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## 15 FINISH



Satin  
Black  
Custom finishes require a longer lead time, consult factory



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface

## 17 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)


[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.




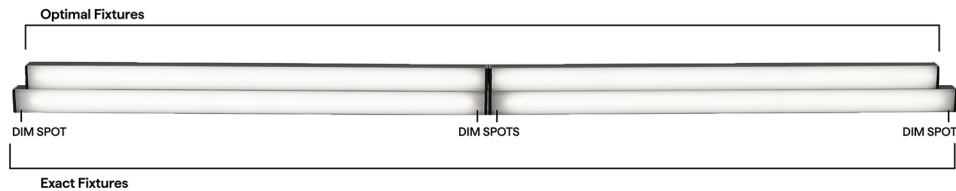


## DW-HE ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
				
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

## COMPATIBLE POWER SUPPLIES


See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Warm Dim Applications	DW-HE Warm Dim Applications
Phase	QZ-DW	Q-SET-QZ-DW QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	Q-SET-QZ-DW QOM-eLED+WD QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	

## COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-M



1.41"  
.71"

Adjustable mounting bracket - Medium


HINGE - HMB-L



1.46"  
1.29"

Adjustable mounting bracket - Large


HINGE - HMB-XL



4"  
1.46"

Adjustable mounting bracket - XLarge


Q-PIVOT



.75"  
1.03"

Small mounting accessory

Q-ANGLE



2.23"  
1.38"





Adjustable mounting accessory



# ESSENTIALS TALO-ENCAPSULATED (03) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface

## COMPATIBLE WIRING ACCESSORIES

<p><b>Q-mini-J5</b></p>  <p>2.80"</p> <p>2.27"</p> <p>UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)</p>	<p><b>CON120-EXT</b></p>  <p>10ft Con cable extender DRY/DMP/WET</p>	<p><b>CON FOUR-FER</b></p>  <p>Splits lead from one to four LED Con connectors DRY/DMP/WET</p>	<p><b>CON M - BARREL F</b></p>  <p>Male con to barrel cable adaptor DRY/DMP</p>
---	---	---	--

## COMPATIBLE CONTROL ACCESSORIES

<p><b>SCENE APP DONGLE</b></p>  <p>1.36"</p> <p>2.58"</p> <p>Wi-Fi or Bluetooth Connectivity</p>
---

## COMPATIBLE APPS

<p><b>NFC APP</b></p>  <p>Read and write DMX addresses and adjust voltage</p>
---