




# ESSENTIALS TALO- ENCAPSULATED (03) RGBW

## 24VDC Linear Fixtures - Surface



- Surface mount linear fixture
- Features high quality LED strips encapsulated in polyurethane in a rigid extrusion providing a robust fixture
- Encapsulation available in clear or translucent
- Suitable for indoor and outdoor locations (IK10)
- Mounting options include hidden stainless steel clip and plastic T-bar clips
- Features painted end caps to match extrusion finish or clear end caps to achieve seamless appearance of long runs
- Red, Green, and Blue LED paired with a specifiable white LED allow for color changing applications
- 21 diodes per 2" cut point allowing for minimal diode visibility

### INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5	6
PRODUCT	WATTS/FT	CCT	RATED	EFFICIENCY	LENS
TO3RGBW			ENC	STD	

### ADDITIONAL INFORMATION REQUIRED TO ORDER

7	8	9	10	11	12	13	14	15	16	17
WIRE INPUT/ OUTPUT	CONNECTOR / WIRE IN	CONNECTOR / WIRE OUT	INPUT END CAP	OUTPUT END CAP	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
			STD	STD						

Sample Part Number: **TO3RGBW-4.OHE-30-ENC-STD-TL-P1-BW-BW-STD-STD-BK-CL2-HSS-ST-48"-E**


<b>1</b> <b>PRODUCT</b> <b>TO3RGBW</b> See following pages for compatible power supplies.	<b>2</b> <b>WATTS/FT</b> 6.0 6.0W/ft 4.OHE 4.0W/ft HE	<b>3</b> <b>CCT</b> 27 RGBW-2700K 30 RGBW-3000K 27 RGBW-2700K 30 RGBW-3000K 35 RGBW-3500K 40 RGBW-4000K	<b>4</b> <b>RATED</b> ENC IP67	<b>5</b> <b>EFFICIENCY</b> STD Standard	<b>6</b> <b>LENS</b> CL Clear TL Translucent For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	
<b>7</b> <b>WIRE INPUT/OUTPUT</b> SINGLE (Input only) S1 End Feed S2 Bottom Feed PASS THROUGH (Input/output) P1 End Feed P2 Bottom Feed	<b>8</b> <b>CONNECTOR/WIRE IN</b> BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	<b>9</b> <b>CONNECTOR/WIRE OUT</b> CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24"	<b>10</b> <b>INPUT END CAP</b> STD Standard STD - End cap matches fixture finish chosen	<b>11</b> <b>OUTPUT END CAP</b> STD Standard STD - End cap matches fixture finish chosen	<b>12</b> <b>WIRE COLOR</b> WH White BK Black	<b>13</b> <b>WIRE TYPE</b> CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)
<b>14</b> <b>MOUNTING</b> HSS Hidden Stainless Steel Clip TBC-01 9/16" Flat or Tegular TB-Grid TBC-02 15/16" Flat or Tegular TB-Grid	<b>15</b> <b>FINISH</b> ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	<b>16</b> <b>LENGTH (IN)</b> Minimum length is 12", maximum length is 98" not including end caps. Contact us for lengths under 12".	<b>17</b> <b>EXACT/OPTIMAL</b> O Optimal Illumination E Exact Specified Length Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.			




# ESSENTIALS TALO-ENCAPSULATED (03) RGBW

## 24VDC Linear Fixtures - Surface


### 1 PRODUCT - DIMENSIONS




Profile



Profile with hidden stainless steel mounting clip



Profile with TBC-01



Profile with TBC-02

### 2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]  
Tested with TO3RGBW-\*\*-30-ENC-STD

	6.0 W/FT								4.0HE W/FT							
	Red		Green		Blue		3000K		Red		Green		Blue		3000K	
	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	WAVELENGTH	LM/FT	CRI
CL	28	631	76	513	23	464	97	93	25	629	95	516	20	465	58	97
TL	15	631	39	513	12	464	50	93	13	629	49	516	11	465	30	97

### 6 DIODE VISIBILITY



ENC/CL - Clear encapsulation


ENC/TL - Translucent encapsulation

### TEMPERATURE RATINGS


	6.0 W/FT		4.0 HE W/FT	
	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	100°F	-4°F	110°F

### 7 WIRE INPUT/OUTPUT

SINGLE (Input only)




End Feed




Bottom Feed

PASS THROUGH (Input/Output)



End Feed




Bottom Feed



# ESSENTIALS TALO-ENCAPSULATED (03) RGBW


24VDC Linear Fixtures - Surface

## CONFIGURATION OPTIONS

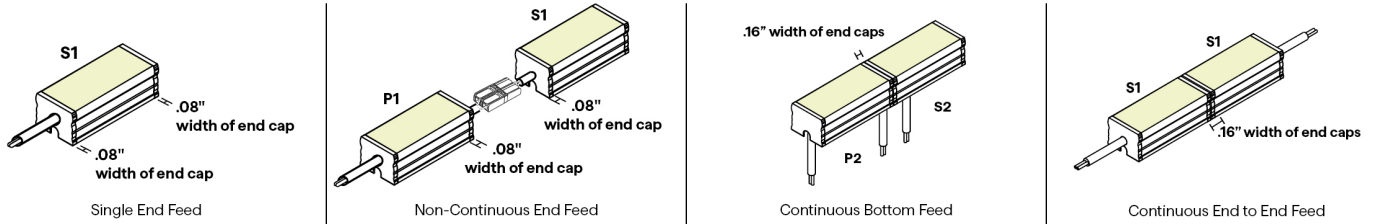

## 8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Standard configuration is BW for Wire In and CLS for Wire out

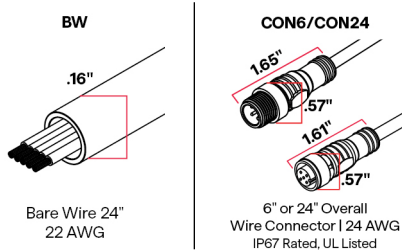


## 12 WIRE COLOR



## 14 MOUNTING

### HSS




Hidden Stainless Steel Clip

2 clips provided for 4' or less. 4 clips provided for greater than 4'.

To order separately use SST-02

Each clip comes with a #4 x 5/8 Flat Head SS

### TBC-01



Plastic T-Bar Clip


Use on 9/16 inch Flat or Tegular Drop Ceiling

2 clips provided for first 12'; 1 clip provided for each additional 12' or less length

To order separately use TBC-01

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

### TBC-02



Plastic T-Bar Clip

Use on 15/16 inch Flat or Tegular Drop Ceiling

2 clips provided for first 12'; 1 clip provided for each additional 12' or less length

To order separately use TBC-02

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

## 15 FINISH



Custom finishes require a longer lead time, consult factory



# ESSENTIALS TALO-ENCAPSULATED (03) RGBW

## 24VDC Linear Fixtures - Surface

17

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.



### RGBW-HE ENC LENGTHS BY INCH

#### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

#### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2		P1 & P2	
	S1	S2	P1	P2
12"	10.51"		10.86"	
13"	12.51"		12.86"	
14"	12.51"		12.86"	
15"	14.51"		14.86"	
16"	14.51"		14.86"	
17"	16.51"		16.86"	
18"	16.51"		16.86"	
19"	18.51"		18.86"	
20"	18.51"		18.86"	
21"	20.51"		20.86"	
22"	20.51"		20.86"	
23"	22.51"		22.86"	
24"	22.51"		22.86"	
36"	34.51"		34.86"	
48"	46.51"		46.86"	
60"	58.51"		58.86"	
72"	70.51"		70.86"	
84"	82.51"		82.86"	
96"	94.51"		94.86"	




# ESSENTIALS TALO-ENCAPSULATED (03) RGBW



24VDC Linear Fixtures - Surface

## RGBW ENC LENGTHS BY INCH

### EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1 
12"	2"
13"	0.5"
14"	1"
15"	1.5"
16"	2"
17"	0.5"
18"	1"
19"	1.5"
20"	2"
21"	0.5"
22"	1"
23"	1.5"
24"	2"
36"	2"
48"	2"
60"	2"
72"	2"
84"	2"
96"	2"

### OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 
	S1 End Feed	P1 End Feed
12"	8.51"	8.86"
13"	12.51"	12.86"
14"	12.51"	12.86"
15"	12.51"	12.86"
16"	12.51"	12.86"
17"	16.51"	16.86"
18"	16.51"	16.86"
19"	16.51"	16.86"
20"	16.51"	16.86"
21"	20.51"	20.86"
22"	20.51"	20.86"
23"	20.51"	20.86"
24"	20.51"	20.86"
36"	32.51"	32.86"
48"	44.51"	44.86"
60"	56.51"	56.86"
72"	68.51"	68.86"
84"	80.51"	80.86"
96"	92.51"	92.86"

## COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGBW App Dongle	






DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGBW, RGBW-HE	RGBW, RGBW-HE
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with RGBW App Dongle	




# ESSENTIALS TALO-ENCAPSULATED (03) RGBW

24VDC Linear Fixtures - Surface

## COMPATIBLE MOUNTING ACCESSORIES



HINGE - HMB-M	HINGE - HMB-L	HINGE - HMB-XL	Q-PIVOT	Q-ANGLE
 1.41" .71"	 1.46" 1.29"	 4" 1.46"	 .75" 1.03"	 2.23" 1.38"
Adjustable mounting bracket - Medium	Adjustable mounting bracket - Large	Adjustable mounting bracket - XLarge	Small mounting accessory	Adjustable mounting accessory

## COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

## COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE	IQ-DMX-STICK-GA2
 1.36" 2.58" Wi-Fi or Bluetooth Connectivity	 DMX controller for changing color & dimming

## COMPATIBLE APPS

