





MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS



Profile with 20D lens



Profile with 20D lens and stainless steel mounting clip

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with ATOM-02-DW-2.0-**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
20D	124	93	130	98	140	98	146	98	156	97


5 DIODE VISIBILITY



Optical lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



20D lens at 3000K

TEMPERATURE RATINGS

		DW 2.0 W/FT		DW 4.0 W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	140°F	-4°F	120°F

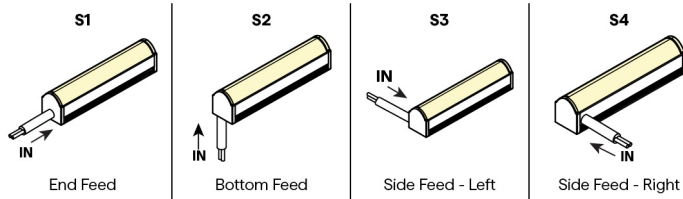


MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)

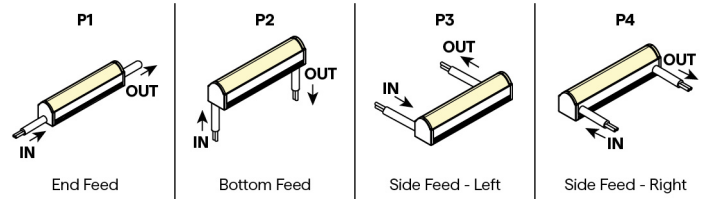


CONFIGURATION OPTIONS

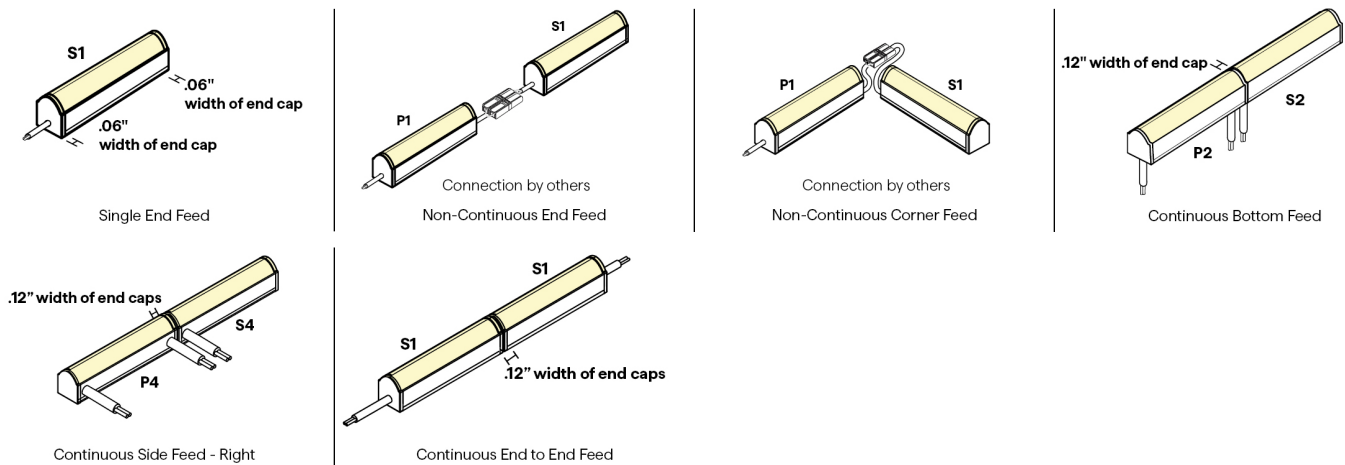

7 / 8 CONNECTOR/WIRE - IN/OUT

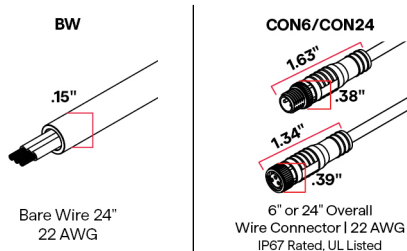Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out



9 WIRE COLOR





MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

11 MOUNTING

SST



Stainless Steel Clip

2 pieces of hardware provided for 4' or less; 4 pieces provided for greater than 4'

To order separately use SST-08

Each clip comes with a #4 x 5/8" Flat Head SS

12 FINISH



Satin

Black

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS









24VDC Linear Fixtures - Surface & Recessed

DW DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 & S3 & S4				P1 & P2 & P3 & P4			
								
12"			10.48"				10.83"	
13"			12.48"				12.83"	
14"			12.48"				12.83"	
15"			14.48"				14.83"	
16"			14.48"				14.83"	
17"			16.48"				16.83"	
18"			16.48"				16.83"	
19"			18.48"				18.83"	
20"			18.48"				18.83"	
21"			20.48"				20.83"	
22"			20.48"				20.83"	
23"			22.48"				22.83"	
24"			22.48"				22.83"	
36"			34.48"				34.83"	
48"			46.48"				46.83"	
60"			58.48"				58.83"	
72"			70.48"				70.83"	
84"			82.48"				82.83"	
96"			94.48"				94.83"	

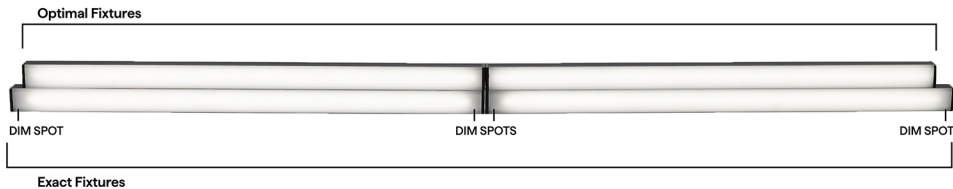
14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.





MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed









DW DRY LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1 & S2 & S3 & S4				P1 & P2 & P3 & P4			
	S1  End Feed	S2  Bottom Feed	S3  Side Feed - Left	S4  Side Feed - Right	P1  End Feed	P2  Bottom Feed	P3  Side Feed - Left	P4  Side Feed - Right
12"			10.48"				10.83"	
13"			12.48"				12.83"	
14"			12.48"				12.83"	
15"			14.48"				14.83"	
16"			14.48"				14.83"	
17"			16.48"				16.83"	
18"			16.48"				16.83"	
19"			18.48"				18.83"	
20"			18.48"				18.83"	
21"			20.48"				20.83"	
22"			20.48"				20.83"	
23"			22.48"				22.83"	
24"			22.48"				22.83"	
36"			34.48"				34.83"	
48"			46.48"				46.83"	
60"			58.48"				58.83"	
72"			70.48"				70.83"	
84"			82.48"				82.83"	
96"			94.48"				94.83"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle




MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Tunable Applications
0-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle

COMPATIBLE MOUNTING ACCESSORIES


HINGE - HMB-S



1.41" .51"


Adjustable mounting bracket - Small

VHB




Double sided mounting tape

NJ-GRAZER




J Mounting Bracket

BL-GRAZER



Backwards L Mounting Bracket


NU-GRAZER



U Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



2.80" 2.27"

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



1.36" 2.58"

Wi-Fi or Bluetooth Connectivity



MICRO 5 ATOM-OPTICS (02) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage