





MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed



- MICRO 5 Series linear LED fixture designed to provide superior light performance and uniformity with discreet integration into drywall
- Two-piece mud-in fixture
- Suitable for indoor and outdoor locations
- 48% smaller than QTL's standard size extrusion (MDIN)
- Delivers equivalent efficacy as standard size fixtures
- Once installed, its wings are covered with tape and compound to create a seamless look
- Red, Green, and Blue LED allows for color changing applications

INFORMATION REQUIRED FOR LIGHTING SCHEDULE

1	2	3	4	5
PRODUCT	WATTS/ FT	CCT	RATED	LENS
SLITE-03-RGB	4.0	RGB	ENC	

ADDITIONAL INFORMATION REQUIRED TO ORDER

6	7	8	9	10	11	12	13	14
WIRE INPUT/ OUTPUT	CONNECTOR/ WIRE IN	CONNECTOR/ WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/ OPTIMAL
					SC			

Sample Part Number: **SLITE-03-RGB-4.0-RGB-ENC-TL-S1-BW-CLS-WH-CL2-SC-ST-48"-E**

<div>1</div> <div>PRODUCT</div> <div>SLITE-03-RGB</div> <div>See following pages for compatible power supplies.</div>	<div>2</div> <div>WATTS/FT</div> <div>4.04.0W/ft</div>	<div>3</div> <div>CCT</div> <div>RGB</div>	<div>4</div> <div>RATED</div> <div>ENCIP67</div>	<div>5</div> <div>LENS</div> <div>CLClear TLTranslucent</div> <div>For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages</div>	
<div>6</div> <div>WIRE INPUT/OUTPUT</div> <div><div>SINGLE (Input only)</div><div>S1End Feed S2Bottom Feed</div><div>For continuous mounting, consider bottom feed.</div></div> <div><div>PASS THROUGH (Input/output)</div><div>P1End Feed P2Bottom Feed</div><div>For continuous mounting, consider bottom feed.</div></div>	<div>7</div> <div>CONNECTOR/WIRE IN</div> <div><div>BWCON6CON24</div><div>Bare Wire (Standard 24") Connector 6" Connector 24"</div><div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div> <div><div>BWCON6CON24</div><div>Bare Wire (Standard 24") Connector 6" Connector 24"</div><div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div>	<div>8</div> <div>CONNECTOR/WIRE OUT</div> <div><div>CLS</div><div>Closed End (No feed)</div></div> <div><div>BWCON6CON24</div><div>Bare Wire (Standard 24") Connector 6" Connector 24"</div><div>BW: Standard length is 24", Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div></div>			
<div>9</div> <div>WIRE COLOR</div> <div>WHWhite BKBlack</div>	<div>10</div> <div>WIRE TYPE</div> <div><div>CL2CL2P</div><div>Class 2 Plenum Rated</div><div>CL2P only available with bare wire leads (BW)</div></div>	<div>11</div> <div>MOUNTING</div> <div>SCScrew</div>	<div>12</div> <div>FINISH</div> <div><div>STCU</div><div>Satin Custom</div><div>Custom finishes require a longer lead time, consult factory</div></div>	<div>13</div> <div>LENGTH (IN)</div> <div>Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".</div>	<div>14</div> <div>EXACT/OPTIMAL</div> <div><div>E O</div><div>Exact specified length Optimal illumination</div><div>Exact fixtures match the exact length you specify, but they may have dim spots at the ends. Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end.</div></div>


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS

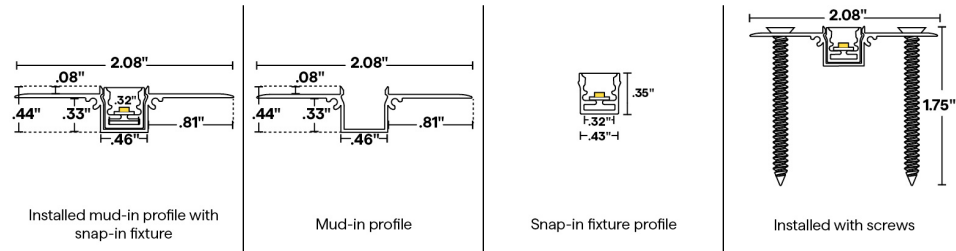


2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with SLITE-03-RGB-4.0-RGB-ENC


	Red		Green		Blue		All
	LM/FT	Wavelength	LM/FT	Wavelength	LM/FT	Wavelength	
CL	23	628	73	524	22	469	106
TL	19	629	58	524	17	468	84

5 DIODE VISIBILITY

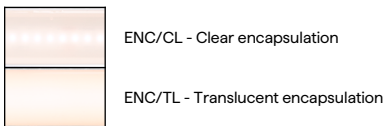

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.



TEMPERATURE RATINGS

	4.0 W/FT	
	Min	Max
Ambient Operating Temp - Recessed	-4°F	100°F




MICRO 5 SLITE-ENCAPSULATED (03) RGB


24VDC Linear Fixtures - Recessed

6 WIRE INPUT/OUTPUT


SINGLE (Input only)



PASS THROUGH (Input/Output)




CONFIGURATION OPTIONS

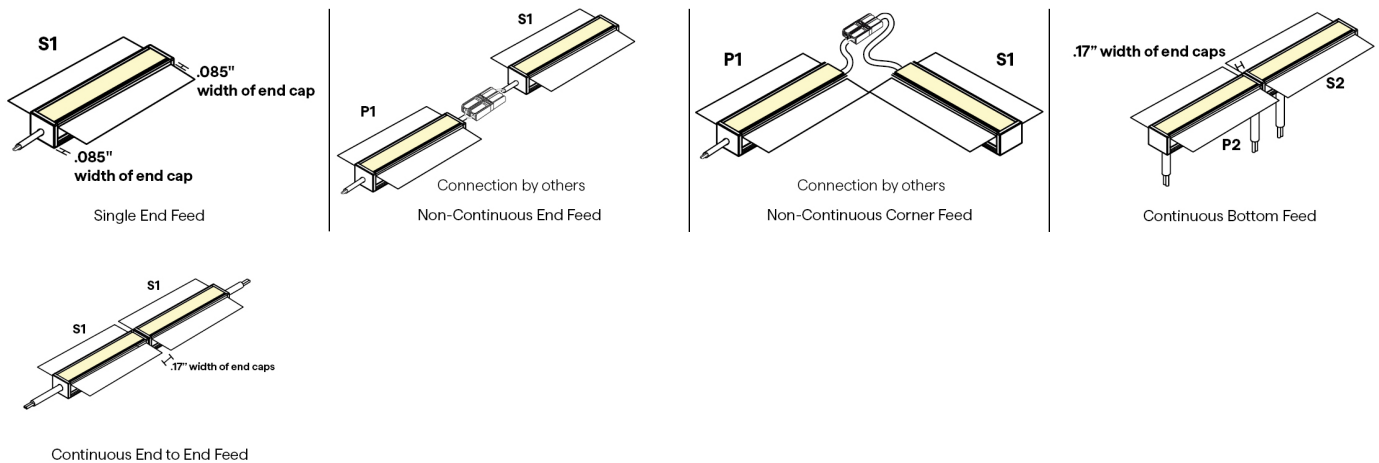

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

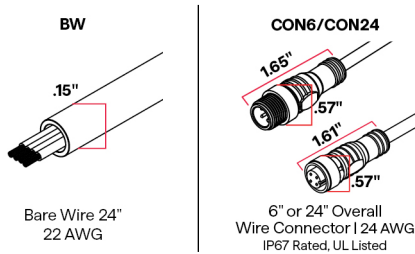

9 WIRE COLOR






MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

11 MOUNTING

SC



Screw

#8 Flat head screw

12 FINISH



Satin


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

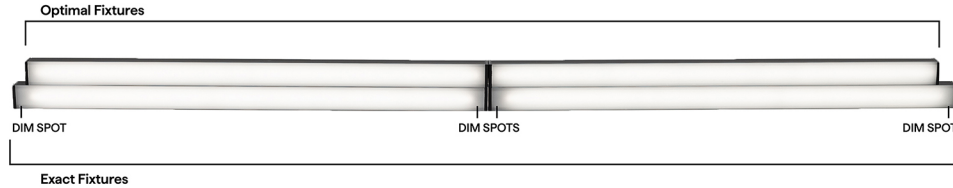



MICRO 5 SLITE-ENCAPSULATED (03) RGB





24VDC Linear Fixtures - Recessed

RGB ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture S1  End Feed
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1  End Feed	S2  Bottom Feed	P1  End Feed	P2  Bottom Feed
12"	10.48"	10.61"	10.83"	11.08"
13"	12.48"	12.61"	12.83"	11.08"
14"	12.48"	12.61"	12.83"	13.08"
15"	14.48"	14.61"	14.83"	13.08"
16"	14.48"	14.61"	14.83"	15.08"
17"	16.48"	16.61"	16.83"	15.08"
18"	16.48"	16.61"	16.83"	17.08"
19"	18.48"	18.61"	18.83"	17.08"
20"	18.48"	18.61"	18.83"	19.08"
21"	20.48"	20.61"	20.83"	19.08"
22"	20.48"	20.61"	20.83"	21.08"
23"	22.48"	22.61"	22.83"	21.08"
24"	22.48"	22.61"	22.83"	23.08"
36"	34.48"	34.61"	34.83"	35.08"
48"	46.48"	46.61"	46.83"	47.08"
60"	58.48"	58.61"	58.83"	59.08"
72"	70.48"	70.61"	70.83"	71.08"
84"	82.48"	82.61"	82.83"	83.08"
96"	94.48"	94.61"	94.83"	95.08"


14

EXACT/OPTIMAL FIXTURE LENGTH

E/O Length Calculator →

E/O Explained →

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

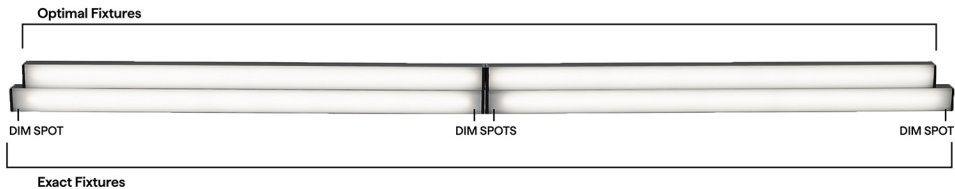



MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed





RGB ENC LENGTHS BY INCH

Available in any length in between 12" and 98.43" not including end caps, chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	S2	P1	P2
	 End Feed	 Bottom Feed	 End Feed	 Bottom Feed
12"	10.48"	10.61"	10.83"	11.08"
13"	12.48"	12.61"	12.83"	11.08"
14"	12.48"	12.61"	12.83"	13.08"
15"	14.48"	14.61"	14.83"	13.08"
16"	14.48"	14.61"	14.83"	15.08"
17"	16.48"	16.61"	16.83"	15.08"
18"	16.48"	16.61"	16.83"	17.08"
19"	18.48"	18.61"	18.83"	17.08"
20"	18.48"	18.61"	18.83"	19.08"
21"	20.48"	20.61"	20.83"	19.08"
22"	20.48"	20.61"	20.83"	21.08"
23"	22.48"	22.61"	22.83"	21.08"
24"	22.48"	22.61"	22.83"	23.08"
36"	34.48"	34.61"	34.83"	35.08"
48"	46.48"	46.61"	46.83"	47.08"
60"	58.48"	58.61"	58.83"	59.08"
72"	70.48"	70.61"	70.83"	71.08"
84"	82.48"	82.61"	82.83"	83.08"
96"	94.48"	94.61"	94.83"	95.08"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	

DIMMING PROTOCOL	INDOOR	OUTDOOR
	MICRO 5-RGB	MICRO 5-RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8




MICRO 5 SLITE-ENCAPSULATED (03) RGB

24VDC Linear Fixtures - Recessed

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5



UL Listed, miniature
junction box, DRY/DMP
(WET rated with silicone)

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage