




AL-29

120V PAR20 35W Halogen/11W LED Accent Light

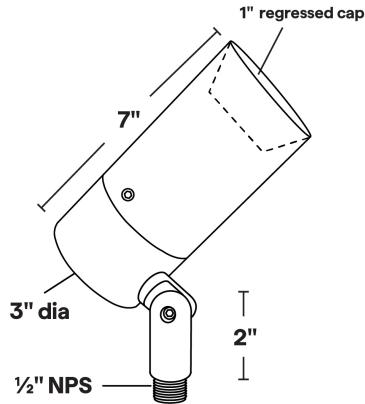

- 1" regressed lens cap; holds up to three accessories
- 6061 Marine Grade Aluminum components are anodized, then a polyester powder coat finish is applied.
- Stainless steel hardware.
- 10' of 18ga. Teflon coated wire leads.
- Clear tempered glass lens, glued in.
- High-temperature silicone O-ring seal used to seal the cap against the body.
- Maximum Wattage: 35W Halogen/11W LED
- Input Voltage: 120V
- Socket: Medium base ceramic
- Wet Listed
- Specification-grade, wet-location landscape luminaire for adjustable flood or accent lighting applications. Suitable for uplighting or downlighting. Can be utilized for ground mounted, tree mounted, or surface mounted installations.

AL-29 Shown in Bronze Texture Powder Coat Finish (BZT)
Knuckle: Tapered & Positive Locking

Dimensions: 3" dia. x 7"

| 1 | 2 | 3 |
|---------|----------|--------|
| PRODUCT | MATERIAL | FINISH |
| AL-29 | A | |

Sample Part Number: AL-29-A-BK

| 1 | 2 | 3 |
|---------|------------|---|
| PRODUCT | MATERIAL | FINISH |
| AL-29 | A Aluminum | <div><div>BG</div>Beige</div> <div><div>BB</div>Black Bronze</div> <div><div>BK</div>Black</div> <div><div>BKT</div>Black Texture</div> <div><div>BZ</div>Bronze</div> <div><div>BZT</div>Bronze Texture</div> <div><div>SL</div>Silver</div> <div><div>WH</div>White</div> |

5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




AL-29

120V PAR20 35W Halogen/11W LED Accent Light

1

PRODUCT - DIMENSIONS

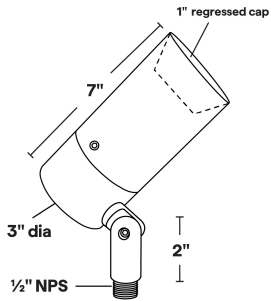

2

MATERIAL



Aluminum

3


FINISH

Eight Standard TGIC Free powder coat finishes available



ACCESSORIES - LENS

Holds up to three accessories



SP

Spread Lens


To order separately
use AY-1-PAR20-1



LI

Linear Lens

To order separately
use AY-1-PAR20-2



SO

Softening Lens

To order separately
use AY-1-PAR20-3



LV

Louver Lens

To order separately
use AY-1-PAR20-4



WI

Wire Holder

To order separately
use AY-1-PAR20-5



FR

Frosted Lens


To order separately
use AY-1-PAR20-6



AL-29
120V PAR20 35W Halogen/11W LED Accent Light

ACCESSORIES - MOUNTING

1/2" NPS; Mount options must be ordered separately

| | | |
|--|--|---|
| MT-24  Single Gang Junction Box Cover | MT-25  Round 4/0 Junction Box Cover | MT-26  Square 4/0 Junction Box Cover |
|--|--|---|

LAMPS

PAR20 Halogen or LED; Medium base ceramic
Maximum wattage: 35W Halogen/11W LED

| | |
|---|---|
| PAR20  SORAA VIVID 11.0W | PAR20  SORAA BRILLIANT 8.5W, 11.0W |
|---|---|