




VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed



- Wet-rated VERSatile fixture encapsulated in polyurethane
- The polyurethane encapsulation provides optimal delivered lumens
- Features integrated metal endcaps
- Mounting options include a concealed or magnetic clip
- With an internal White Optics coating, the fixture achieves greater lumen output
- Durable anodized aluminum housings
- Consult factory for field assembly options
- Optional external louver accessory available in white or black for added glare control

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
PRODUCT	WATTS/FT	CCT	RATED	LENS	EXTERNAL LOUVER	WIRE IN/OUT	CONN/WIRE IN	CONN/WIRE OUT	END CAP IN	END CAP OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
			ENC													

Sample Part Number: **VERS-06-DW-2.5HE-27/40-ENC-ENC/TL-L1-BK-P1-BW-BW-STD-STD-BK-CL2-CC-BK-48"-E**

1

PRODUCT

VERS-06-DW

VERS-06-DW-USA

Select USA option for BAA and BABA projects.

LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.

2

WATTS/FT

1.5HE

1.5W/ft HE

2.5HE

2.5W/ft HE

3

CCT

24/30

2400K/3000K

27/40

2700K/4000K

4

RATED

ENC

IP67

5

LENS

ENC/CL

Encapsulated in Clear

ENC/TL

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages.

For beam angles, see Photometric Performance section on following pages

6

EXTERNAL LOUVER

L1-WH

White Plastic

L1-BK

Black Plastic

L2-ST

Satin Anodized Aluminum

L2-BK

Black Anodized Aluminum

L2-WH

White Powder Coated Aluminum

N/A

No Louver

Plastic Louvers come in 12" lengths, multiple pieces will be used to match fixture length.

Aluminum louvers come in maximum 98" lengths and will be cut to match fixture length.

White and custom painted finishes are not compatible with L2 external louvers.

7

WIRE IN/OUT

S1

Single 1 - End Feed

S2

Single 2 - Bottom Feed

S3

Single 3 - Left Side Feed

S4

Single 4 - Right Side Feed

P1

Pass Through 1 - End Feed

P2

Pass Through 2 - Bottom Feed

P3

Pass Through 3 - Left Side Feed

P4

Pass Through 4 - Right Side Feed

P2, P3, P4 options not compatible with external louver

8

CONN/WIRE IN

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

9

CONN/WIRE OUT

CLS

Closed End (No feed)

BW

Bare Wire (Standard 36")

CON6

Connector 6"

CON24

Connector 24"

BW: Standard length is 36". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

10

END CAP IN

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

11

END CAP OUT

STD

Standard

CL

Clear

STD - End cap matches fixture finish chosen

Select CL for continuous runs

12

WIRE COLOR

WH

White

BK

Black

13

WIRE TYPE

CL2

Class 2

CL2P

Plenum Rated

CL2P only available with bare wire leads (BW)

14

MOUNTING

CC

Concealed Clip

MG

Magnet

15

FINISH

ST

Satin

BK

Black

BZ

Bronze

WH

White

CU

Custom

White and custom finishes are incompatible with external louvers; custom finishes have longer lead times. Non-RAL 9003 whites custom.

16

LENGTH (IN)

Minimum length is 12", maximum length is 98" not including end caps.

Contact us for lengths under 12".

17

EXACT/OPTIMAL

O

Optimal Illumination

E

Exact Specified Length

Exact fixtures match the exact length you specify, but they may have dim spots at the ends.

Optimal fixtures are slightly shorter than the length specified, but provide full illumination from end to end. See Exact/Optimal Fixture Length charts.


5 year warranty | Warranty only valid with QTL power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance




VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


1 PRODUCT - DIMENSIONS




Profile




Profile with concealed clip




Profile with magnetic clip



Profile with magnet mount clip & magnetic mount accessory



Profile with Louver



Profile with concealed clip and louver

2 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with VERS-06-DW-**-**-ENC


	1.5HE W/FT		2.5HE W/FT	
	LM/FT	CRI	LM/FT	CRI
ENC/CL	114	97	169	97
ENC/TL	96	97	141	96

5 DIODE VISIBILITY



PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

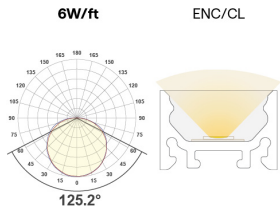







VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed





6 EXTERNAL LOUVER

PLASTIC

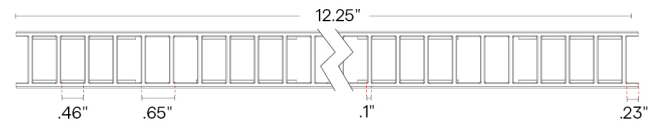

Profile with plastic louver

METAL

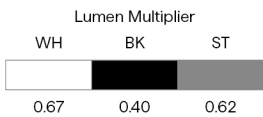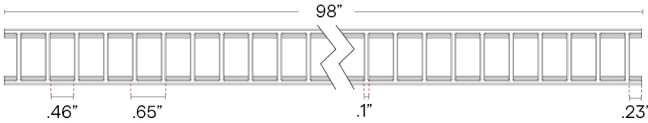


Profile with metal louver

TEMPERATURE RATINGS


	DW 1.5 HE W/FT		DW 3.0 HE W/FT		DW 2.5 HE W/FT		DW 5.0 HE W/FT	
	QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
	Min	Max	Min	Max	Min	Max	Min	Max
Ambient Operating Temp - Surface	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F

7 WIRE INPUT/OUTPUT

SINGLE (Input only)

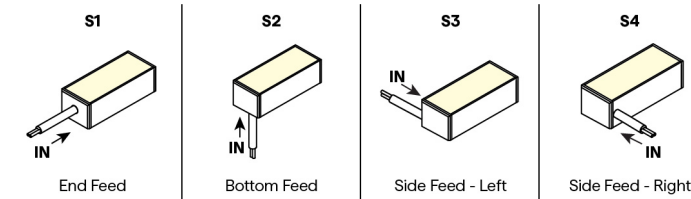

PASS THROUGH (Input/Output)

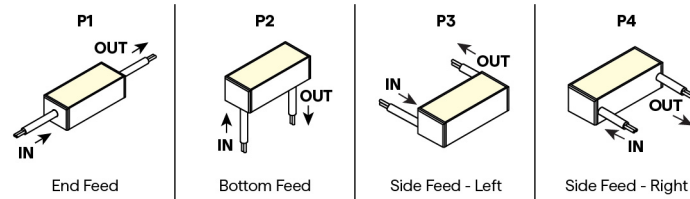




VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

CONFIGURATION OPTIONS

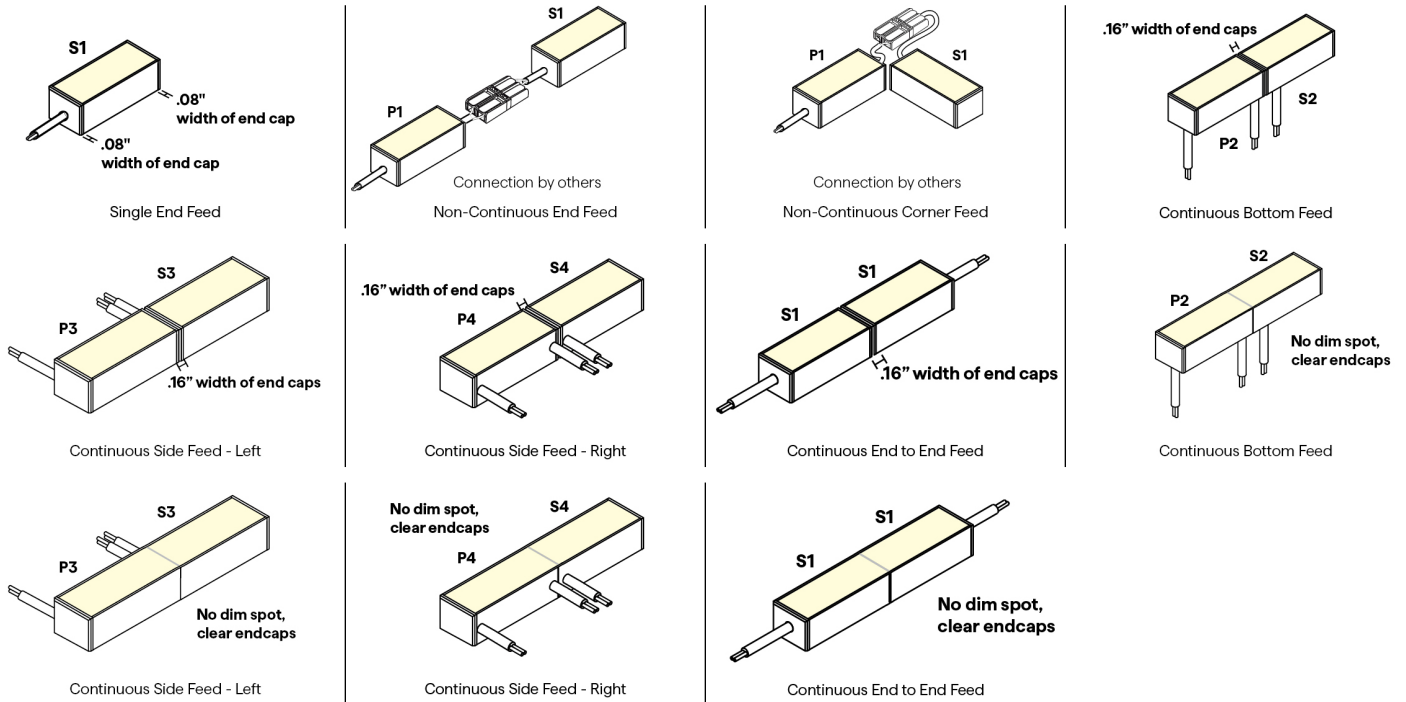


8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

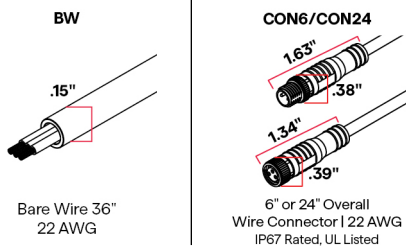

10 / 11 END CAP - IN/OUT

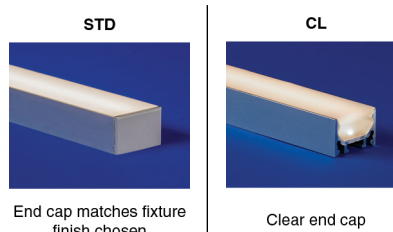

12 WIRE COLOR













VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

14 MOUNTING

<p>CC (CC-01)</p>  <p>Concealed Clip</p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-01 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	<p>CC (CC-02)</p>  <p>Louver Concealed Clip <small>Required if L1 or L2 Louver is selected</small></p> <p>2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'</p> <p>To order separately use CC-02 (sold in pairs)</p> <p>Each clips comes with a #4 x 5/8" Flat Head screw.</p>	<p>MG</p>  <p>Magnet Clip</p> <p>One MG provided per foot</p> <p>To order separately use MG-02</p>	<p>MMA-02</p>  <p>Magnet Mount Accessory for MG-02</p> <p>Sold separately, to order use MMA-02</p> <p>Each clip comes with a #6 Flat Screw</p> <p>Required when mounting to a non-magnetic surface</p>
--	--	--	--

15 FINISH


	Satin
	Black
	Bronze
	White

Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#) [E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

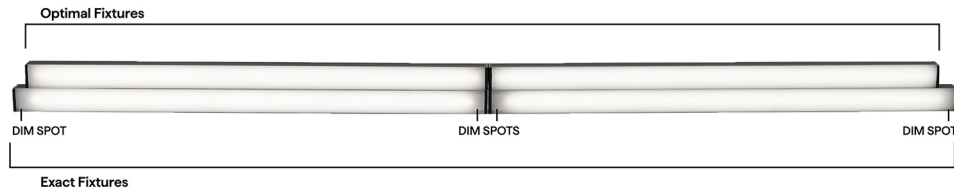




VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS




24VDC Linear Fixtures - Surface & Recessed

DW-HE ENC LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	S1 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed		P1 & P2  End Feed		S3 & S4  Side Feed - Left		P3 & P4  Side Feed - Left	
	S2  Bottom Feed		P2  Bottom Feed		S4  Side Feed - Right		P4  Side Feed - Right	
12"	10.59"		10.94"		10.49"		10.59"	
13"	12.59"		12.94"		12.49"		12.59"	
14"	12.59"		12.94"		12.49"		12.59"	
15"	14.59"		14.94"		14.49"		14.59"	
16"	14.59"		14.94"		14.49"		14.59"	
17"	16.59"		16.94"		16.49"		16.59"	
18"	16.59"		16.94"		16.49"		16.59"	
19"	18.59"		18.94"		18.49"		18.59"	
20"	18.59"		18.94"		18.49"		18.59"	
21"	20.59"		20.94"		20.49"		20.59"	
22"	20.59"		20.94"		20.49"		20.59"	
23"	22.59"		22.94"		22.49"		22.59"	
24"	22.59"		22.94"		22.49"		22.59"	
36"	34.59"		34.94"		34.49"		34.59"	
48"	46.59"		46.94"		46.49"		46.59"	
60"	58.59"		58.94"		58.49"		58.59"	
72"	70.59"		70.94"		70.49"		70.59"	
84"	82.59"		82.94"		82.49"		82.59"	
96"	94.59"		94.94"		94.49"		94.59"	

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+TW QTM-eLED+TW-AWN QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+TW QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with TW App Dongle	



VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR	OUTDOOR
	DW-HE Tunable Applications	DW-HE Tunable Applications
O-10V	QT-CAB-eLED+TW QT-CAB-eLED+TW-AWN QTM-eLED+TW QTM-eLED+TW-AWN	QOM-eLED+TW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+TW-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+TW-AWN	
DMX LED wattage must be doubled for DW-HE products	QZ-DMX	Q-SET-QZ-DMX QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QOM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with TW App Dongle	

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M

Adjustable mounting bracket - Medium

HINGE - HMB-L

Adjustable mounting bracket - Large

HINGE - HMB-XL

Adjustable mounting bracket - XLarge

Q-PIVOT

Small mounting accessory

Q-ANGLE

Adjustable mounting accessory

NJ-LARGE

J Mounting Bracket

NU-LARGE

U Mounting Bracket

SD-J-LARGE

J Mounting Bracket

BL-LARGE

Backwards L Mounting Bracket

NL-LARGE

L Mounting Bracket

SD-L-LARGE

L Mounting Bracket

COMPATIBLE WIRING ACCESSORIES

Q-mini-J5

UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



VERS-ENCAPSULATED (06) FOR TUNABLE APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage