




VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

1 PRODUCT - DIMENSIONS

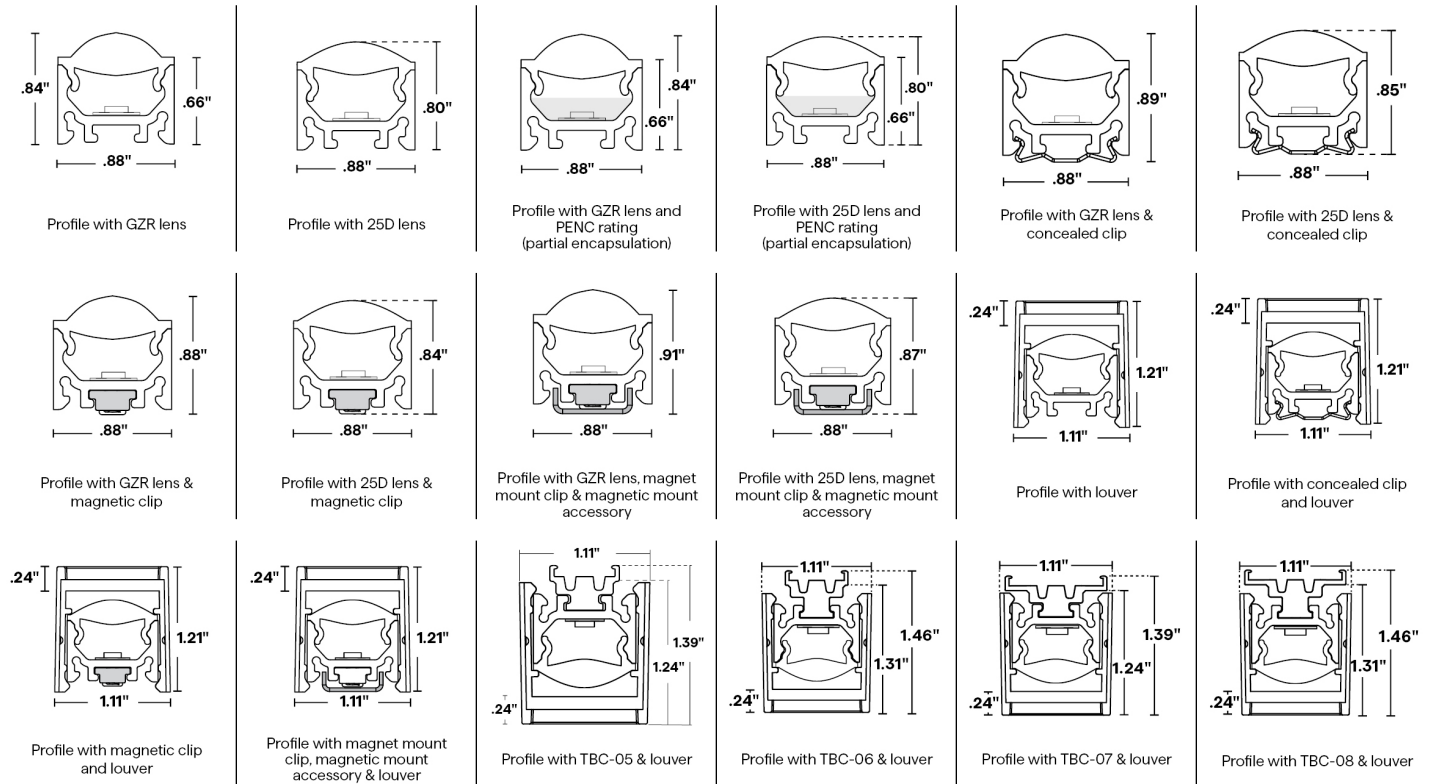

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with VERS-04-WD-**-30-DRY

	6.0 W/FT	
	LM/FT	CRI
GZR	502	97
25D	485	97

[Calculated L70 = 70000 hrs]
Tested with VERS-04-DW-**-30-DRY

	1.5HE W/FT		2.5HE W/FT		4.0HE W/FT	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
GZR	169	98	266	98	411	98
25D	162	98	256	98	385	98



VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


5 DIODE VISIBILITY



Optical lens
GZR - Grazer lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

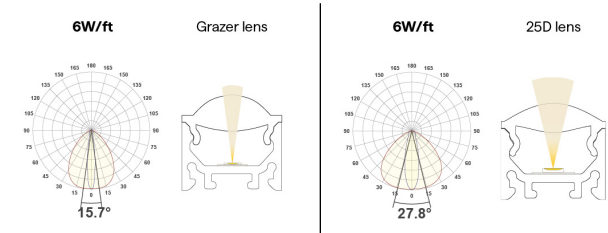


TEMPERATURE RATINGS


		DW 1.5 HE W/FT						DW 2.5 HE W/FT				DW 4.0 HE W/FT			
		WD 6.0 W/FT		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply		Q-Tran power supply other than DALI, DMX		DALI, DMX, or non-Q-Tran power supply	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
DRY	Ambient Operating Temp - Surface	-4°F	115°F	-4°F	145°F	-4°F	135°F	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	110°F
DMP	Ambient Operating Temp - Surface	—	—	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
WET	Ambient Operating Temp - Surface	-4°F	110°F	-4°F	140°F	-4°F	130°F	-4°F	130°F	-4°F	115°F	—	—	—	—
PENC	Ambient Operating Temp - Surface	—	—	-4°F	135°F	-4°F	120°F	-4°F	125°F	-4°F	105°F	—	—	—	—

6 EXTERNAL LOUVER

PLASTIC

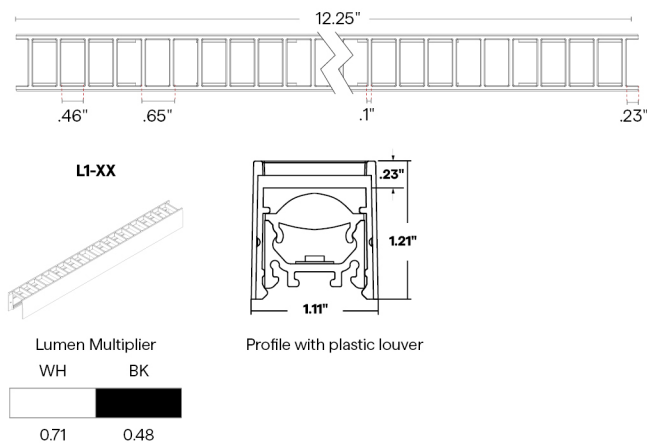

METAL

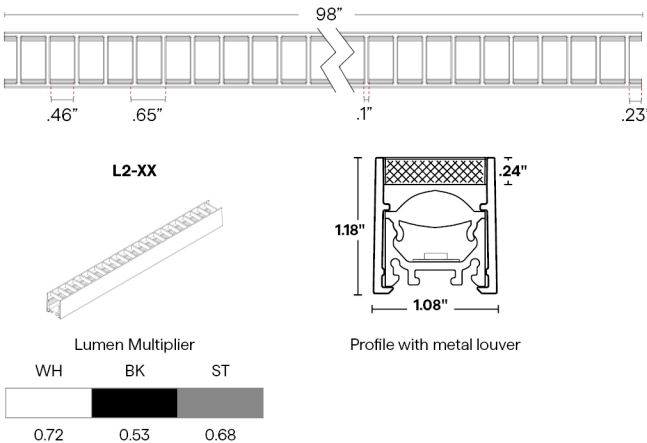




VERS-GRAZER (04) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Surface & Recessed

7 WIRE INPUT/OUTPUT


SINGLE (Input only)

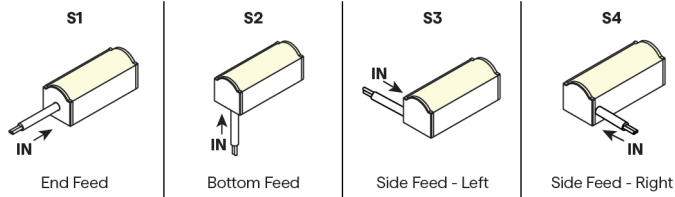

PASS THROUGH (Input/Output)

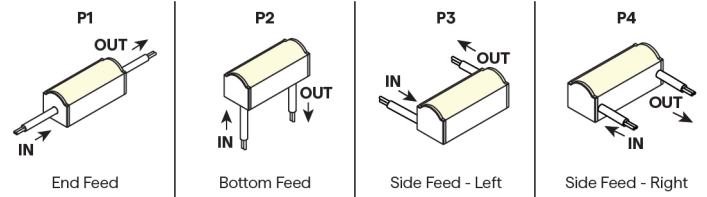


CONFIGURATION OPTIONS

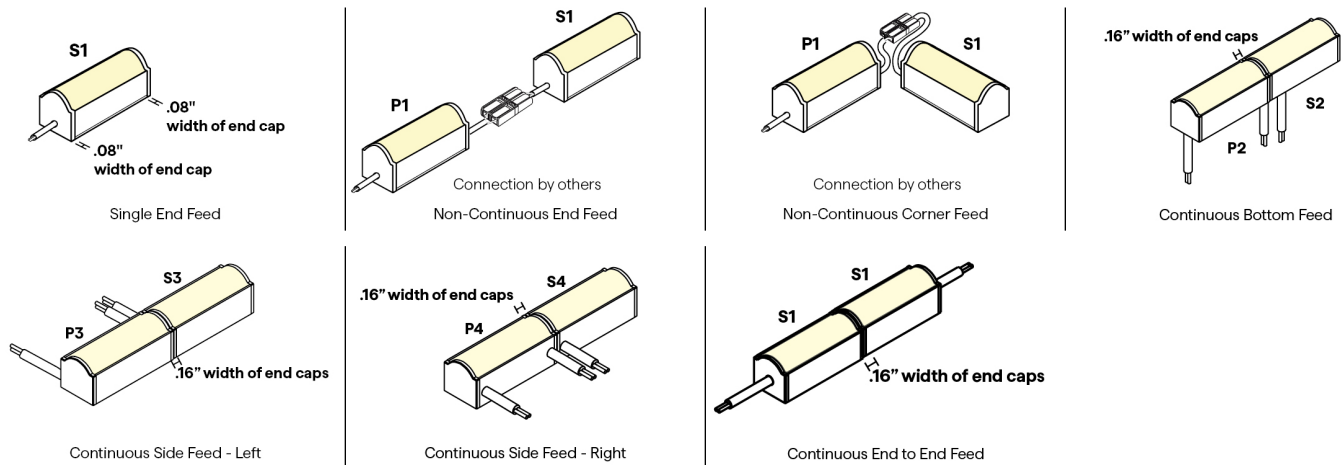

8 / 9 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product.

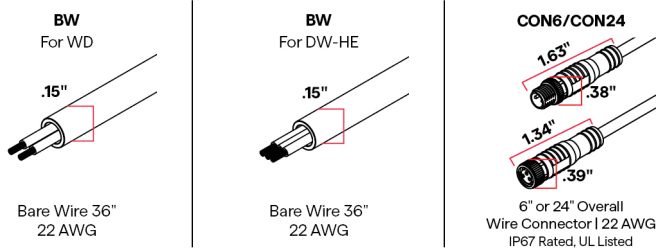

10 WIRE COLOR






VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

12 MOUNTING

CC
(CC-01)




Concealed Clip

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-01 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

CC
(CC-02)




Louver Concealed Clip
Required if L1 or L2 Louver is selected

2 pieces of hardware provided for 4' or less; 4 pieces of hardware provided for greater than 4'

To order separately use CC-02 (sold in pairs)

Each clips comes with a #4 x 5/8" Flat Head screw.

MG




Magnet Clip

One MG provided per foot

To order separately use MG-02

MMA-02




Magnet Mount
Accessory for MG-02

Sold separately, to order use MMA-02

Each clip comes with a #6 Flat Screw

Required when mounting to a non-magnetic surface

TBC-03



Plastic T-Bar Clip


Use on 9/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-03

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-04



Plastic T-Bar Clip


Use on 15/16" Flat or Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-04

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-05



Plastic T-Bar Clip


Use on 9/16" Tegular Drop Ceiling or with Louver on 9/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-05

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-06



Plastic T-Bar Clip


Use with Louver on 9/16" Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-06

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-07



Plastic T-Bar Clip


Use with Louver on 15/16" Flat Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-07

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

TBC-08



Plastic T-Bar Clip

Use with Louver on 15/16" Tegular Drop Ceiling; not compatible with PENC

2 clips provided for first 12"; 1 clip provided for each additional 12" or less length. 1 T-Bar Mounting Jig included with each fixture.

To order separately use TBC-08

Each pair of clips comes with M2.5 x 4mm set screw and Allen key

13 FINISH



Custom finishes require a longer lead time, consult factory




VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed


15 EXACT/OPTIMAL FIXTURE LENGTH

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.


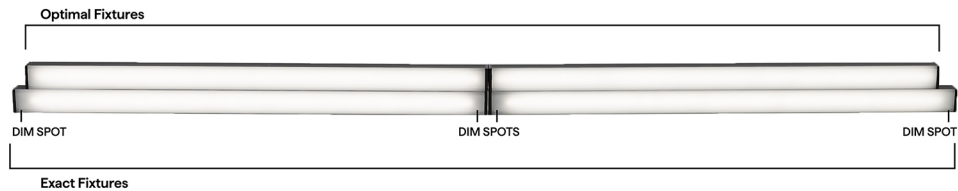


WD DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2  End Feed  Bottom Feed	P1 & P2  End Feed  Bottom Feed	S3 & S4  Side Feed - Left  Side Feed - Right	P3 & P4  Side Feed - Left  Side Feed - Right
12"	10.49"	10.74"	10.34"	10.44"
13"	12.49"	12.74"	12.34"	12.44"
14"	12.49"	12.74"	12.34"	12.44"
15"	14.49"	14.74"	14.34"	14.44"
16"	14.49"	14.74"	14.34"	14.44"
17"	16.49"	16.74"	16.34"	16.44"
18"	16.49"	16.74"	16.34"	16.44"
19"	18.49"	18.74"	18.34"	18.44"
20"	18.49"	18.74"	18.34"	18.44"
21"	20.49"	20.74"	20.34"	20.44"
22"	20.49"	20.74"	20.34"	20.44"
23"	22.49"	22.74"	22.34"	22.44"
24"	22.49"	22.74"	22.34"	22.44"
36"	34.49"	34.74"	34.34"	34.44"
48"	46.49"	46.74"	46.34"	46.44"
60"	58.49"	58.74"	58.34"	58.44"
72"	70.49"	70.74"	70.34"	70.44"
84"	82.49"	82.74"	82.34"	82.44"
96"	94.49"	94.74"	94.34"	94.44"




VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

WD WET LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture 
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH

Requested Nominal Length	S1 & S2 	P1 & P2 	S3 & S4 	P3 & P4 
12"	10.69"	10.84"	10.59"	10.69"
13"	12.69"	12.84"	12.59"	12.69"
14"	12.69"	12.84"	12.59"	12.69"
15"	14.69"	14.84"	14.59"	14.69"
16"	14.69"	14.84"	14.59"	14.69"
17"	16.69"	16.84"	16.59"	16.69"
18"	16.69"	16.84"	16.59"	16.69"
19"	18.69"	18.84"	18.59"	18.69"
20"	18.69"	18.84"	18.59"	18.69"
21"	20.69"	20.84"	20.59"	20.69"
22"	20.69"	20.84"	20.59"	20.69"
23"	22.69"	22.84"	22.59"	22.69"
24"	22.69"	22.84"	22.59"	22.69"
36"	34.69"	34.84"	34.59"	34.69"
48"	46.69"	46.84"	46.59"	46.69"
60"	58.69"	58.84"	58.59"	58.69"
72"	70.69"	70.84"	70.59"	70.69"
84"	82.69"	82.84"	82.59"	82.69"
96"	94.69"	94.84"	94.59"	94.69"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+0-10V QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-BOWTIE+DIMMER QZ-DMX QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+DALI-DT6 QOM-eLED+DALI-DT8 QOM-eLED+PS-DALI-DT6 QOM-eLED+PS-DALI-DT8 QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QOM-eLED+DALI-DT6 QOM-eLED+PS-DALI-DT6 QZ-DMX QZ-PH/0-10V
1%	QZ-DALI-DT8	QTM-eLED(E) QZ-DALI-DT6	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT6 QZ-DALI-DT6
10%	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		












VERS-GRAZER (04) FOR WARM DIM APPLICATIONS



24VDC Linear Fixtures - Surface & Recessed

DIMMING PROTOCOL	INDOOR		OUTDOOR	
	DW-HE Warm Dim Applications	WD	DW-HE Warm Dim Applications	WD
Phase	QZ-DW	QT-CAB-QZ-PH/0-10V QTM-eLED(E) QZ-BOWTIE+DIMMER QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QZ-DW	Q-SET-QZ-PH/0-10V QZ-PH/0-10V
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW	QT-CAB-QZ-PH/0-10V QT-CAB-eLED+0-10V QTM-eLED+0-10V QZ-PH/0-10V QZ-STICK-PH/0-10V QZLP	Q-SET-QZ-DW QOM-eLED+WD QZ-DW	Q-SET-QZ-PH/0-10V Q-SET-eLED+0-10V QOM-eLED+0-10V QZ-PH/0-10V
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN	QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6-AWN		
ECO System		QTM-eLED(E)		
DMX If using DW LED, wattage must be doubled		QZ-DMX		QZ-DMX
DALI-2: DT6 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT6-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT6-AWN QZ-DALI-DT6	QOM-eLED+DALI-DT6	Q-SET+QZ-DALI-DT6 QOM-eLED+DALI-DT6 QZ-DALI-DT6
DALI-2: DT8 If using DW LED, wattage must be doubled except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8		Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8	
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle	Non-Dim Power Supply with SW App Dongle		

COMPATIBLE MOUNTING ACCESSORIES

HINGE - HMB-M  1.41" .71" Adjustable mounting bracket - Medium	HINGE - HMB-L  1.46" 1.29" Adjustable mounting bracket - Large	HINGE - HMB-XL  4" 1.46" Adjustable mounting bracket - XLarge	Q-PIVOT  .75" 1.03" Small mounting accessory	Q-ANGLE  2.23" 1.38" Adjustable mounting accessory	NU-GRAZER  U Mounting Bracket	NJ-GRAZER  J Mounting Bracket	BL-GRAZER  Backwards L Mounting Bracket	MMA-02  1.86" 12" .64" .58" Magnet Mount Accessory for MG-02
--	--	---	--	--	---	--	---	--

COMPATIBLE WIRING ACCESSORIES

Q-mini-J  2" 1.25" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)	Q-mini-J5  2.80" 2.27" UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)
---	---



VERS-GRAZER (04) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Surface & Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage