





MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

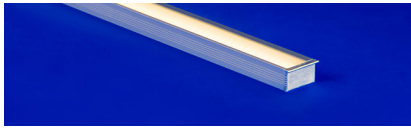

- MICRO 5 Series linear LED fixture engineered for exceptional light quality and even distribution, seamlessly blending with millwork details
- Asymmetrical fixture with 110° focused beam 30° off-nadir
- Ideal for recessed installations that call for low-profile light in small areas
- Used in applications to provide warmer CCTs as the light is dimmed
- When using DALI and DMX power supplies, LED wattage must be doubled
- Consult factory for field assembly options

1	2	3	4	5	6	7	8	9	10	11	12	13	14
PRODUCT	WATTS/FT	CCT	RATED	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	WIRE COLOR	WIRE TYPE	MOUNTING	FINISH	LENGTH (IN)	EXACT/OPTIMAL
	2.0		DRY	DF						832			

Sample Part Number: **KCKR-01-DW-2.0-20/27-DRY-DF-S1A-BW-CLS-WH-CL2-832-ST-48"-E**

1 PRODUCT KCKR-01-DW KCKR-01-DW-USA Select USA option for BAA and BABA projects. LED engine is built with 3 wires requiring 0-10V, DMX or DALI control. Using DALI, DMX, or non QTL power supplies may double watts/ft. See following pages for compatible power supplies.	2 WATTS/FT 2.0 2.0W/ft	3 CCT 20/27 2000K/2700K 20/30 2000K/3000K 27/40 2700K/4000K 27/55 2700K/5500K	4 RATED DRY IP20	5 LENS DF Diffused For representation of LED visibility, see Diode Visibility section on following pages. For beam angles, see Photometric Performance section on following pages	
6 WIRE INPUT/OUTPUT S1A Single 1 (Input only) - End Feed S1B Single 1 (Input only) - End Feed S2A Single 2 (Input only) - Bottom Feed S2B Single 2 (Input only) - Bottom Feed For continuous mounting, consider bottom feed. P1A Pass Through 1 (Input/output) - End Feed P1B Pass Through 1 (Input/output) - End Feed P2A Pass Through 2 (Input/output) - Bottom Feed P2B Pass Through 2 (Input/output) - Bottom Feed For continuous mounting, consider bottom feed.	7 CONNECTOR/WIRE IN BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)	8 CONNECTOR/WIRE OUT CLS Closed End (No feed) BW Bare Wire (Standard 24") CON6 Connector 6" CON24 Connector 24" BW: Standard length is 24"; Max length is 120". Request custom length by writing in part number next to BW (example: BW48)			
9 WIRE COLOR WH White BK Black	10 WIRE TYPE CL2 Class 2 CL2P Plenum Rated CL2P only available with bare wire leads (BW)	11 MOUNTING 832 832 Silicone	12 FINISH ST Satin BK Black CU Custom Custom finishes require a longer lead time, consult factory	13 LENGTH (IN) Minimum length is 12", maximum length is 98.43" not including end caps. Contact us for lengths under 12".	14 EXACT/OPTIMAL E Exact specified length O Optimal illumination


5 year warranty | Warranty only valid with Q-Tran power supplies | Field modifications void warranty | Data subject to change, all data has +/- 5% tolerance



MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

1 PRODUCT - DIMENSIONS



Profile with flat lens

2 DELIVERED LUMENS

[Calculated L70 = 70000 hrs]
Tested with KCKR-01-DW-2.0-**-DRY

	2000K		2700K		3000K		4000K		5500K	
	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI	LM/FT	CRI
DF	110	94	116	97	124	98	128	98	136	97


5 DIODE VISIBILITY



DF - Diffused lens

PHOTOMETRIC PERFORMANCE

Nominal beam spread shown, beam spread varies based on light engine. For more detailed information, see photometric data.

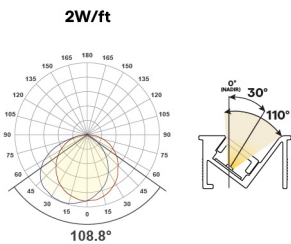

DF lens at 3000K

TEMPERATURE RATINGS

		DW 2.0 W/FT		DW 4.0 W/FT	
		QTL power supply other than DALI, DMX		DALI, DMX, or non-QTL power supply	
		Min	Max	Min	Max
DRY	Ambient Operating Temp - Recessed	-4°F	130°F	-4°F	110°F




MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS


24VDC Linear Fixtures - Recessed

6 WIRE INPUT/OUTPUT


ASYMMETRIC ONLY SINGLE (Input only)

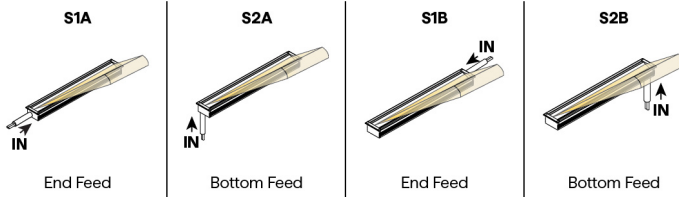

ASYMMETRIC ONLY PASS THROUGH (Input/Output)

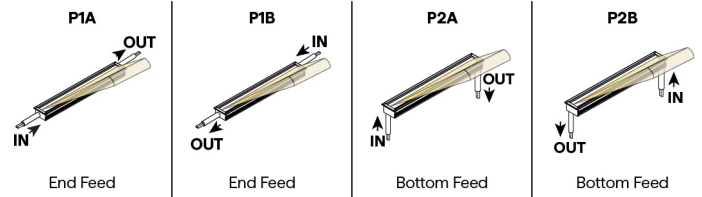


CONFIGURATION OPTIONS

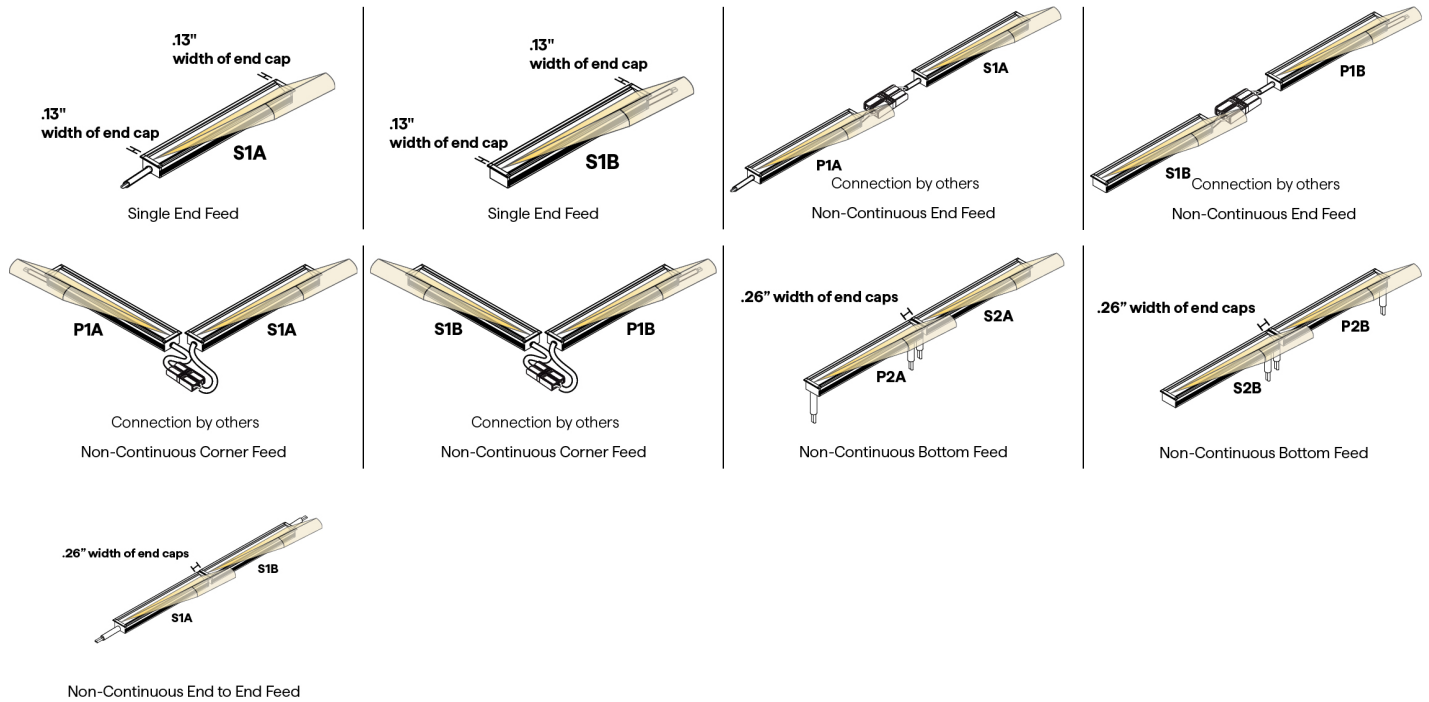

7 / 8 CONNECTOR/WIRE - IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out

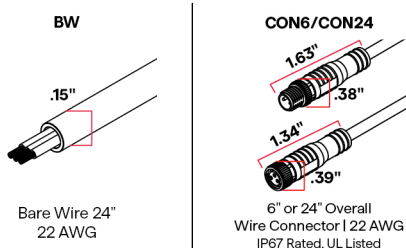

9 WIRE COLOR






MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

11 MOUNTING

832



832 Silicone

Sold separately

12 FINISH



Satin

Black


Custom finishes require a longer lead time, consult factory

15 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

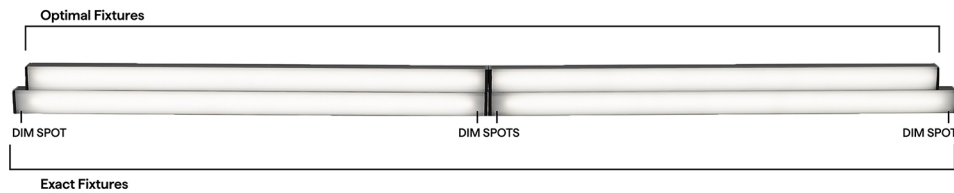



MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

DW DRY LENGTHS BY INCH

EXACT LENGTH

Requested Length	Potential dim spot on either end of a S1 fixture
	
12"	1"
13"	0.5"
14"	1"
15"	0.5"
16"	1"
17"	0.5"
18"	1"
19"	0.5"
20"	1"
21"	0.5"
22"	1"
23"	0.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH


Requested Nominal Length	S1A/B & S2A/B		P1A/B & P2A/B	
				
12"	10.50"		10.75"	
13"	12.50"		12.75"	
14"	12.50"		12.75"	
15"	14.50"		14.75"	
16"	14.50"		14.75"	
17"	16.50"		16.75"	
18"	16.50"		16.75"	
19"	18.50"		18.75"	
20"	18.50"		18.75"	
21"	20.50"		20.75"	
22"	20.50"		20.75"	
23"	22.50"		22.75"	
24"	22.50"		22.75"	
36"	34.50"		34.75"	
48"	46.50"		46.75"	
60"	58.50"		58.75"	
72"	70.50"		70.75"	
84"	82.50"		82.75"	
96"	94.50"		94.75"	

14 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

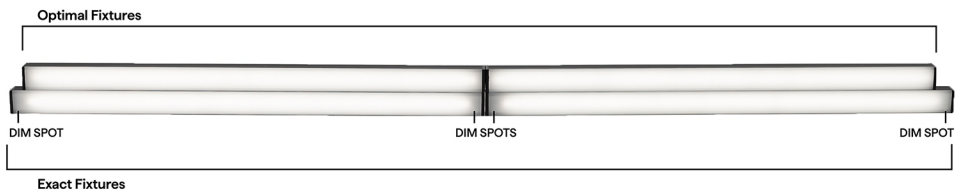



MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed


COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR
	MICRO 5-DW Warm Dim Applications
0.1%	QT-CAB-eLED+DALI-DT6 QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT6 QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DMX QZ-DW
1%	QZ-DALI-DT8
10%	Non-Dim Power Supply with WD App Dongle

DIMMING PROTOCOL	INDOOR
	MICRO 5-DW Warm Dim Applications
Phase	QZ-DW
0-10V	QT-CAB-eLED+WD QT-CAB-eLED+WD-AWN QTM-eLED+WD QTM-eLED+WD-AWN QZ-DW
Lutron Athena	QT-CAB-eLED+DALI-DT8-AWN QT-CAB-eLED+WD-AWN QTM-eLED+DALI-DT8-AWN QTM-eLED+WD-AWN
DMX LED wattage must be doubled for DW-HE products	QZ-DMX
DALI-2: DT6 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT6 QTM-eLED+DALI-DT6
DALI-2: DT8 LED wattage must be doubled for DW-HE products except for AWN	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DALI-DT8-AWN QTM-eLED+DALI-DT8 QTM-eLED+DALI-DT8-AWN QZ-DALI-DT8
SCENE App Dimmed	Non-Dim Power Supply with WD App Dongle

COMPATIBLE WIRING ACCESSORIES



UL Listed, miniature junction box, DRY/DMP (WET rated with silicone)



MICRO 5 KICKER-FLAT (01) FOR WARM DIM APPLICATIONS

24VDC Linear Fixtures - Recessed

COMPATIBLE CONTROL ACCESSORIES

SCENE APP DONGLE



Wi-Fi or Bluetooth
Connectivity

COMPATIBLE APPS

NFC APP



Read and write
DMX addresses and
adjust voltage