





Q-CAP LUME-01 RGB

24VDC Flexible Fixtures



- Flexible encapsulated fixture
- Three-sided illumination
- Up/down bend
- 6" bend radius
- Interior and exterior rated (not including FC)
- Three different mounting options
- Do not cut Non-Field Cuttable Q-CAP flexible fixtures

ORDERING PROCESS

A Specify Non-Field Cuttable Q-CAP

B (Optional) Specify field cuttable 4' piece - used to adjust total run length in the field (dry applications only)

A. NON-FIELD CUTTABLE Q-CAP

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/OPTIMAL
LUME-01-RGB			RGB	6.0	ENC/TL				TL		

Sample Part Number: LUME-01-RGB-MC-DRY-RGB-6.0-ENC/TL-P1-BW-BW-N/A-48"-E

<div>A1</div> <div>PRODUCT</div> <div>LUME-01-RGB</div> <div>See last page for compatible power supplies.</div>	<div>A2</div> <div>MOUNTING</div> <div><div>MC</div><div>PPS-LP-CL-2</div><div>PPS-LP-CL-96</div><div>WSC</div></div> <div><div>Magnetic Clip</div><div>Clear PVC Clip</div><div>Clear PVC Channel</div><div>White Snug Clip</div></div> <div>White snug clip only for indirect cove use, not intended for hanging fixtures upside down.</div>	<div>A3</div> <div>RATED</div> <div><div>DRY</div><div>WET</div></div> <div><div>IP20</div><div>IP67</div></div>	<div>A4</div> <div>CCT</div> <div>RGB</div>	<div>A5</div> <div>WATTAGE</div> <div><div>6.0</div><div>6.0W-SO</div></div> <div>SO: Standard Output</div>
<div>A6</div> <div>LENS</div> <div><div>ENC/TL</div><div>Encapsulated in Translucent</div></div> <div>For representation of LED visibility, see Diode Visibility section on following pages</div>	<div>A7</div> <div>WIRE INPUT/OUTPUT</div> <div><div>S1</div><div>Single 1 (Input only) - End Feed</div></div> <div><div>P1</div><div>Pass Through 1 (Input/Output) - End Feed</div></div>	<div>A8</div> <div>CONNECTOR/WIRE IN</div> <div><div>BW</div><div>CON6</div><div>CON24</div></div> <div><div>Bare Wire (Standard 24")</div><div>Connector 6"</div><div>Connector 24"</div></div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	<div>A9</div> <div>CONNECTOR/WIRE OUT</div> <div><div>N/A</div><div>Closed End (No feed)</div></div> <div><div>BW</div><div>CON6</div><div>CON24</div></div> <div><div>Bare Wire (Standard 24")</div><div>Connector 6"</div><div>Connector 24"</div></div> <div>BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)</div>	
<div>A10</div> <div>END CAPS</div> <div><div>TL</div><div>Translucent</div></div> <div><div>N/A</div><div>Not Applicable</div></div>	<div>A11</div> <div>LENGTH (IN)</div> <div><div>Minimum length is 12", maximum length is 191" not including end caps. Contact us for lengths under 12". Available in 2" increments.</div></div>	<div>A12</div> <div>EXACT/OPTIMAL</div> <div><div>O</div><div>E</div></div> <div><div>Optimal Illumination</div><div>Exact Specified Length</div></div> <div>Exact fixtures are the exact length specified +0 - 1/8". Optimal fixtures' length is rounded down with illumination end to end. See Exact/Optimal Fixture Length charts.</div>		

Up/Down Bend | Data subject to change, all data has +/- 5% tolerance | Only FC fixtures are Field-Cuttable per installation instructions | Field Cuttable is not returnable or refundable after it has been cut



Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

B. FIELD CUTTABLE Q-CAP

B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12
PRODUCT	MOUNTING	RATED	CCT	WATTAGE	LENS	WIRE INPUT/OUTPUT	CONNECTOR/WIRE IN	CONNECTOR/WIRE OUT	END CAPS	LENGTH (IN)	EXACT/OPTIMAL
LUME-01-FC-RGB		DRY	RGB	6.0	ENC/TL	S1		N/A	TL	48"	N/A

Sample Part Number: LUME-01-RGB-MC-DRY-RGB-6.0-ENC/TL-P1-BW-BW-N/A-48"-E

B1

PRODUCT

LUME-01-FC-RGB

See last page for compatible power supplies.

B2

MOUNTING

MC

PPS-LP-CL-2

PPS-LP-CL-96

WSC

Magnetic Clip

Clear PVC Clip

Clear PVC Channel

White Snug Clip

White snug clip only for indirect cove use, not intended for hanging fixtures upside down.

B3

RATED

DRY IP20

B4

CCT

RGB

B5

WATTAGE

6.0

6.0W-SO

SO: Standard Output

B6

LENS

ENC/TL

Encapsulated in Translucent

For representation of LED visibility, see Diode Visibility section on following pages

B7

WIRE INPUT/OUTPUT

S1

Single 1 (Input only) - End Feed

B8

CONNECTOR/WIRE IN

BW

CON6

CON24

Bare Wire (Standard 24")

Connector 6"

Connector 24"

BW: Standard length is 24". Max length is 120". Request custom length by writing in part number next to BW (example: BW48)

B9

CONNECTOR/WIRE OUT

N/A

Closed End (No feed)

B10

END CAPS

TL

Translucent

B11

LENGTH (IN)

48"

Nominal

Starting Run length is 48.475" for S1

Each cut point subtracts from the Starting Run Length

6.0 has a 2" cut point

S1 can be cut down to as little as 2.475"

B12

EXACT/OPTIMAL

N/A


Single ▶



Q-CAP LUME-01 RGB

24VDC Flexible Fixtures


1 PRODUCT - DIMENSIONS



Profile
(Standard)


BEND RADIUS

Up/Down Bend




6" bending radius

FLEXIBILITY

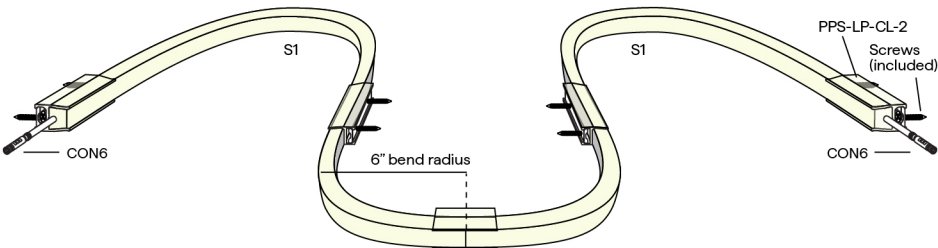

2 MOUNTING

WSC




White Snug Clip
Indirect uplight

To order separately use WSC

Each clip comes with a #6x5/8" flat screw

MC




Magnetic Clip
Cove use only

To order separately use MC

Each clip comes with a #6x5/8" flat screw


PPS-LP-CL-2



Low profile PC Mounting
Clip - Clear finish

To order separately use LUME-PPS-LP-CL-2

PPS-LP-CL-96



Low profile PC channel
96" straight linear run
Clear finish

To order separately use LUME-PPS-LP-CL-96

Each clip comes with a #8" flat screw

4 / 5 DELIVERED LUMENS

[Calculated L70 = 40000 hrs]
Tested with LUME-01-RGB-WSC-DRY

CCT	6.0W/FT Total Load		
	ENC/TL		Circuit Wattage
	LM	Wavelength	
Red	43	632	2.4
Green	109	522	1.9
Blue	29	469	1.7
All	169	***	6.0

6 DIODE VISIBILITY



ENC/CL - Clear encapsulation

ENC/TL - Translucent encapsulation



Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

BUG RATING


WATTAGE	B	U	G
5.0 (ALL CCTs)	B0	U1	G0

TEMPERATURE RATINGS


	5.0 W/FT	
	Min	Max
Ambient Operating Temp - Surface	-14°F	90°F
Storage Temp	-4°F	140°F
Installation Temp	50°F	100°F

7 WIRE INPUT/OUTPUT


SINGLE (Input only)




PASS THROUGH (Input/Output) - Only applicable for Non-Field Cuttable Q-CAP




CONFIGURATION OPTIONS

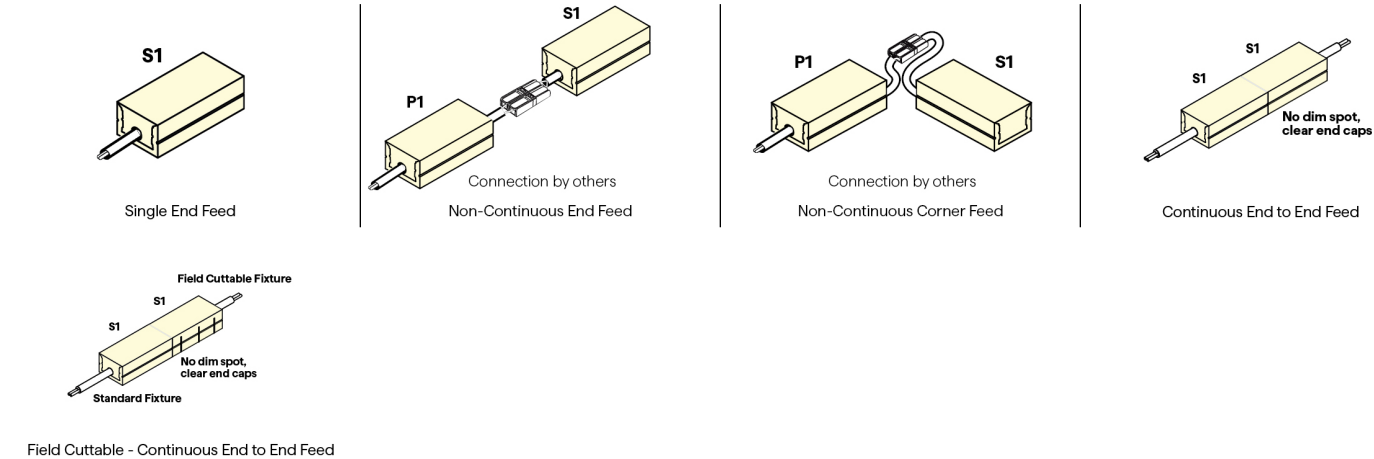

FIELD CUTTABLE MARKING

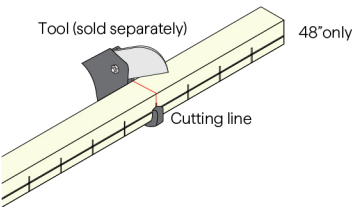

Field cuttable fixtures are sold in 4' increments and go at the end of a run, allowing for easy field adjustment



Note: Only FC fixtures are field cuttable — Do not attempt to cut non FC fixtures. Cut only on the marked cut lines. Only cut from non-feed end. Do not attempt to cut while power is on.




Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

8 / 9 CONNECTOR/WIRE – IN/OUT

Connector/Wire In or Out not needed to specify product. Typical selection is S1 for Wire Input/Output, BW for Connector/Wire In, N/A for Connector/Wire Out, and WH for End Caps





10 END CAPS (NO FEED)

TL

11 LENGTH - WIRING DETAIL

Available in 2" increments 12"-191"




Translucent endcaps
.0" added at end
.00" dim spot

12 EXACT/OPTIMAL FIXTURE LENGTH

[E/O Length Calculator →](#)

[E/O Explained →](#)

Exact fixtures are the exact length specified. Optimal fixtures' length is rounded down based on LED cut points to allow the fixture to be illuminated end to end. For runs with multiple fixtures that need to fill a specific length, it's recommended to order all optimal fixtures with an exact fixture at the end of the run.

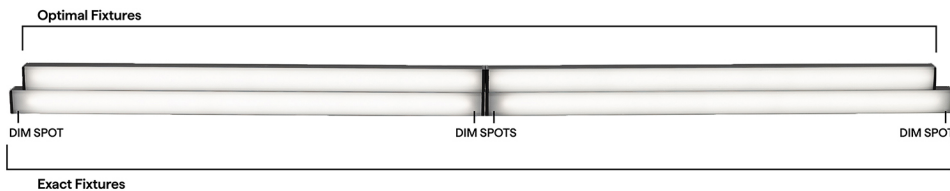



Q-CAP LUME-01 RGB

24VDC Flexible Fixtures



RGB LENGTHS BY INCH

Available in any length in between 12" and 191", chart below shows example lengths. Exact fixtures are the length specified. Optimal fixtures' length is rounded down with illumination end to end. All fixtures' tolerance is +0 - 1/8". Consult factory for lengths under 12".

EXACT LENGTH

Requested Length	Potential dim spot on either end of fixture
12"	1"
13"	.5"
14"	1"
15"	.5"
16"	1"
17"	.5"
18"	1"
19"	.5"
20"	1"
21"	.5"
22"	1"
23"	.5"
24"	1"
36"	1"
48"	1"
60"	1"
72"	1"
84"	1"
96"	1"

OPTIMAL LENGTH: highlighted rows are closest to requested nominal length

Requested Nominal Length	S1	P1
		
12"	10.58"	10.95"
13"	12.58"	12.95"
14"	12.58"	12.95"
15"	14.58"	14.95"
16"	14.58"	14.95"
17"	16.58"	16.95"
18"	16.58"	16.95"
19"	18.58"	18.95"
20"	18.58"	18.95"
21"	20.58"	20.95"
22"	20.58"	20.95"
23"	22.58"	22.95"
24"	22.58"	22.95"
36"	34.58"	34.95"
48"	46.58"	46.95"
60"	58.58"	58.95"
72"	70.58"	70.95"
84"	82.58"	82.95"
96"	94.58"	94.95"

COMPATIBLE POWER SUPPLIES

See power supplies cut sheets for more information. Data subject to change, all data has +/- 5% tolerance.

DIM TO LEVEL	INDOOR	OUTDOOR
	RGB	RGB
0.1%	QT-CAB-eLED+DALI-DT8 QT-CAB-eLED+DMX QTM-eLED+DALI-DT8 QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DALI-DT8 QOM-eLED+DMX QOM-eLED+PS-DALI-DT8 QZ-DMX
1%	QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QZ-DALI-DT8
10%	Non-Dim Power Supply with RGB App Dongle	


DIMMING PROTOCOL	INDOOR	OUTDOOR
	RGB	RGB
DMX	QTM-eLED+DMX QZ-DMX	Q-SET-QZ-DMX QOM-eLED+DMX QZ-DMX
DALI-2: DT8	QT-CAB-eLED+DALI-DT8 QTM-eLED+DALI-DT8 QZ-DALI-DT8	Q-SET+QZ-DALI-DT8 QOM-eLED+DALI-DT8 QZ-DALI-DT8



Q-CAP LUME-01 RGB

24VDC Flexible Fixtures

COMPATIBLE MOUNTING ACCESSORIES



COMPATIBLE WIRING ACCESSORIES



COMPATIBLE CONTROL ACCESSORIES



COMPATIBLE APPS

